Kodak

FCO 512-00422A

Installing Creo Feature Licensing Server

Document number: 719-00813A Rev A
Release date: 20 Mar 2007

Applies to

- Kodak® Magnus™ 400 platesetter
- Kodak Magnus 400 Quantum platesetter

Priority: Next visit

Description

The Creo Feature Licensing (CFL) Server is an integrated feature license management system that provides feature control management for multiple applications. Its purpose is to:

- Protect Kodak device features in a flexible, consistent, and secure manner
- Protect the value of Kodak service tools

Important: The CFL is included in the Kodak Magnus 400 Controller 1.02.392 software.

Time required 1 hour

Prerequisites:

- Magnus 400 Controller 1.01.391.003 software with either Update 2 or 3
- Service dongle
- Kodak Service Shell 2.6 SP2 (included on the Magnus 400 Creo Feature Licensing Server CD)
- Microsoft® Windows® 2000 operating system

Parts included in FCO

Part Number	Part Name	Quantity
651-00701A	Magnus 400 Creo Feature Licensing Server CD	1
651-00704A	FCO Updater utility for Magnus 400 CD	1
719-00813A	FCO document	1

Procedure

Important: The engineer must have a service dongle to perform this is FCO.

Installing Creo Feature License

1. Insert the **Kodak Feature Licensing Server** CD into the CD-ROM drive.
2. On the Windows desktop, double-click **My Computer**.
3. In the My Computer window, double-click drive **F:(SWSetup)**.
4. In the SWSetup window, double-click the **LicensingServer** folder.
5. In the LicensingServer window, double-click the **CreoFeatureLicensingServer.exe** file.
6. The InstallShield Wizard Welcome dialog box appears.
7. Click **Next**.
8. When the `Please remove all USB SuperPro dongles before continuing.` warning message appears, verify that no dongles are connected to the USB ports and click **Next**.
9. The Destination Folder dialog box appears with the correct path of the folder to which you want to install the license: **C:\Creo\FeatureLicense**.
10. Click **Next**.
11. The Ready to Install the Program dialog box appears.
12. Click **Install**.
13. After the software is successfully installed, the InstallShield Wizard Completed dialog box appears.
14. Click **Finish**.
15. When the following message appears, click **No**.
    `You must restart your system for the configuration changes made to Creo Feature Licensing Server to take effect. Click Yes to restart now or No if you plan to restart later.`
16. In the LicensingServer window, double-click the **database.bat** file.

    A DOS window appears and immediately closes, and three XML files are installed.


Installing Service Shell 2.6 With Service Pack 2

1. On the Windows desktop, double-click **My Computer**.
2. In the My Computer window, double-click drive **F:** (SWSetup).
3. In the SWSetup window, double-click the **Service Shell** folder.
4. In the Service Shell window, double-click the **Service Shell Host-CTP.exe** file.
5. When the `Service Host software seems to be running. Do you want to shut down and continue the installation?` message appears, click **Yes**.
6. The InstallShield Wizard Welcome dialog box appears.
7. Select **Upgrade/Reinstall** and click **Next**.
8. The Does This Workstation Require Multi Language Support? dialog box appears.
9. Select the **No** check box and click **Next**.

10. The Service Shell Host installation starts. After the software is successfully installed, the InstallShield Wizard Complete dialog box appears.
11. Click **Finish**.
12. Select the **No, I will restart my computer later** check box and click **OK**.
13. You have successfully completed installing the Service Shell Host.
14. Return to the Service Shell window and double-click the **Service Shell Client-CTP.exe** file.
15. The InstallShield Wizard Welcome dialog box appears.
16. Select **Upgrade/Reinstall** and click **Next**.
17. The Service Shell Client installation starts. When the `The service shell scripts were copied to the Backup\Script directory prior to the install.` message appears, click **OK**.
18. The InstallShield Wizard Complete dialog box appears.
19. Click **Finish**.
20. The Restart dialog box appears.
21. Select the **Yes, I want to restart my computer now.** check box and click **OK**.
22. After the computer restarts, remove the **Magnus 400 Accessories** CD from the CD-ROM drive.
23. If you have a service dongle, on the computer inside the platesetter, connect the service dongle to the USB port.



The Connection Dialog dialog box appears.

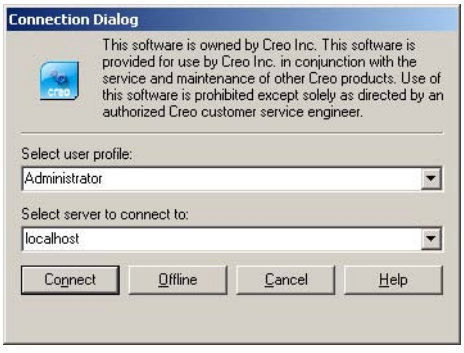

24. If you do not have a service dongle, perform the following steps:



a. On the Windows desktop, double-click the **Service Shell Client** icon.

   The Service Shell Login window appears.

b. In the **Please enter a valid password to continue** box, type the appropriate password and click **Login**.

   The Connection Dialog dialog box appears.

   Note: The password is updated periodically. To obtain the correct password, contact the system administrator.

25. Click Connect.

    The Service Shell workspace appears.

26. Quit Service Shell and remove the service dongle.

Upon completion	Verify that the green LED on the service dongle is illuminated.
Install FCO Tracker	Insert the CD and either double-click the **reg** file, or download the file from TechPlanet's FCO Updater / FCO Tracker page.
Technical contact	Alon Davidor
Date submitted	20 Mar 2007
Last updated	