Installing a Status Indicator on a Magnus 400 Quantum Platesetter with MCU

Document part number: 653-01491A-EN

Internal document number: 731-01300A-EN Rev B

Product

Kodak® Magnus™ 400 Quantum with MCU

Background

The status indicator is an optional feature that enables you to view the real-time status of the platesetter during operation, eliminating the need to view device-status information online.
Important: The status indicator is for Toppan, Japan *only*.

Prerequisites

Kodak Magnus 400 Controller 1.04.393 + Update 2 (and later)

Parts required


Part Number	Part Name	Quantity
500-06480A	Status indicator assembly **Important**: For Toppan, Japan *only*	1

Tools required


Double-sided tape

Procedure

1. Place a strip of double-sided tape on the top front-edge of the rear door and mount the status indicator on it.

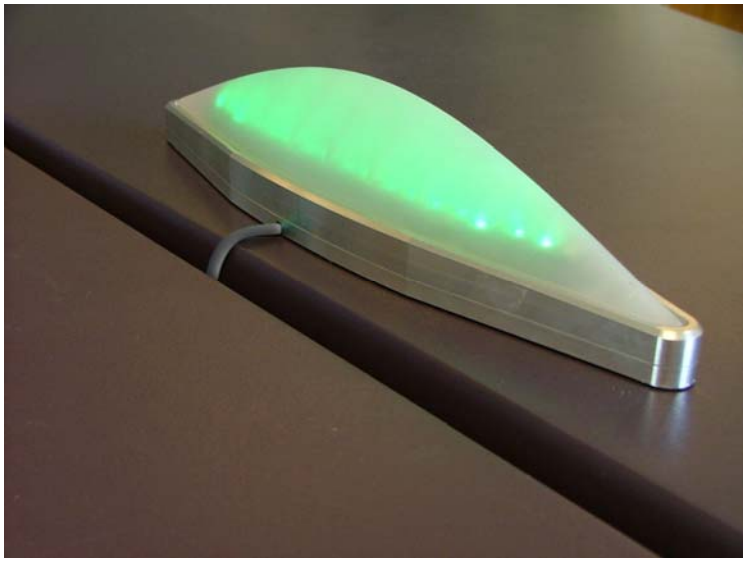


2. Mount cable-tie guides along the front and left side edges of the rear door down to the Local3 motherboard (left side door).

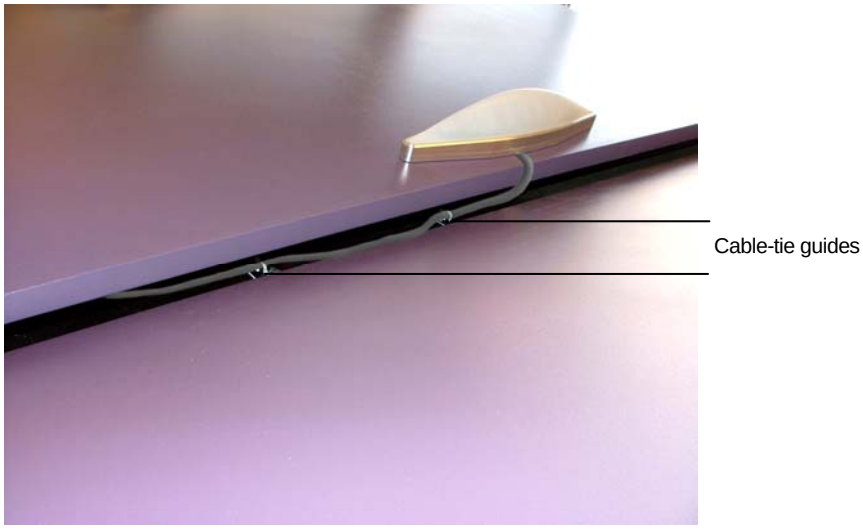

3. Route the status indicator cable along the cable-tie guides to the Local3 motherboard.



4. On the left side door above the E-box, connect the Molex® connector to J-13 on the Local3 motherboard.

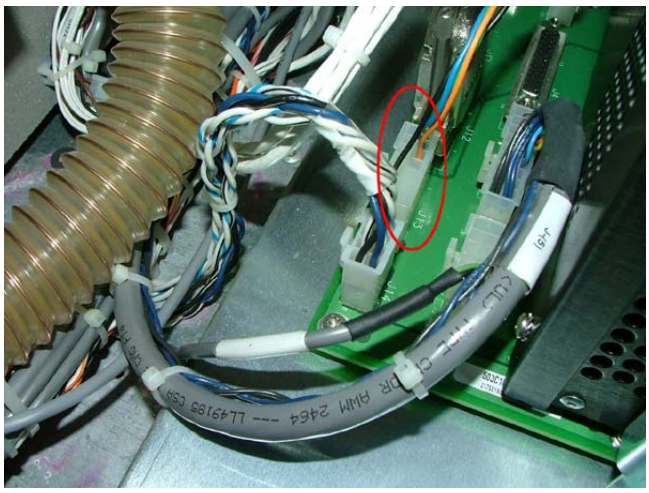

Technical contact	Mario Amir
Date submitted	25 Dec 2007
Last updated	18 Mar 2008