
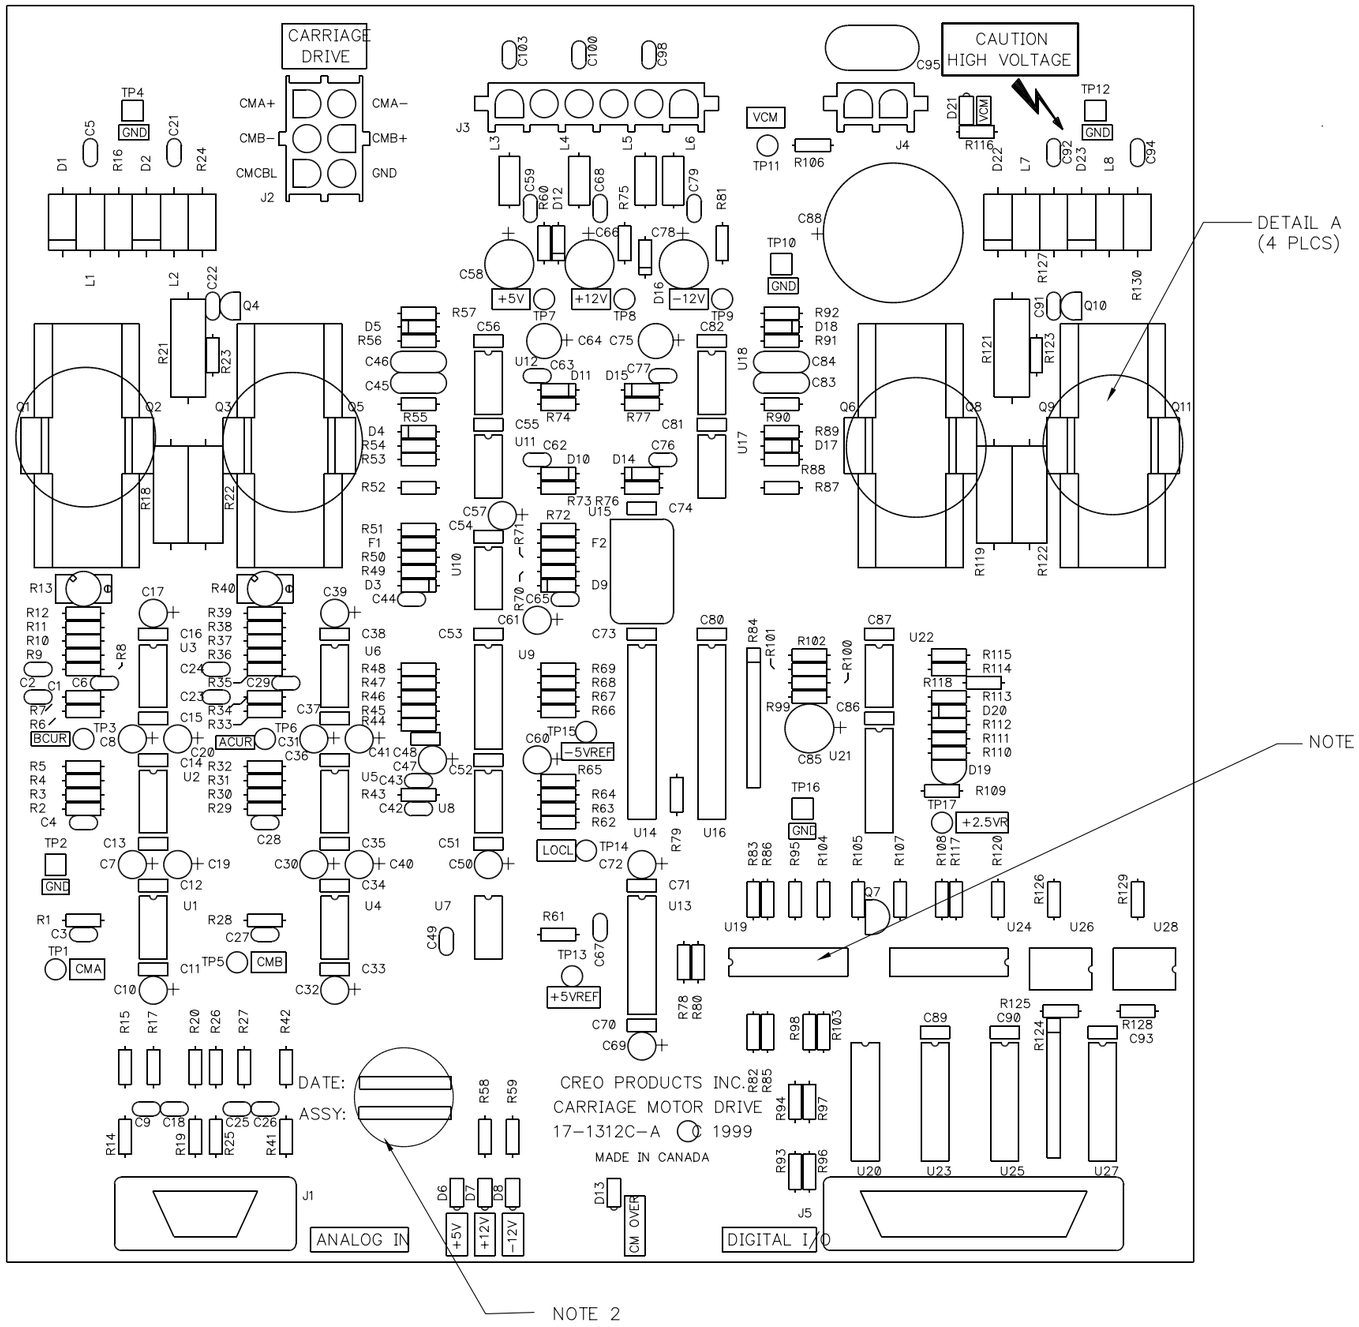


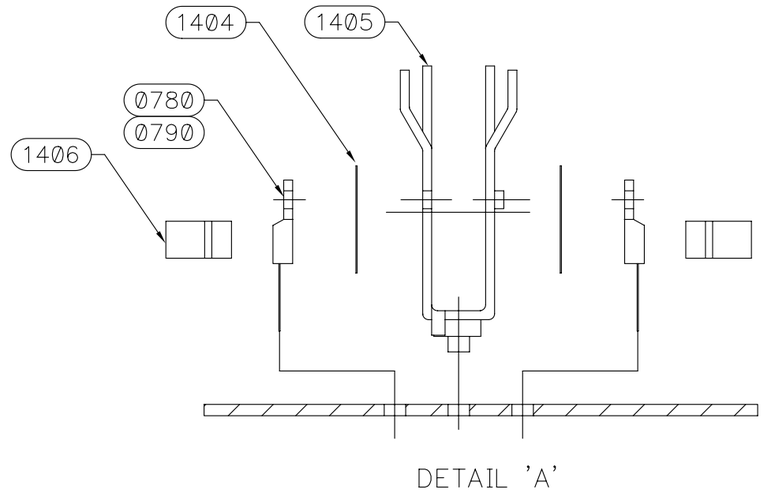

DETAIL 'A'

1) Install FETS and heatsinks as shown in detail A.
2) Record assembly number and date in permanent ink
   DATE: 09/09/96
   ASSY: 10–1418C–A
3) This chip is installed backwards compared to chips around it. Footprint as shown is correct.
4) Heatsinks on Q1,Q2,Q3,Q5,Q6,Q8,Q9 & Q11 must be soldered to P.C.B.

REV	ECO	DATE	BY	APPROVED
A	D200	1999: OCT: 15	S CHEUNG	S CHEUNG

CREO

CARRIAGE MOTOR DRIVE
SCN/TS
ASSEMBLY DRAWING

C COPYRIGHT CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY	DATE
G.PEREGRYM	D.FREEMAN	1996: SEPT: 30

THIRD ANGLE PROJECTION	STD UNITS	SIZE	SCALE
	mm	B	1:1.00

PART NO.	REV	DOC	SHEET	OF
10–1418C–A	AD	1	1	