
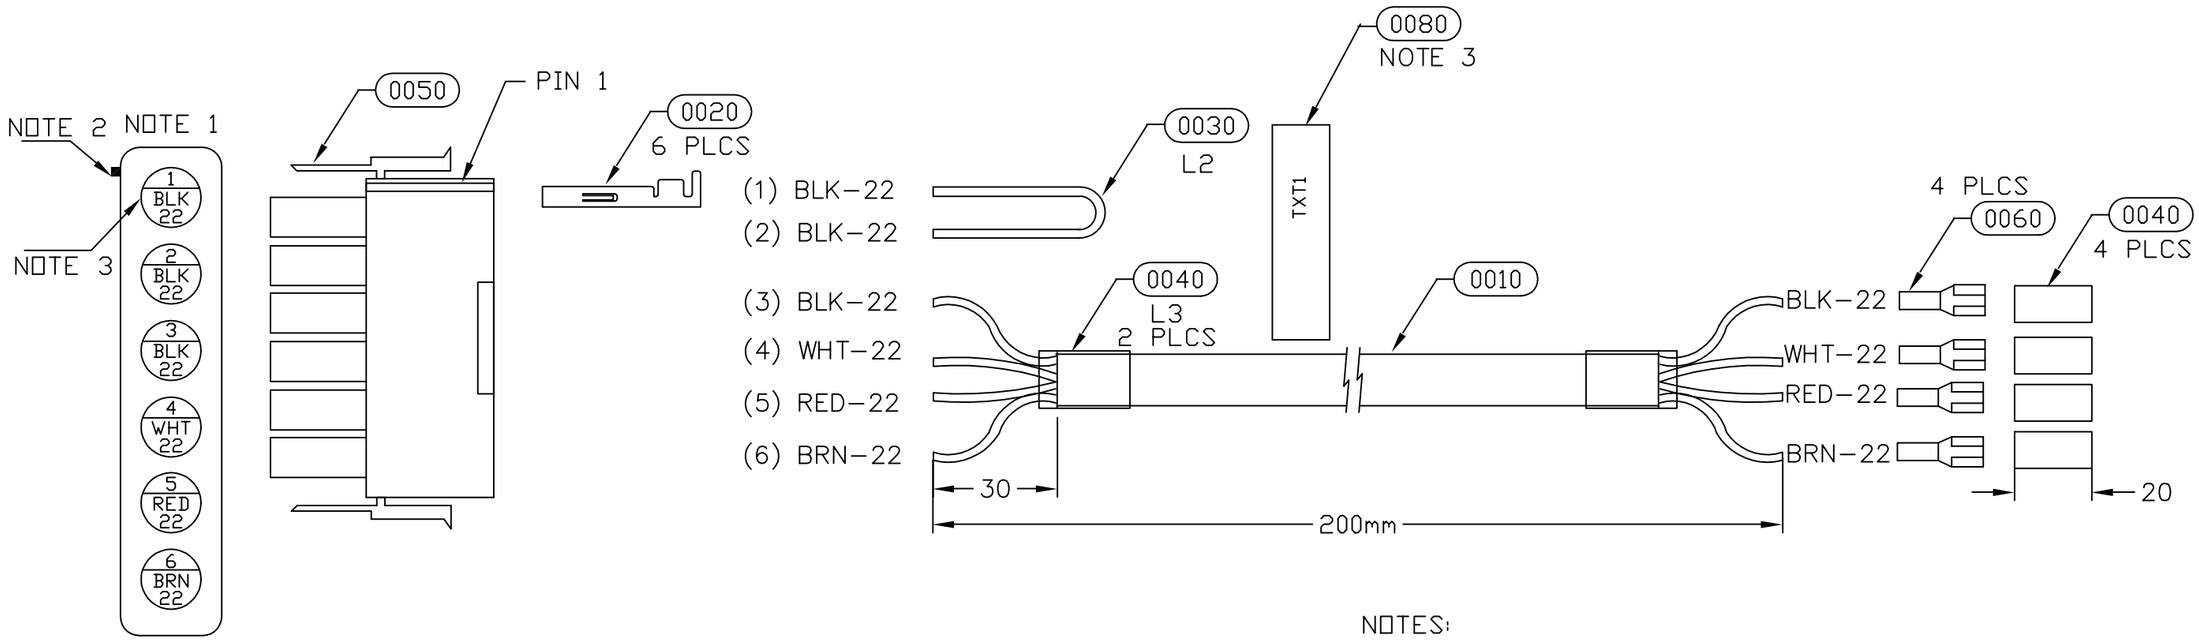


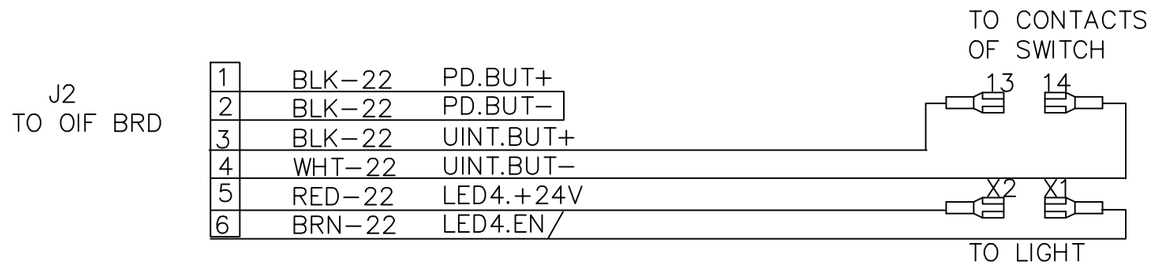

NOTES:

1. CONNECTIONS SHOWN FROM WIRE ENTRY SIDE.
2. TAB NEXT TO PIN 1.
3. 1 / BLK / 22 — PIN # / COLOR / WIRE GAUGE
4. STRIP 30mm OF JACKET OFF OF CABLES AT BOTH ENDS. CUT OFF GREEN WIRE AT BOTH ENDS OF CABLE.
5. EXTEND HEATSHRINK 5mm PAST END OF CABLE JACKET.
6. ATTACH LABEL 60mm FROM CONNECTOR END
7. STANDARD TOLERANCE +20/-0 UNLESS SPECIFIED.

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
B	E015	2001:FEB:13	S. CHEUNG	S. CHEUNG

CREO

ASSY,ELEC,START BUTTON
TS
ASSEMBLY DRAWING

© COPYRIGHT CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY			
R.LEVASSEUR	R.LEVASSEUR			
MILLIMETERS UNLESS SPECIFIED	DATE 1998:JAN:12	SIZE A	SCALE 1:1	
PART NO. 10-3187B-B	REV AD	DOC 1	SHEET 1	OF