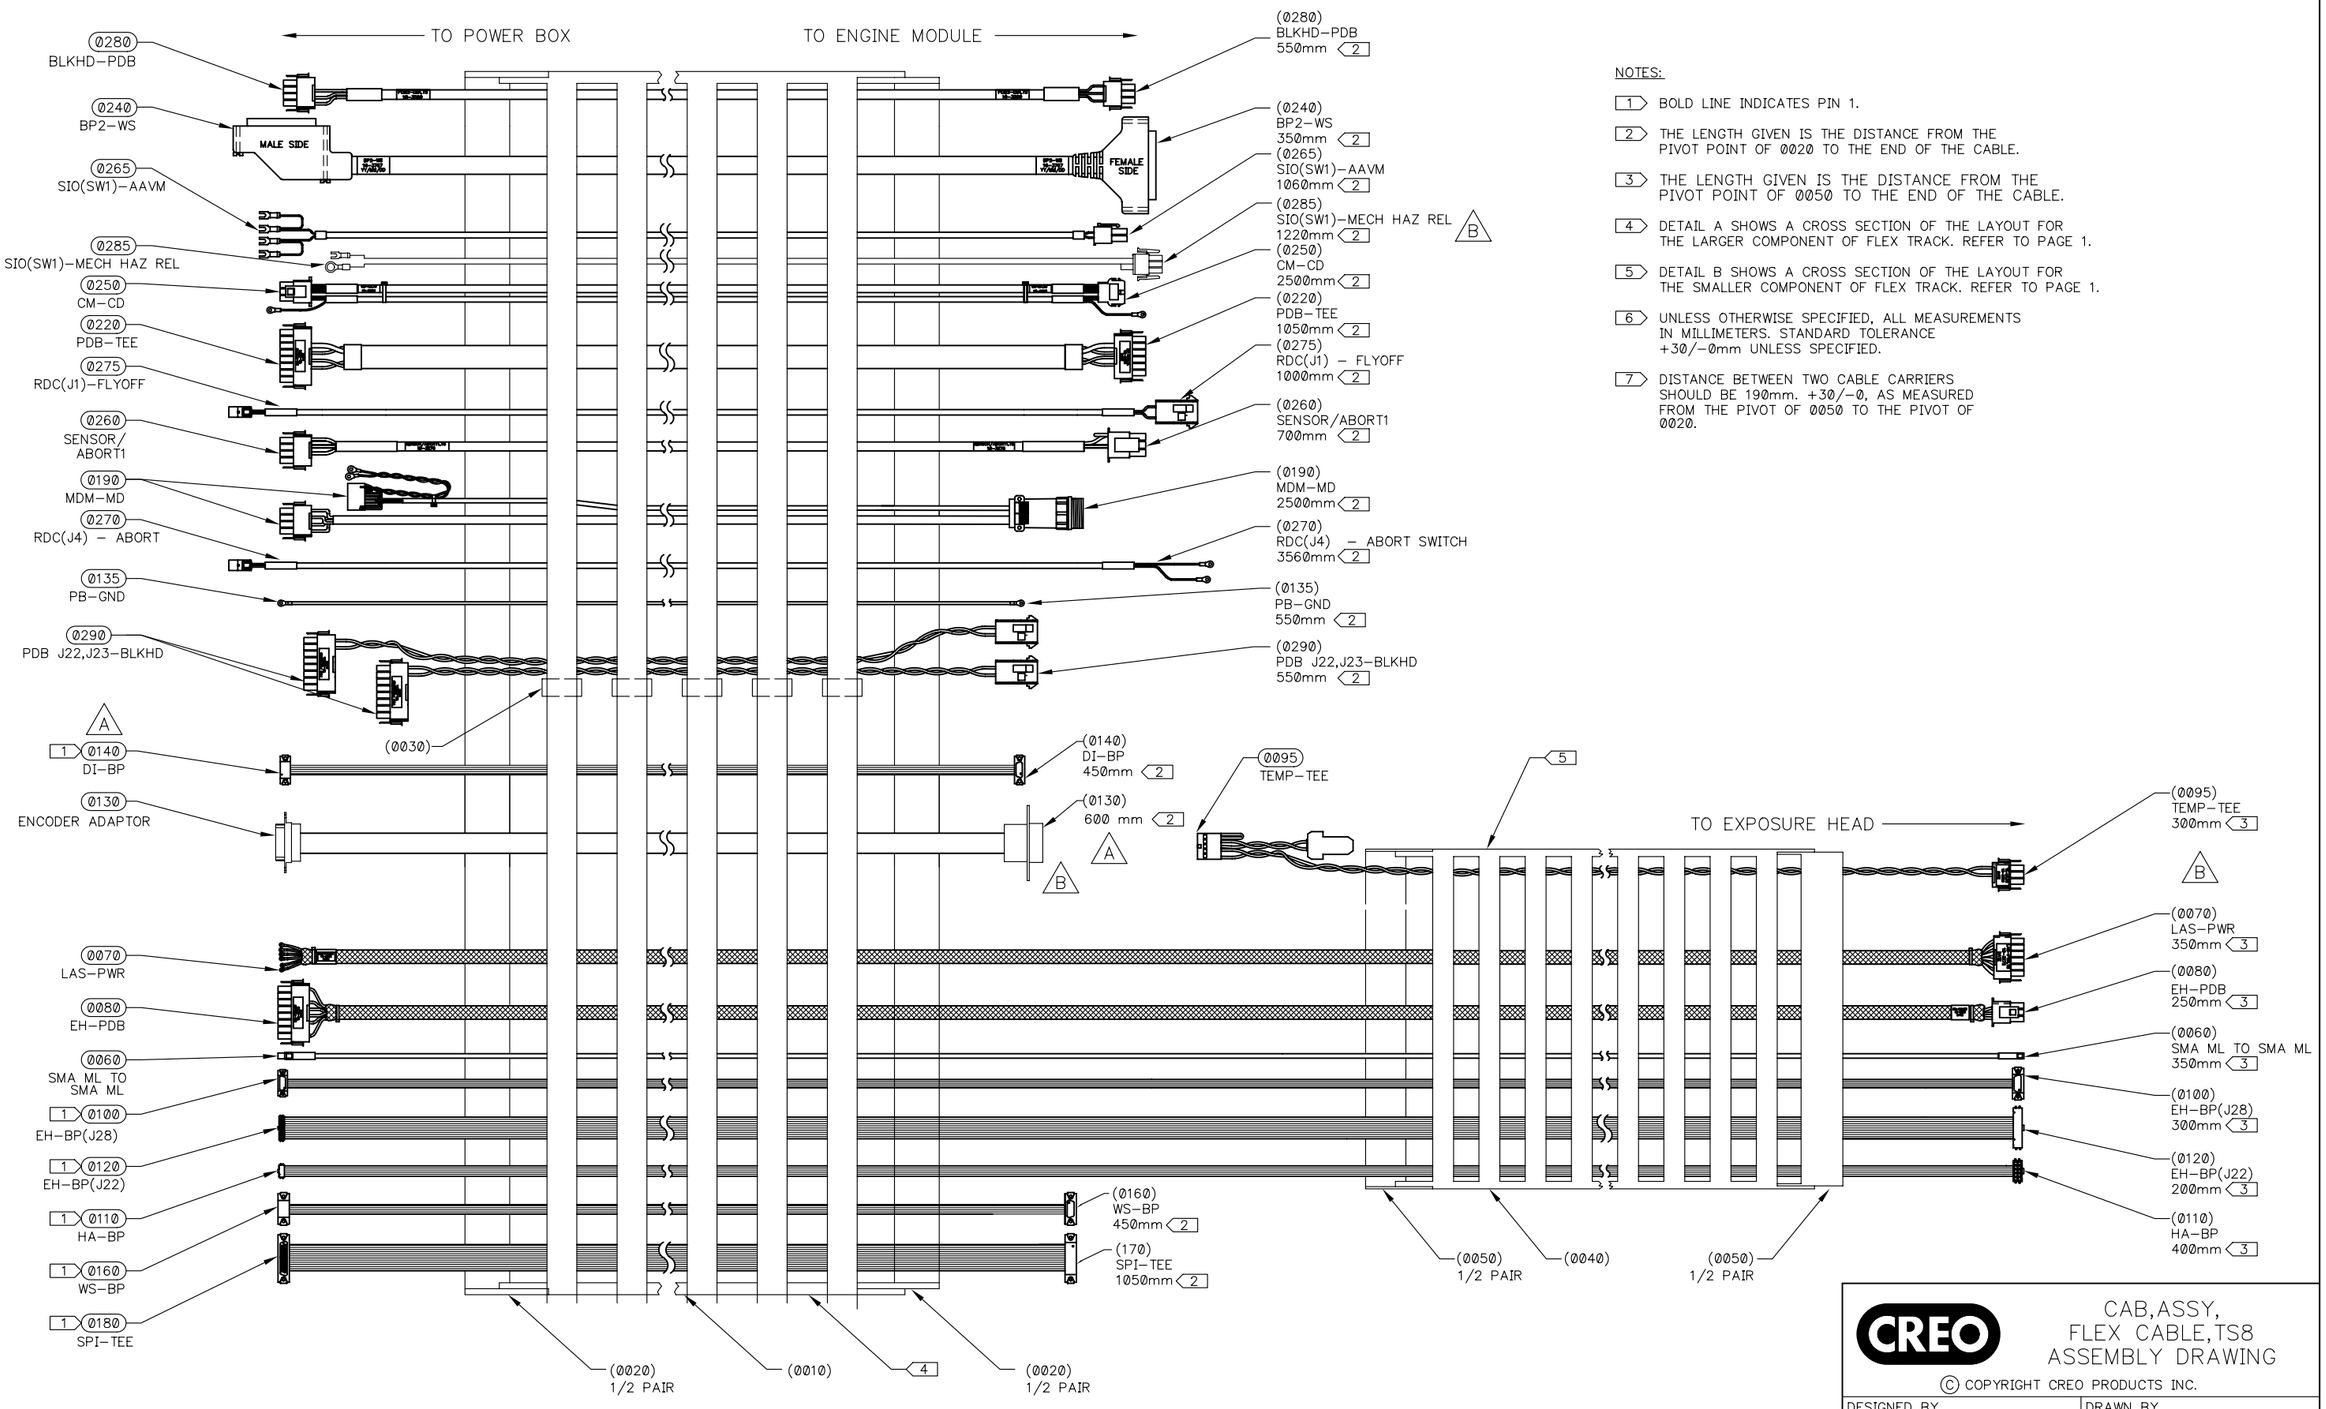


NOTES:

1. BOLD LINE INDICATES PIN 1.
2. THE LENGTH GIVEN IS THE DISTANCE FROM THE PIVOT POINT OF 0020 TO THE END OF THE CABLE.
3. THE LENGTH GIVEN IS THE DISTANCE FROM THE PIVOT POINT OF 0050 TO THE END OF THE CABLE.
4. DETAIL A SHOWS A CROSS SECTION OF THE LAYOUT FOR THE LARGER COMPONENT OF FLEX TRACK. REFER TO PAGE 1.
5. DETAIL B SHOWS A CROSS SECTION OF THE LAYOUT FOR THE SMALLER COMPONENT OF FLEX TRACK. REFER TO PAGE 1.
6. UNLESS OTHERWISE SPECIFIED, ALL MEASUREMENTS IN MILLIMETERS. STANDARD TOLERANCE +30/–0mm UNLESS SPECIFIED.
7. DISTANCE BETWEEN TWO CABLE CARRIERS SHOULD BE 190mm. +30/–0, AS MEASURED FROM THE PIVOT OF 0050 TO THE PIVOT OF 0020.

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
B	D119	1999: AUG: 24	DARCY PRIEST	DARCY PRIEST
A	C969	1999: JUN: 21	S. THOMAS	B. FITZGERALD

B REMOVE ITEMS 0085 AND 0090, CHANGED CABLE ENDS

CREO

CAB,ASSY, FLEX CABLE,TS8 ASSEMBLY DRAWING

© COPYRIGHT CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY			
P. LIU	NICOLE WILSON			
MILLIMETERS UNLESS SPECIFIED	DATE 1996: MAR: 01	SIZE B	SCALE 1: 4	
PART NO. 10–3209C–B	REV AD	DOC 2	SHEET 2	OF