
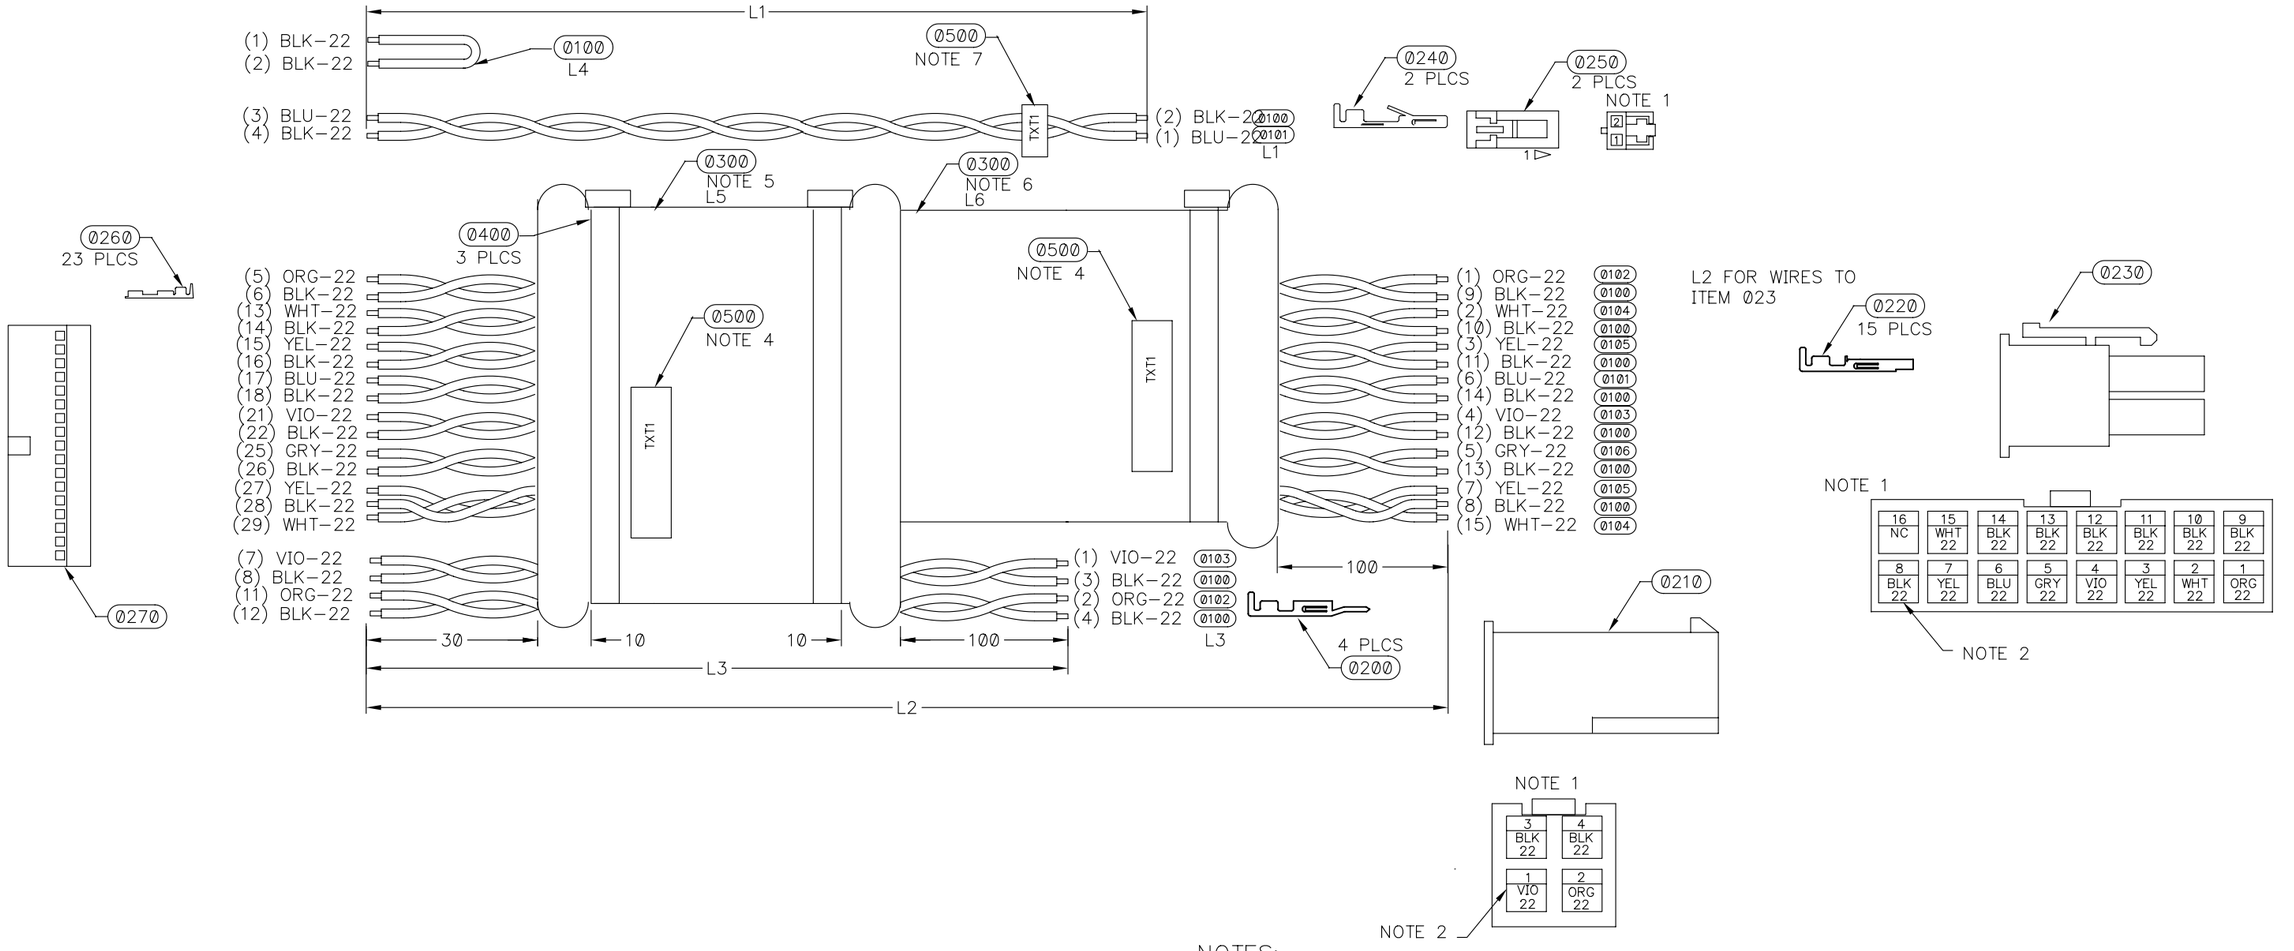


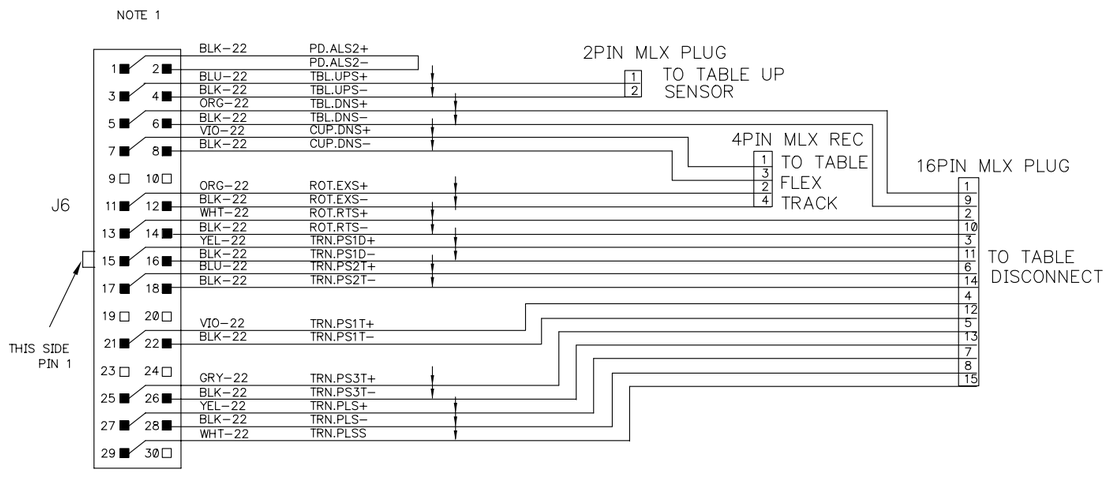

NOTES:

1. CONNECTIONS SHOWN FROM WIRE ENTRY SIDE.
2. 1 / ORG / 22 — PIN # / COLOR / WIRE GAUGE
3. STANDARD TOLERANCE +20/-0 UNLESS SPECIFIED.
4. ATTACH LABEL (ITEM 0500) 50mm FROM TIE WRAP.
5. FOLD SLEEVING 20mm UNDER AND TIE WRAP TO SECURE AROUND HARNESS.
6. SLIDE SECOND PIECE OF SLEEVING UNDER FIRST PIECE 20mm AND TIE WRAP.
7. ATTACH LABEL 30mm FROM CONNECTOR END.
8. EXTEND HEATSHRINK 5mm PAST END OF JACKET.
9. CHANGE FROM REV F TO G IS JUST THE LENGTH OF 0300 HEATSHRINK.

WIRE KEY
1) ITEM 0100 BLK-22
2) ITEM 0101 BLU-22
3) ITEM 0102 ORG-22
4) ITEM 0103 VIO-22
5) ITEM 0104 WHT-22
6) ITEM 0105 YEL-22
7) ITEM 0106 GRY-22

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
G	C238	1998: JUN: 03	R.LEVASSEUR	R.LEVASSEUR
F	C097	1998: JAN: 29	R.LEVASSEUR	R.LEVASSEUR

CREO

CAB,ASSY,SENS-TEE(J6)
TS-A
ASSEMBLY DRAWING

© COPYRIGHT CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY
R.LEVASSEUR	R.LEVASSEUR

MILLIMETERS UNLESS SPECIFIED	DATE	SIZE	SCALE
	1997: SEP: 08	B	1:1

PART NO.	REV	DOC	SHEET	OF
10-3682A-G	AD	1	1	