
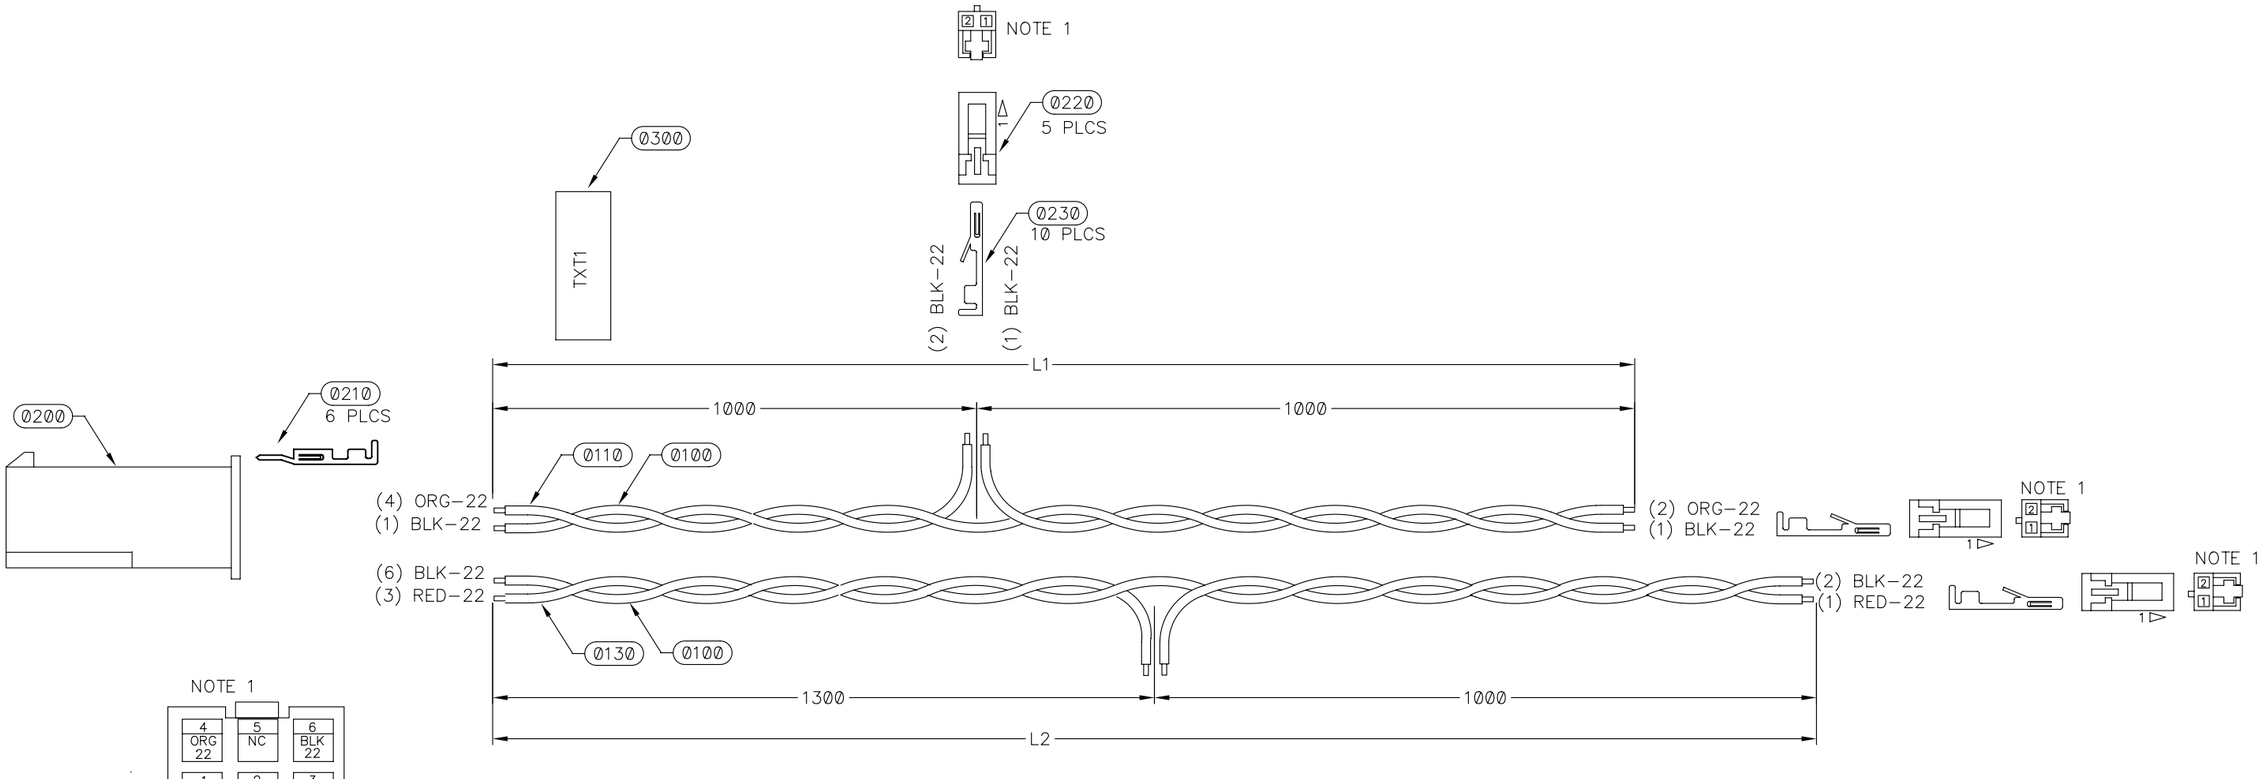


NOTES:

1. CONNECTIONS SHOWN FROM WIRE ENTRY SIDE.
2. 1 / BLK / 22 — PIN # / COLOR / WIRE GAUGE
3. STANDARD TOLERANCE +20/−0 UNLESS SPECIFIED.
4. MAKE UP TWISTED PAIR BLK/ORG AND CUT BLK WIRE AT 1000mm ATTACH PINS AND INSTALL 2 PIN CONNECTOR.
5. ATTACH LABEL 50mm FROM CONNECTOR END.
6. MAKE UP TWISTED PAIR BLK/RED AND CUT BLK WIRE AT 1000mm
7. FOR VER B, REMOVAL OF ORG/GRY WIRES PICKER UP SENSOR

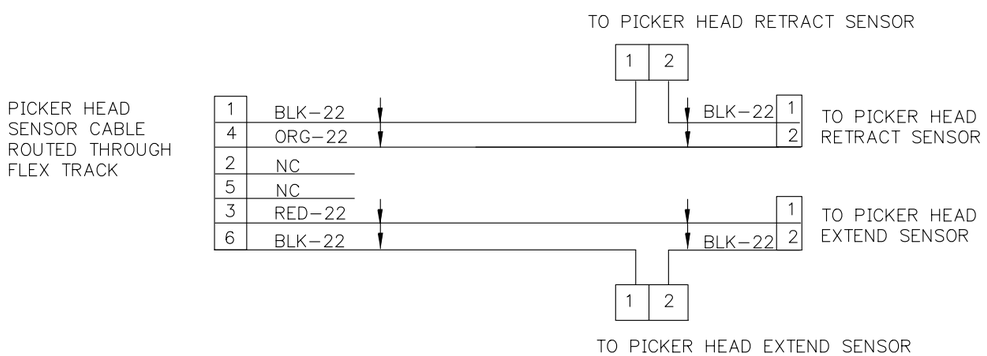

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
A	C097	1998: FEB: 04	R.LEVASSEUR	R.LEVASSEUR

CREO

CAB,ASSY,PH−PHS
TS−A
ASSEMBLY DRAWING

© COPYRIGHT CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY			
R.LEVASSEUR	R.LEVASSEUR			
MILLIMETERS UNLESS SPECIFIED	DATE 1998: FEB: 04	SIZE B	SCALE 1:1	
PART NO. 10−3685B−A	REV AD	DOC 1	SHEET 1	OF