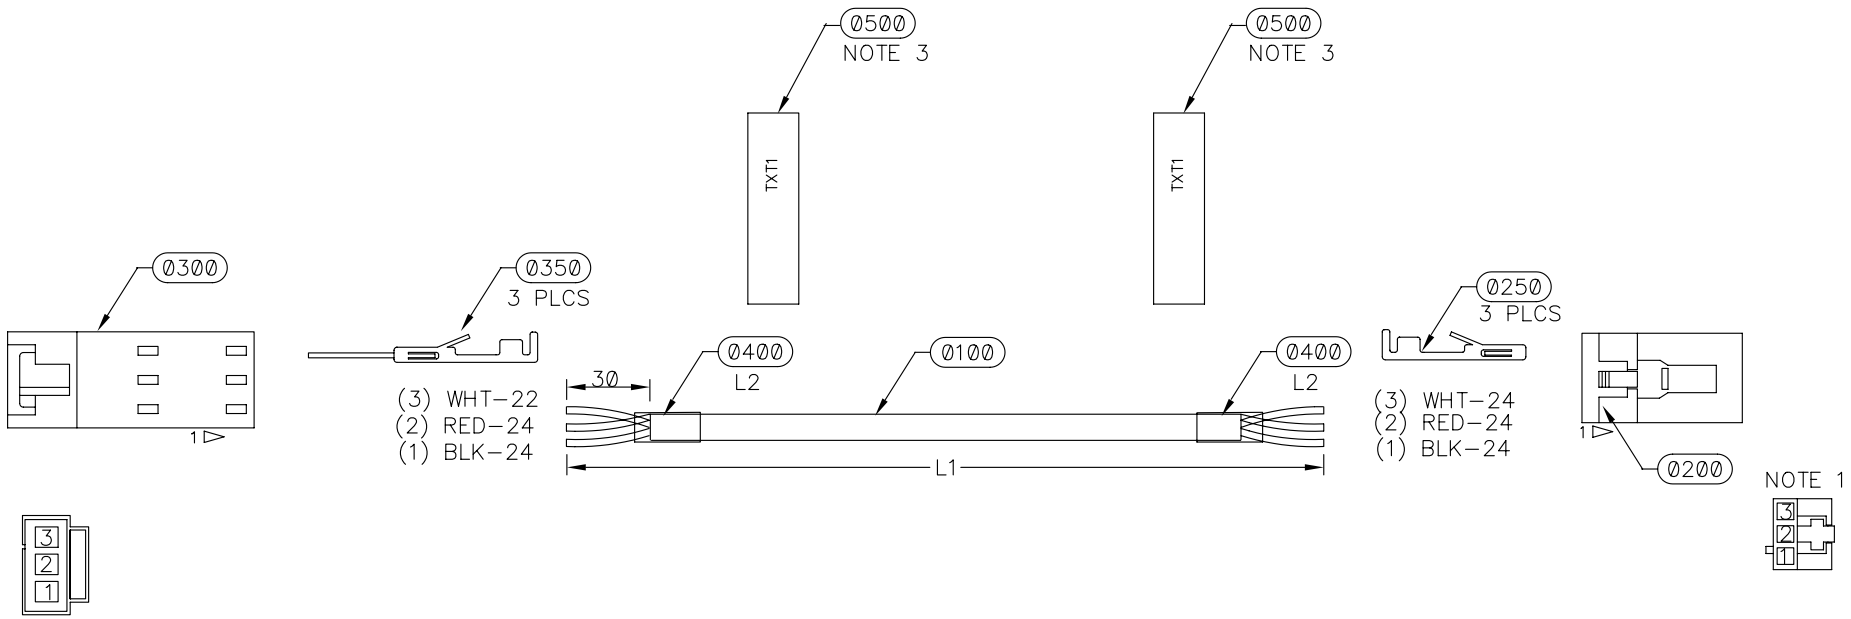


NOTES:

1. CONNECTIONS SHOWN FROM WIRE ENTRY SIDE.
2. STANDARD TOLERANCE +20/-0 UNLESS SPECIFIED.
3. ATTACH LABEL 60mm FROM CONNECTOR END
4. EXTEND HEATSHRINK 5mm PAST END OF CABLE JACKET.
5. STRIP 30mm OF JACKET OFF OF CABLES AT BOTH ENDS.

TO COV LK RELAY			TO TEE BRD CABLE DISCONNECT
3	WHT-24	3	
2	RED-24	2	
1	BLK-24	1	

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
A	C238	1998: JUN: 03	R.LEVASSEUR	R.LEVASSEUR

CREO

CAB,ASSY,COV LK DISC
TS-A
ASSEMBLY DRAWING

© COPYRIGHT CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY			
R.LEVASSEUR	R.LEVASSEUR			
MILLIMETERS UNLESS SPECIFIED	DATE: 1998: APR: 21	SIZE: A	SCALE: 1:1	
PART NO.	REV	DOC	SHEET	OF
10-3794A-A	AD	1	1	