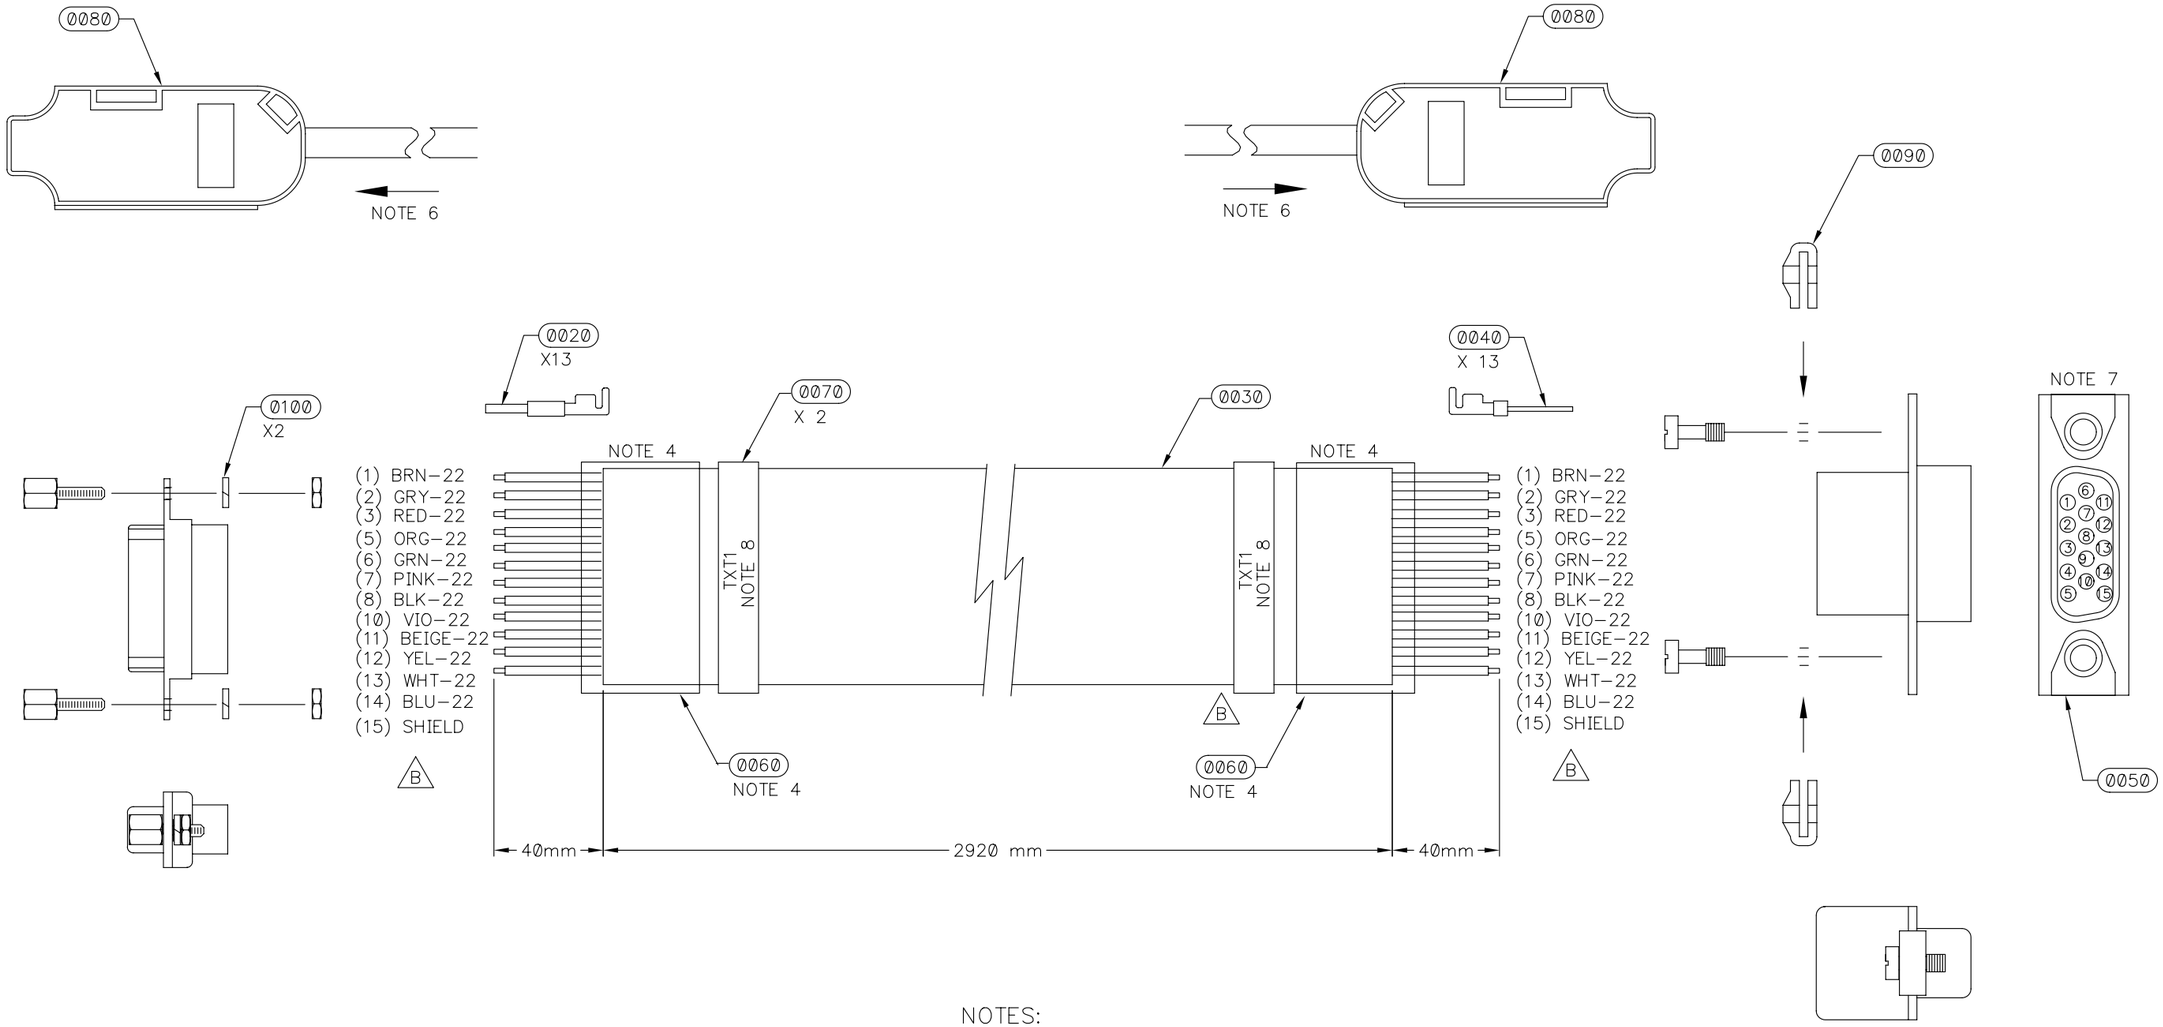


1	BRN-22	TE.A+	1
2	GRY-22	TE.B+	2
3	RED-22	TE.I+	3
4	N/C		4
5	ORG-22	TE.CD+	5
6	GRN-22	TE.A-	6
7	PINK-22	TE.B-	7
8	BLK-22	TE.I-	8
9	N/C		9
10	VIO-22	TE.CD-	10
11	BEIGE-22	GND	11
12	YEL-22	+5V	12
13	WHT-22	GND	13
14	BLU-22	+5V	14
15	SHIELD		15

B

NOTES:

1. CONNECTIONS SHOWN FROM WIRE ENTRY SIDE.
2. 1 / BLU / 22 — PIN # / COLOR / WIRE GAUGE
3. STANDARD TOLERANCE +20/-0 UNLESS SPECIFIED.
4. EXTEND HEATSHRINK 5mm PAST THE CABLE JACKET.
5. ATTACH LABELS 100mm FROM CONNECTOR END.
6. WIRE HARNESS TO BE INSERTED ON BOTH ENDS AS SHOWN.
7. SCREW INTO THREADED SECTION OF CLIP FIRST.
8. TXT1= ENCODER ADAPTER
   10-4065A-[REV]
   DATE

LATEST REV CHANGES INDICATED BY: B

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
B	D042	1999JUL:26	S. THOMAS	S. CHEUNG
A	C969	99:JUNE:27	S. THOMAS	S. CHEUNG

CREO

CAB ASSY, ENCODER ADAPTER, TS8
ASSEMBLY DRAWING

© COPYRIGHT CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY		
	S. THOMAS		
MILLIMETERS UNLESS SPECIFIED	DATE 1999:FEB:12	SIZE B	SCALE N.T.S.

PART NO.	REV	DOC	SHEET	OF
10-4065A-B	AD	1	1	