
SPECIAL NOTES:


ITEM# 0015 IS A 4 CONDUCTOR, NON SHIELDED CABLE WITH UL 20233/1729 300V RATING & APPROVAL
ITEM# 0010 IS A 9 CONDUCTOR, NON SHIELDED CABLE WITH UL 20233/1729 300V RATING & APPROVAL

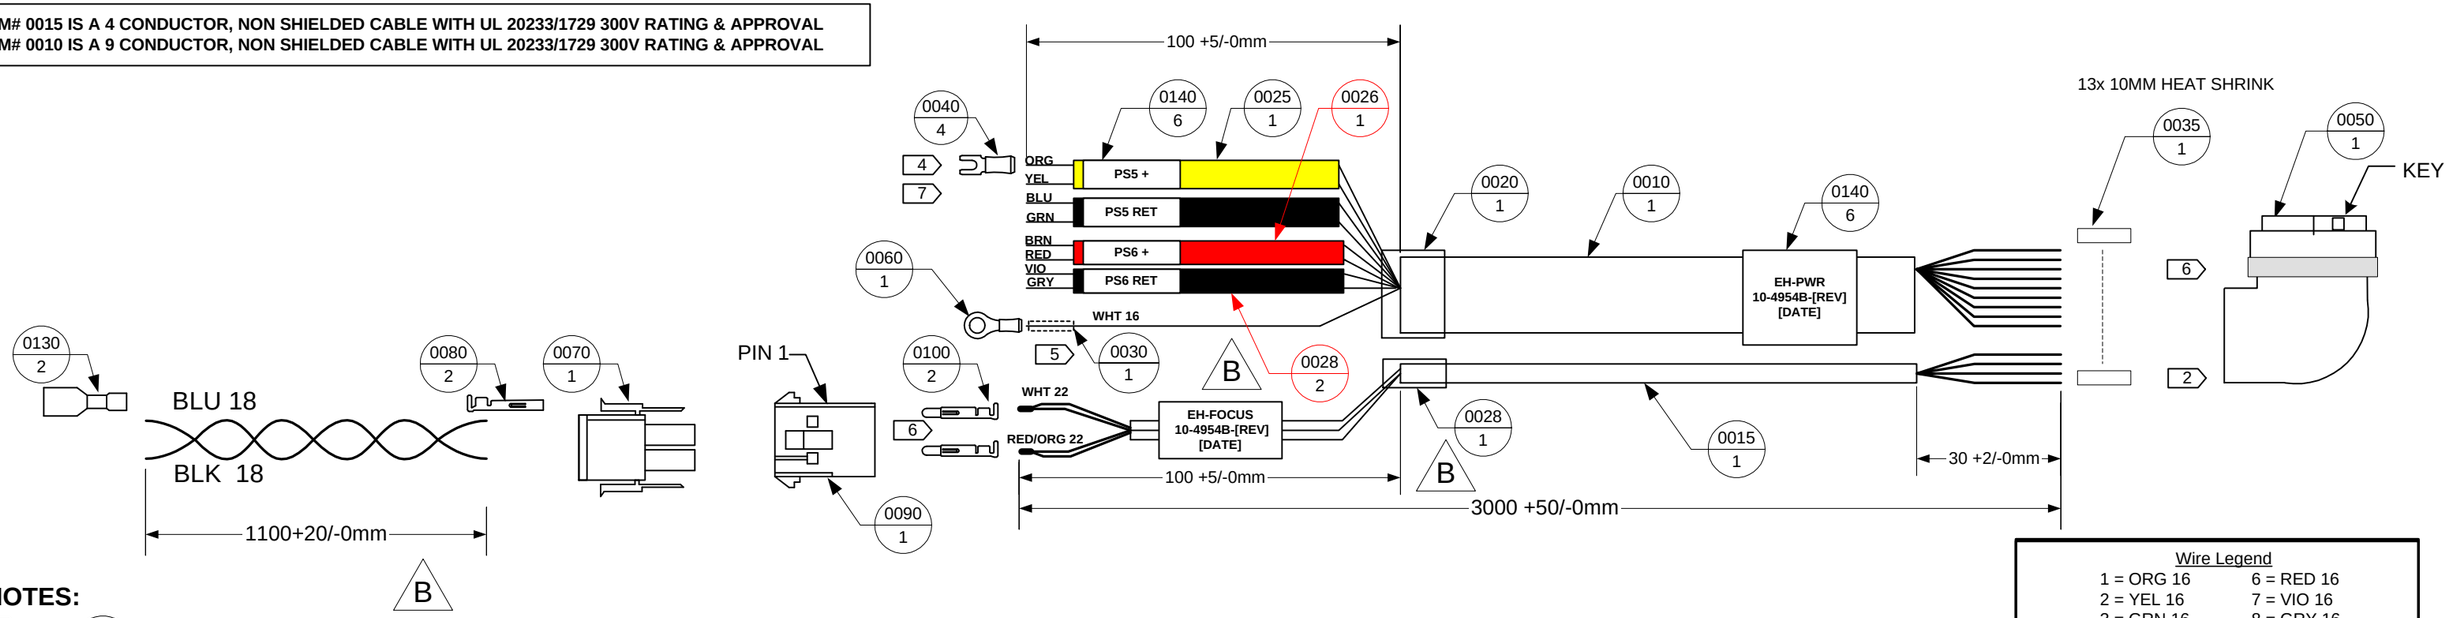

NOTES:

1 — 0010 / 1 — ITEM # / QUANTITY #

2 - STRIPPED AND SOLDERED INTO CONNECTOR.
- CENTER CABLES AND KEEP THEM SIDE BY SIDE TO EACH OTHER.
- FILL THE SHELL WITH POTTING COMPOUND # (LOCTITE: 3173 &3184).
- SPECIAL CARE SHOULD BE TAKEN TO KEEP THE CENTER OF BOTH CABLES AT 135 DEGREES FROM THE KEYDURING DRYING PROCESS.
- THE ASSEMBLING JIG SHOULD BE USED FOR THIS PROCESS.



3 STANDARD TOLERANCE IS SPECIFIED ON THE DRAWING.


4 PUT HEAT SHRINK TUBES (80mm) AT THIS END TO PROVIDE DOUBLE INSULATION.

5 PUT G/Y GND HEAT SHRINK(40mm) ON THE WHITE WIRE AT THIS END.

6 CRIMP TWO 22AWG WIRES INTO ONE PIN(16-3158) -- 2 PLACES.

7 CRIMP TWO 16 AWG WIRES INTO ONE FORK CONNECTOR.


REV	ECO	DATE	DRAWING CHANGES BY	DRAWING CHANGES BY
B	E715	2002:APR:30	S.CHEUNG	S.CHEUNG
A	E342		S. CHEUNG	S. CHEUNG

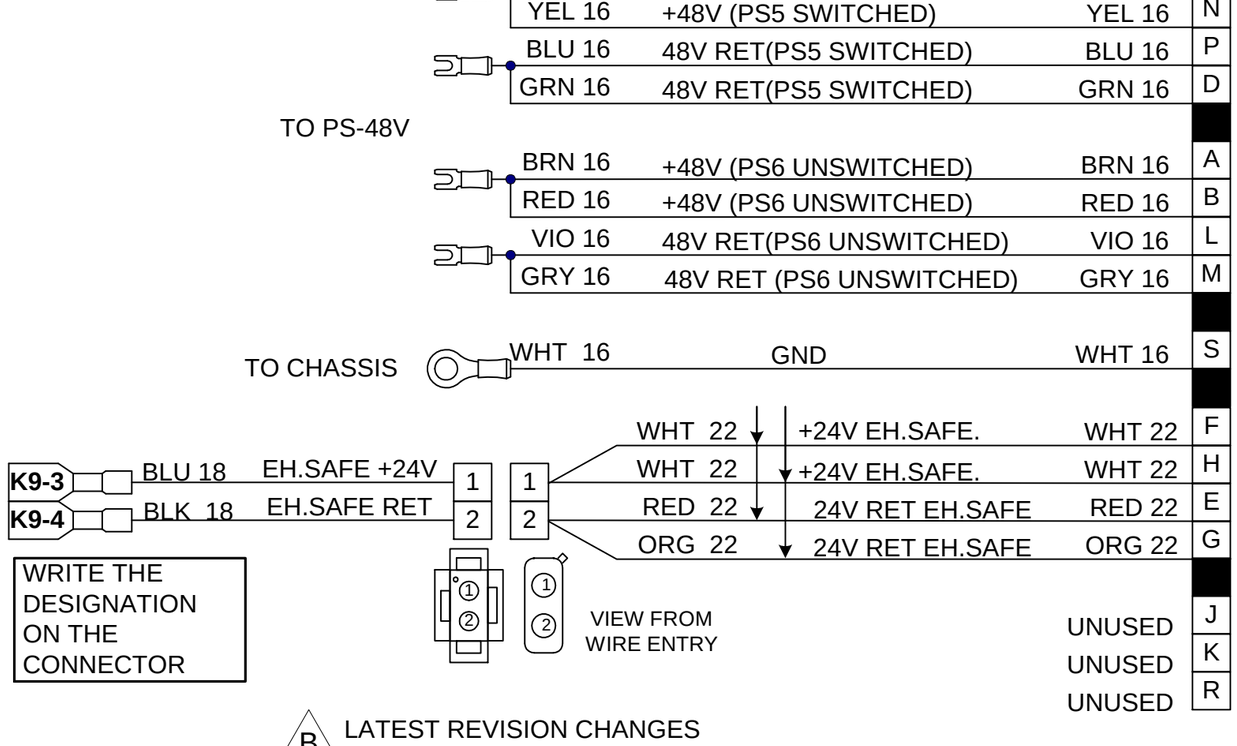


B LATEST REVISION CHANGES

Wire Legend

1 = ORG 16	6 = RED 16
2 = YEL 16	7 = VIO 16
3 = GRN 16	8 = GRY 16
4 = BLU 16	9 = WHT 16
5 = BRN 16	

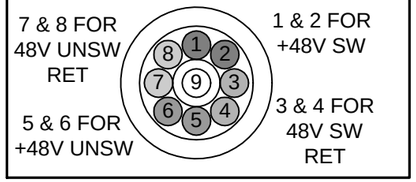

TO EH

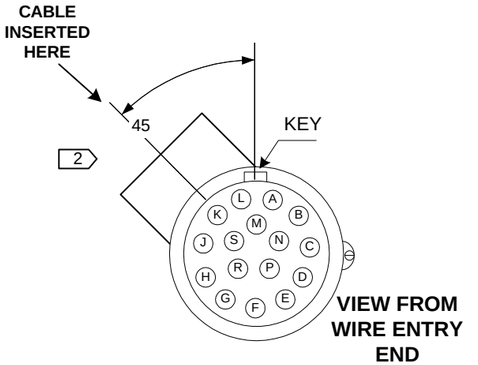

© COPYRIGHT CREO

CAB,ASSY
EH2-PWR,TS
ASSEMBLY DRAWING

DESIGNED BY	DRAWN BY			
S. CHEUNG	S. CHEUNG			
MILLIMETERS UNLESS SPECIFIED	DATE JULY 13, 2001	SIZE B	SCALE NTS	
PART NO.	REV	DOC	SHEET	OF
10 - 4954B - B AD			1	1