

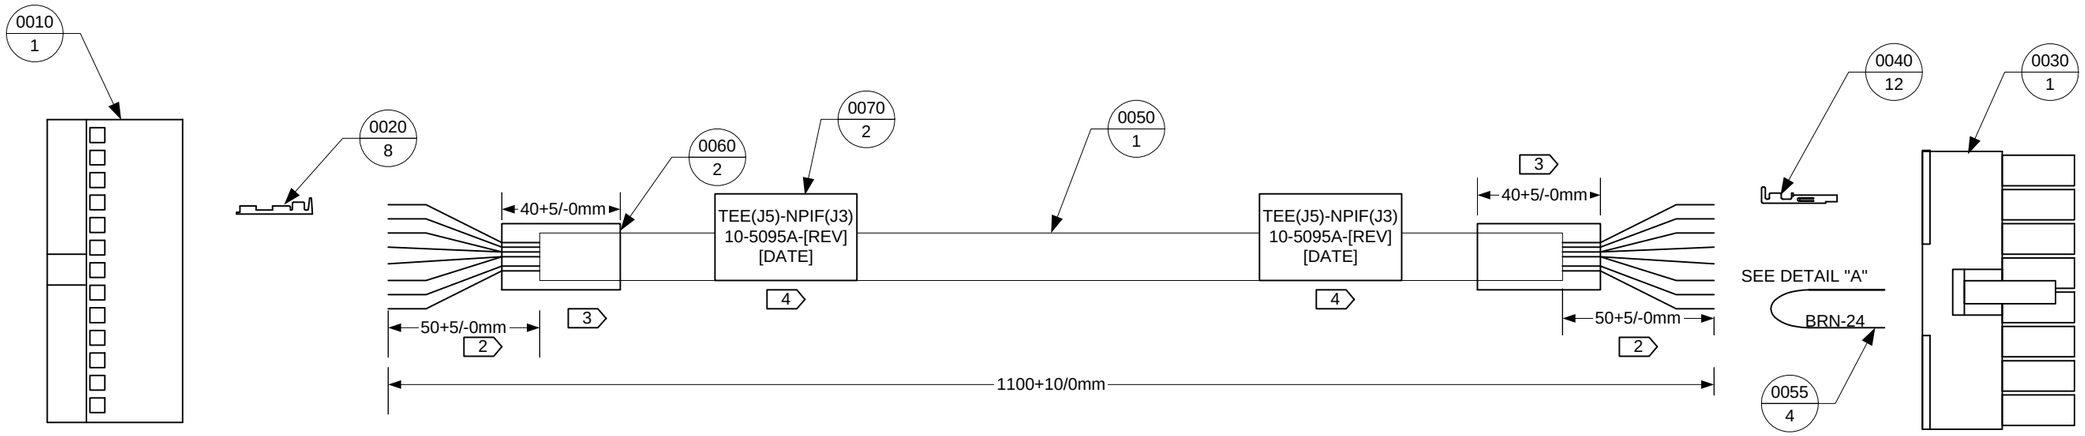


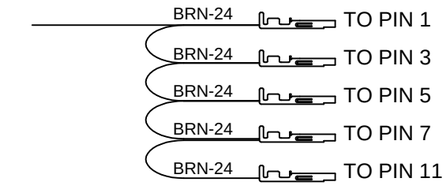


EACH JUMPER WIRE IS 40mm LONG.


PUT 2 WIRES INTO EACH PIN FOR PIN 1,3,5,7

DETAIL "A"

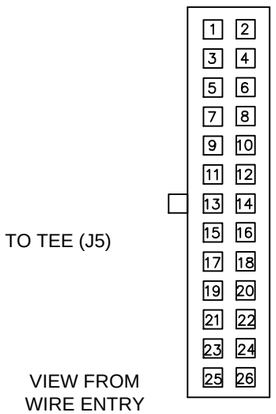

1	WHT-24	PD.PRS1+
3	BRN-24	+5V NF
5	RED-24	NP_PWR ON-
6	BLK-24	GND
7	ORG-24	NP_FAULT-
9	YEL-24	NP_LOADER-
11	GRN-24	NP_PLATE 1-
15	BLU-24	NP_IN PLACE-

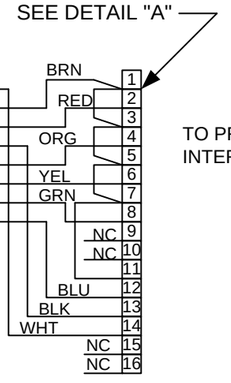

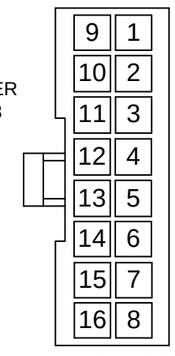

NOTES:

1. 0010 / 1 — ITEM # / QUANTITY #
2. STRIP WIRE JACKET 50mm FROM END
3. ATTACH HEATSHRINK 10mm OVER END OF JACKET
4. LABEL APPLIED TO BOTH ENDS OF CABLE 100mm FROM END

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
A	E862	2002:JUN:06	R.LEVASSEUR	R.LEVASSEUR

© COPYRIGHT CREO INC.

CAB,ASSY,TEE(J5)-NPIF(J3),
TS-A
ASSEMBLY DRAWING

DESIGNED BY	DRAWN BY
R.LEVASSEUR	R.LEVASSEUR

MILLIMETERS UNLESS SPECIFIED	DATE	SIZE	SCALE
	2002:JAN:24	B	NTS

PART NO.	REV	DOC	SHEET	OF
10 - 5095A - A	AD	1	1	