

CONFIDENTIAL: PROPERTY OF CREO PRODUCTS INC..

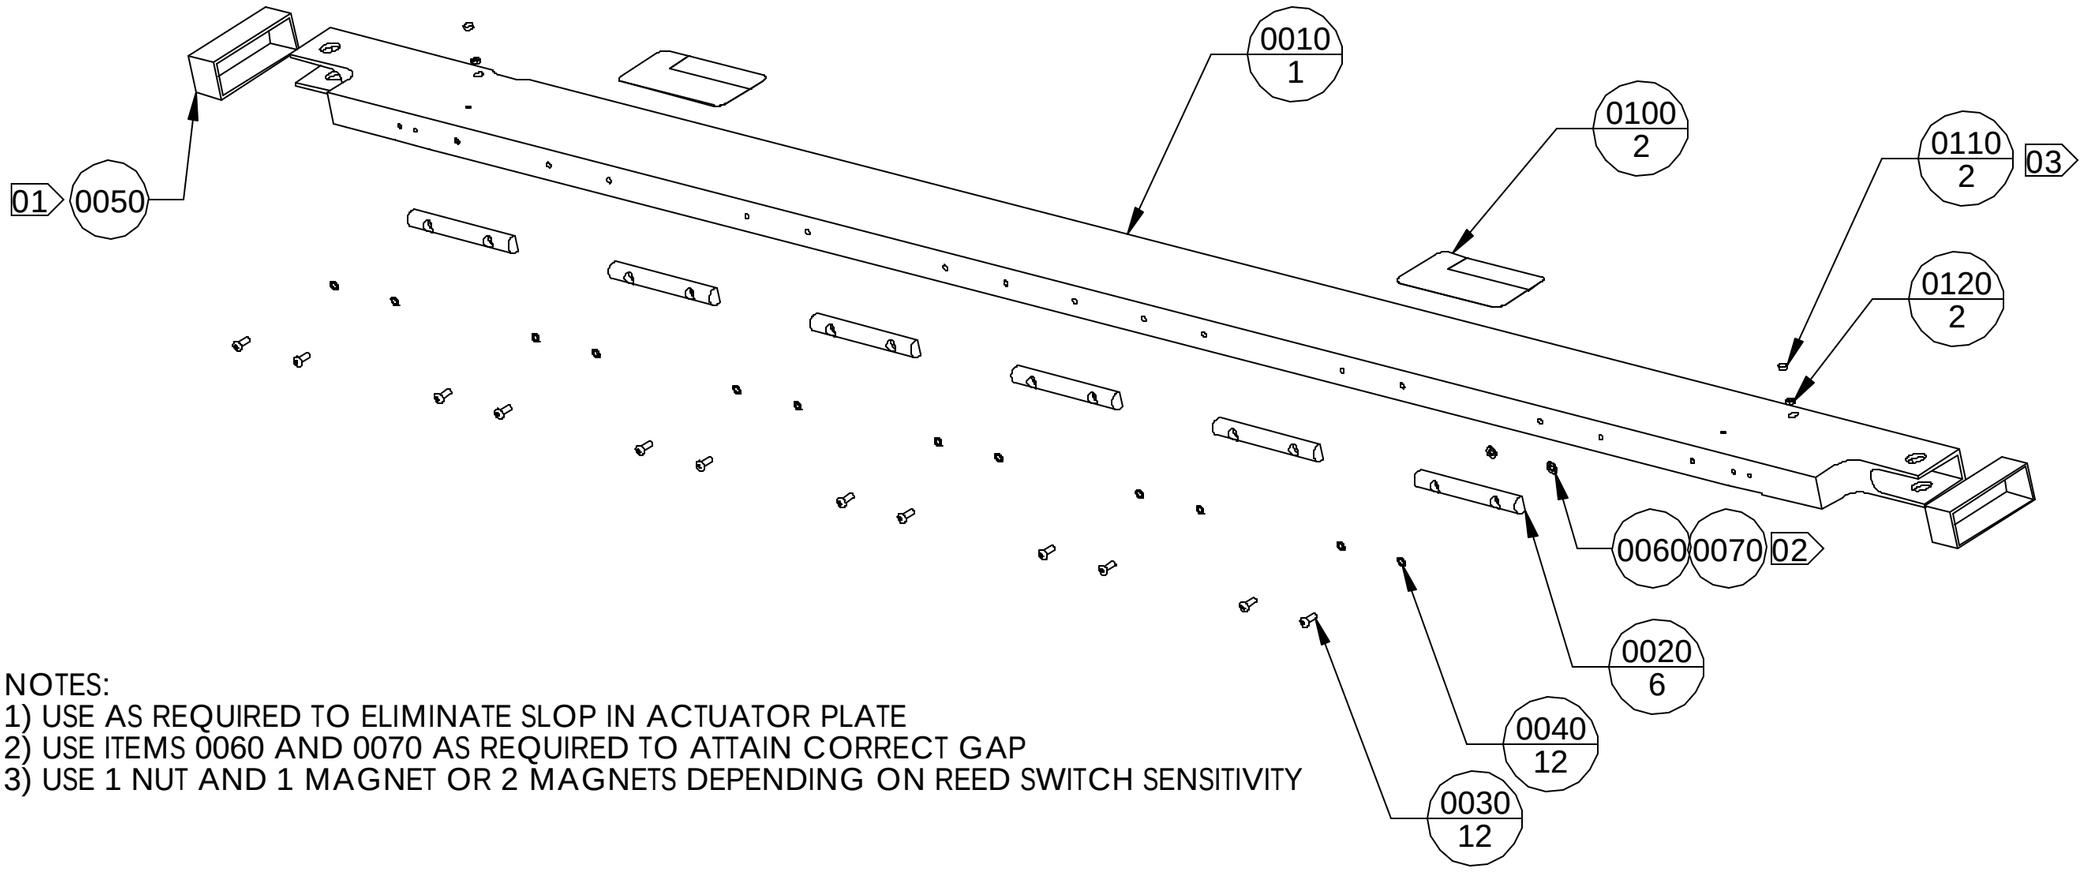

NOTES:
1) USE AS REQUIRED TO ELIMINATE SLOP IN ACTUATOR PLATE
2) USE ITEMS 0060 AND 0070 AS REQUIRED TO ATTAIN CORRECT GAP
3) USE 1 NUT AND 1 MAGNET OR 2 MAGNETS DEPENDING ON REED SWITCH SENSITIVITY

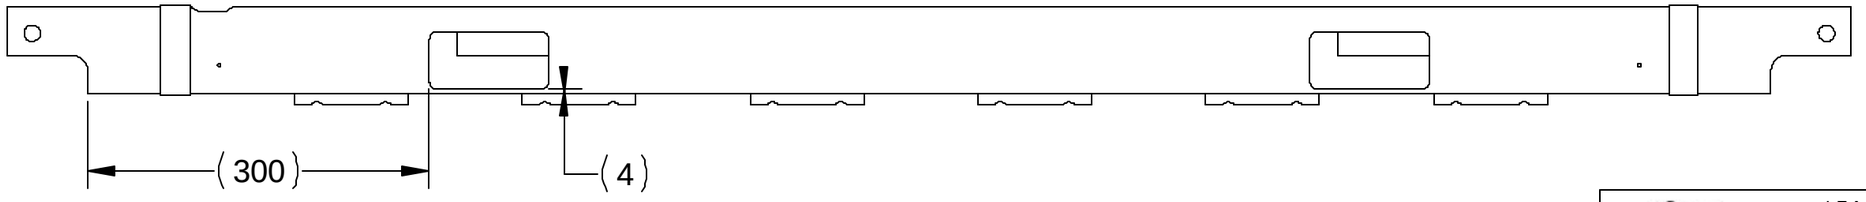

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
D	D172	1999:OCT:15	D PRIEST	D PRIEST
E	E233	2001:JUN:15	D PRIEST	D PRIEST

TOLERANCES UNLESS NOTED

LINEAR	ANGULAR °
X. ± 2	X. ±
X.X ±	X.X ±
X.XX ±	X.XX ±
X.XXX ±	90° ±

CreoScitex

LEADING EDGE
BACKBONE ASSEMBLY
TS

2000 CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY			
D PRIEST	D PRIEST			
MILLIMETERS UNLESS SPECIFIED	DATE: 2001:JUN:15	SIZE B	SCALE 1:4	
PART NO. 50-1087B	REV E	DOC AD	SHEET 1	OF 1