
CONFIDENTIAL: PROPERTY OF CREO PRODUCTS INC.

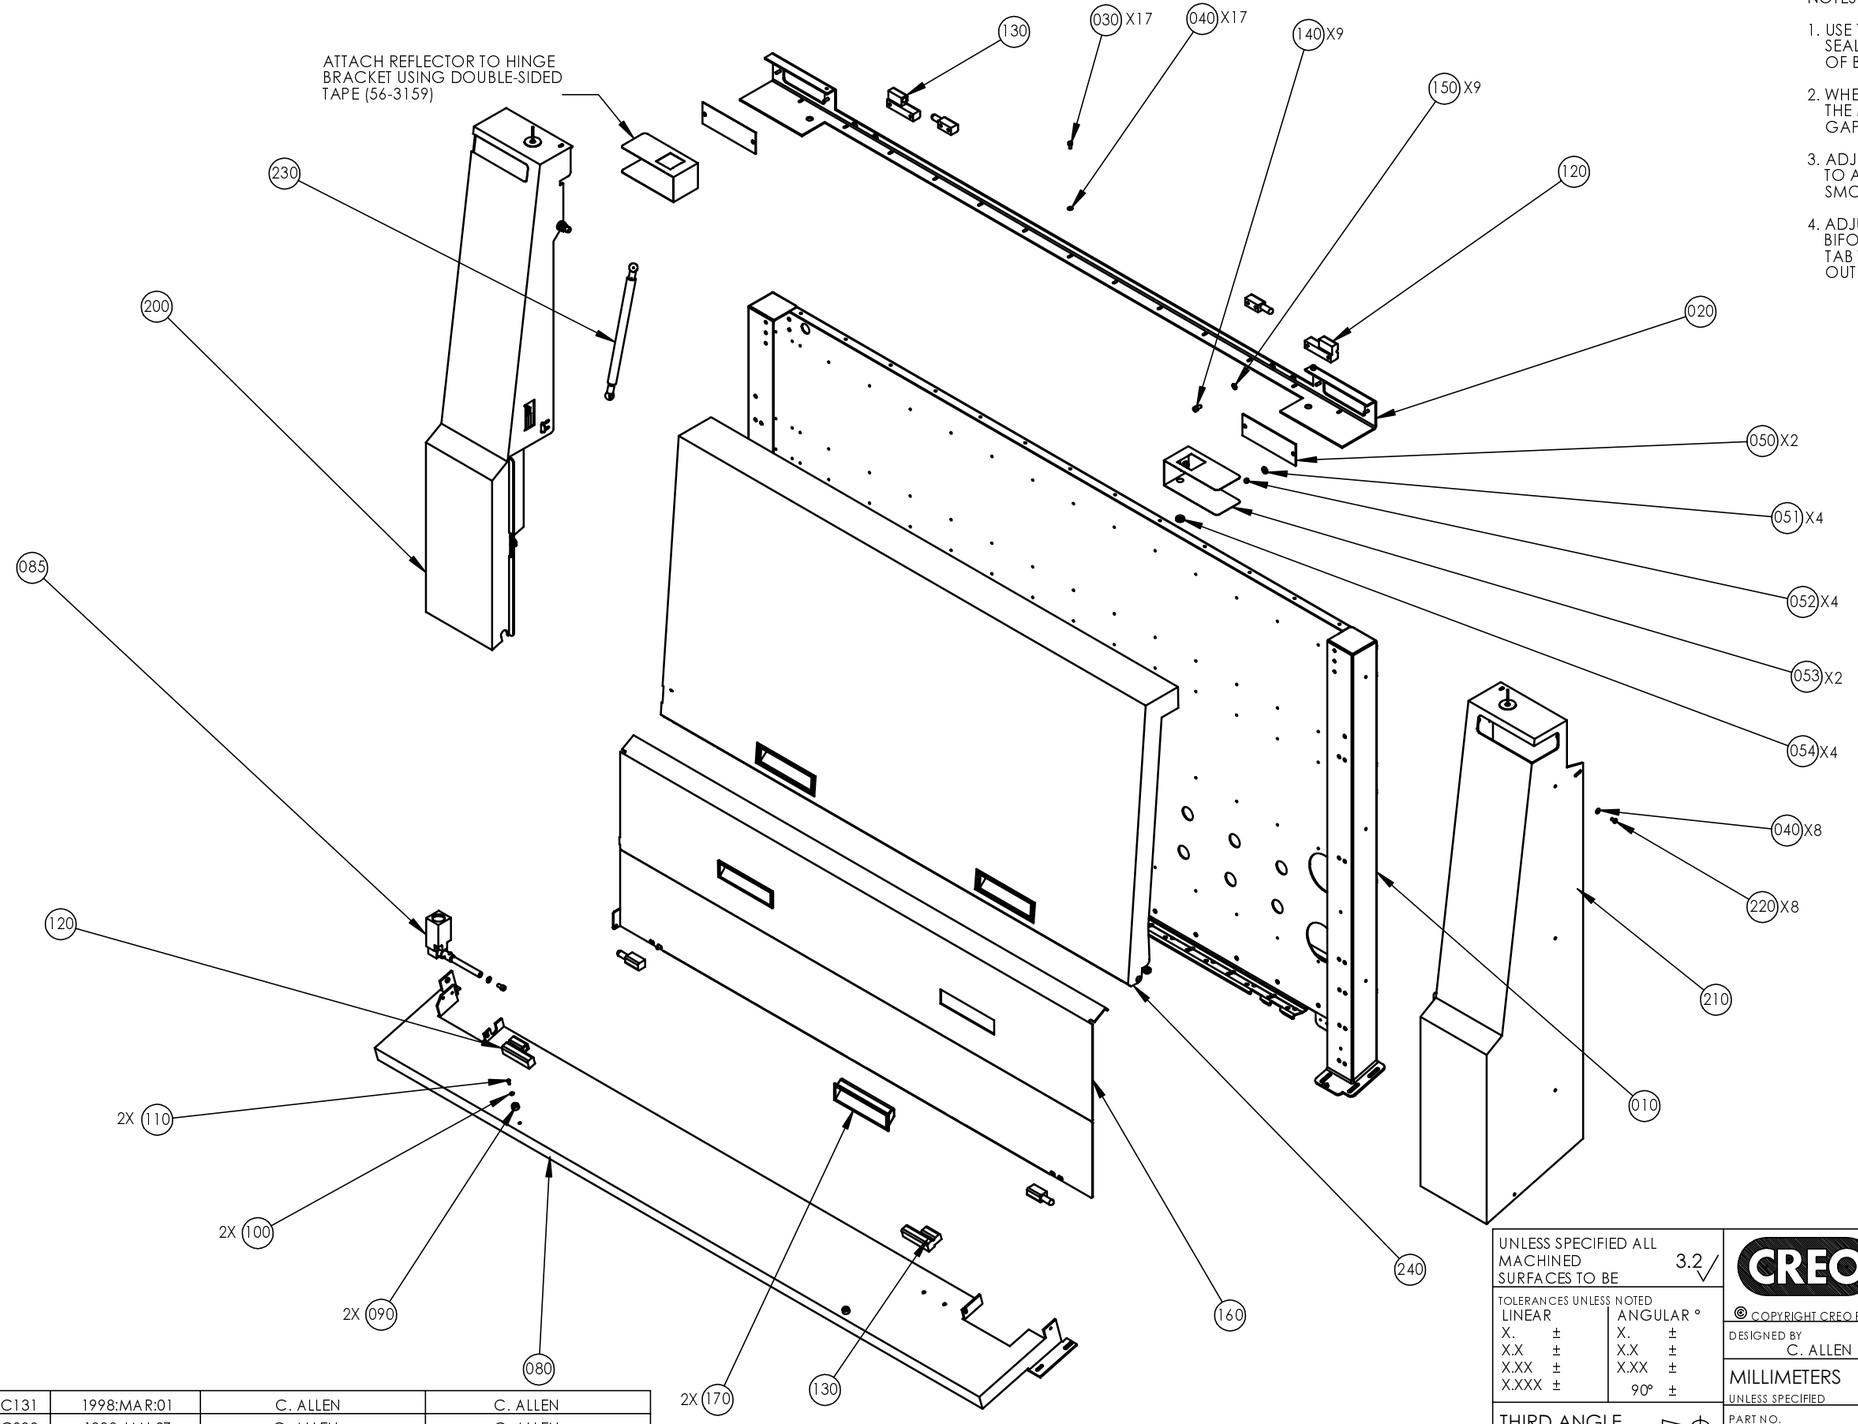

NOTES:

1. USE THE PVC SEAL TAPE (56-3055) TO SEAL THE CORNER LIGHT COMPARTMENT OF BOTH SIDE COVERS.
2. WHEN ATTACHING THE FRONT COVER TO THE MAIN ASSEMBLY, ENSURE AN EQUAL GAP IS LEFT ON EITHER SIDE OF THE DOOR.
3. ADJUST THE FRONT COVER BUMPER GUIDES TO ALLOW THE FRONT COVER TO CLOSE SMOOTHLY WITH STRICT GUIDANCE.
4. ADJUST THE POSITION OF THE OPERATOR BIFOLD DOOR TO ALLOW THE INTERLOCK TAB TO MOVE FREELY IN THE FLANGE CUT-OUT.

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
B	C131	1998:MAR:01	C. ALLEN	C. ALLEN
A	C090	1998:JAN:27	C. ALLEN	C. ALLEN

INTERPRET GD&T PER ANSI Y14.5M - 1994

FINISH

MATERIAL

UNLESS SPECIFIED ALL MACHINED SURFACES TO BE 3.2

TOLERANCES UNLESS NOTED

LINEAR		ANGULAR °	
X.	±	X.	±
X.X	±	X.X	±
X.XX	±	X.XX	±
X.XXX	±	90°	±

THIRD ANGLE PROJECTION

CREO

ASSY, MECH, LOAD TABLE & SKINS, JV-GREY, TS-A ASSEMBLY DRAWING

© COPYRIGHT CREO PRODUCTS INC.

DESIGNED BY: C. ALLEN

DRAWN BY: C. ALLEN

MILLIMETERS UNLESS SPECIFIED

DATE: 1998:JAN:27

SIZE: B

SCALE: 1:10

PART NO.: 50-1525A — B

REV	DOC	SHEET	OF
AD		1	1