
CONFIDENTIAL: PROPERTY OF CREO PRODUCTS INC.

NOTES:

1. WHEN ATTACHING THE FRONT COVER TO THE MAIN ASSEMBLY, ENSURE AN EQUAL GAP IS LEFT ON EITHER SIDE OF THE DOOR.
2. ADJUST THE POSITION OF THE OPERATOR DOOR TO REST FLUSH ON THE SIDE COVER FLANGES.

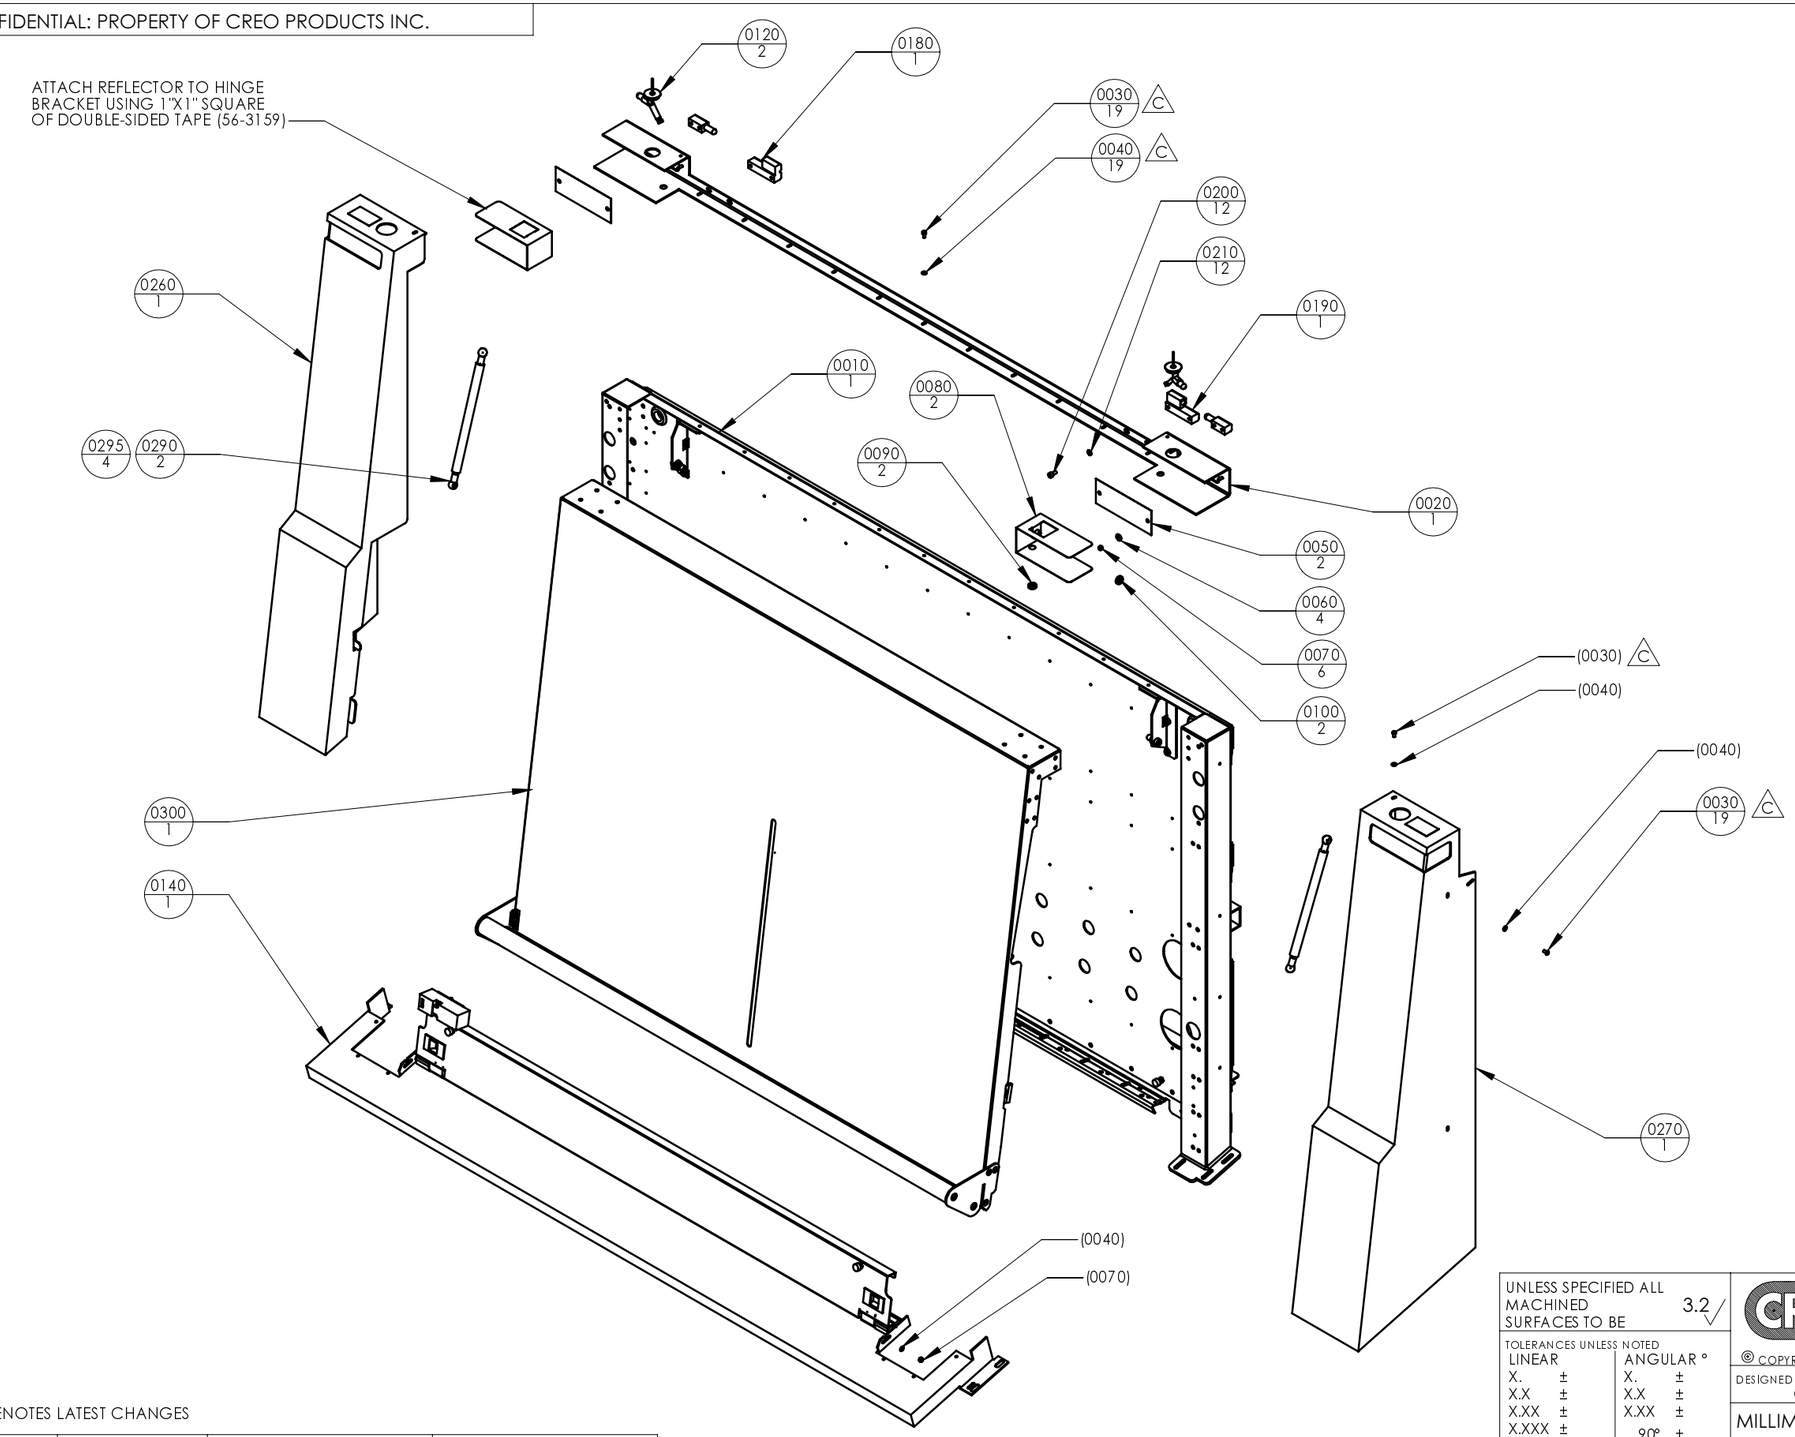

C DENOTES LATEST CHANGES

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
C	C494	1998:OCT:23	R BOUCHAL	R BOUCHAL
B	C319	1998:JUN:01	C. ALLEN	C. ALLEN

INTERPRET GD&T PER ANSI Y14.5M - 1994

FINISH

MATERIAL

UNLESS SPECIFIED ALL MACHINED SURFACES TO BE 3.2

TOLERANCES UNLESS NOTED

LINEAR	ANGULAR °
X. ±	X. ±
X.X ±	X.X ±
X.XX ±	X.XX ±
X.XXX ±	90° ±

THIRD ANGLE PROJECTION

CREO

ASSY, MECH, LOAD TABLE & SKINS, JV-GREY, TS-A ASSEMBLY DRAWING

© COPYRIGHT CREO PRODUCTS INC.

DESIGNED BY C. ALLEN

DRAWN BY C. ALLEN

MILLIMETERS UNLESS SPECIFIED

DATE 1998:JAN:27

SIZE B

SCALE 1:10

PART NO. 50-1525B

REV	DOC	SHEET	OF
C	AD	1	1