

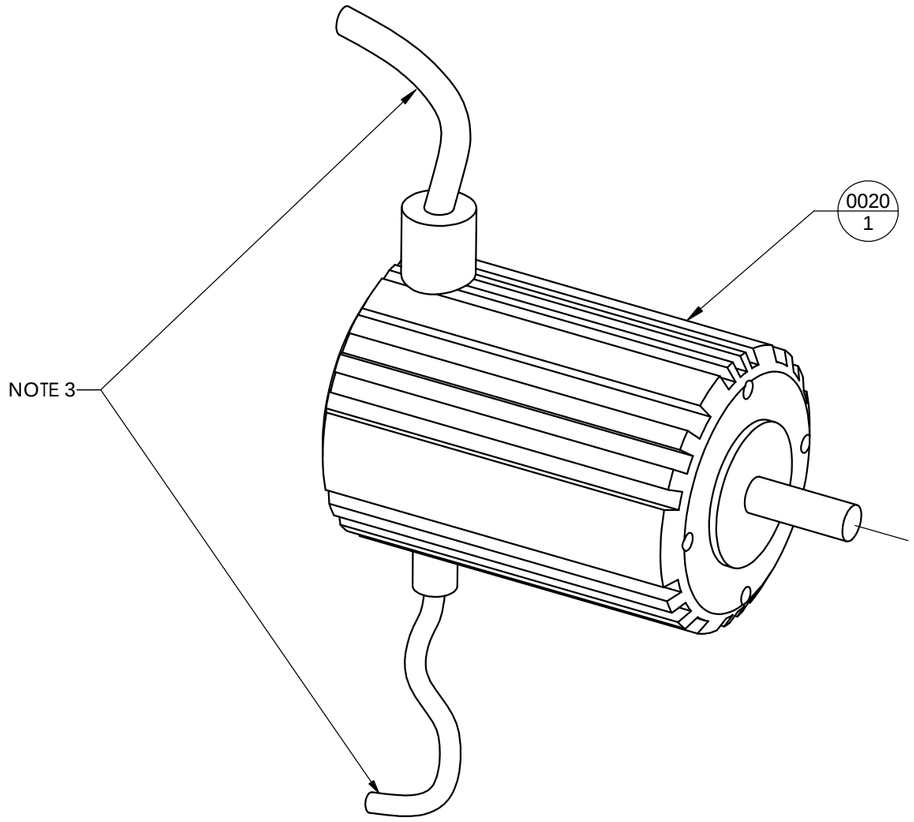


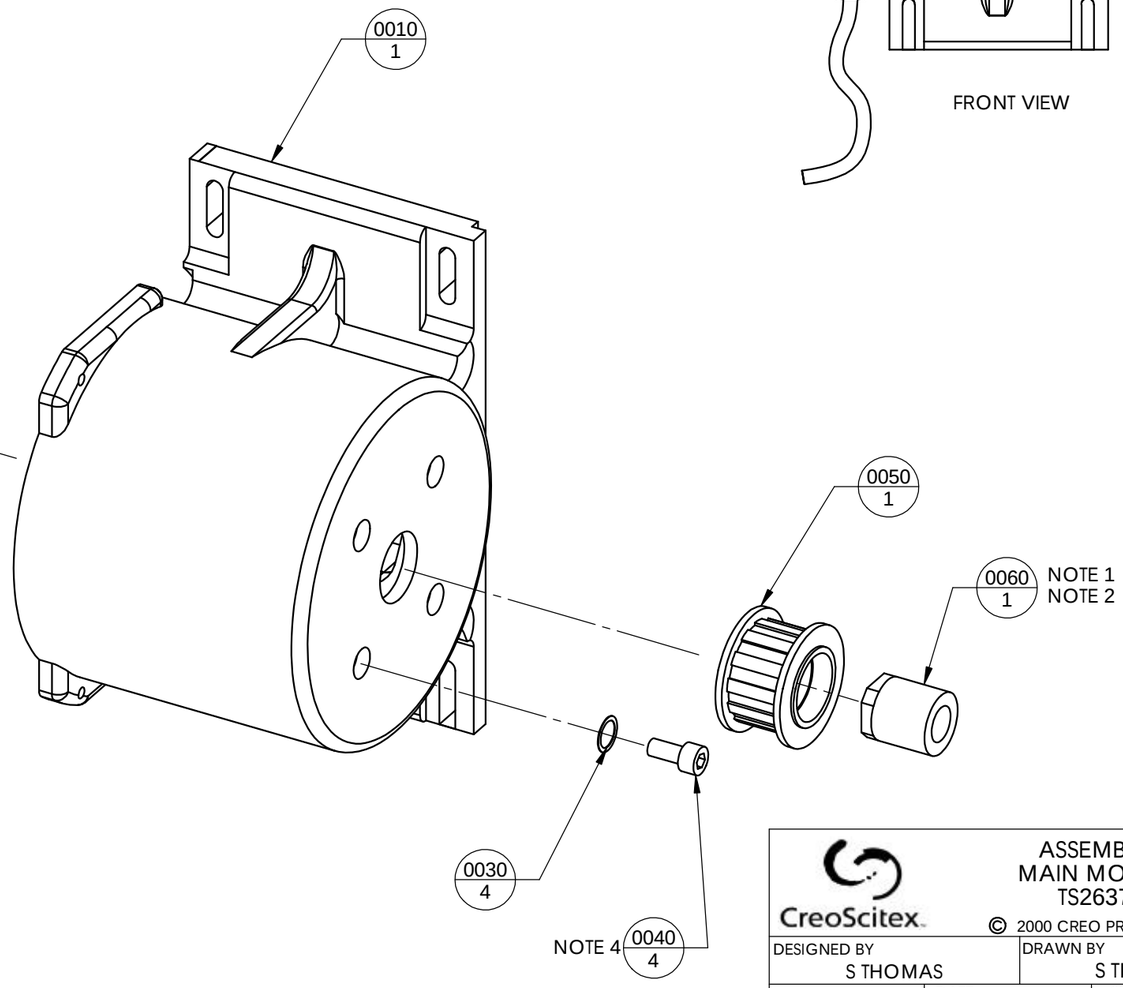

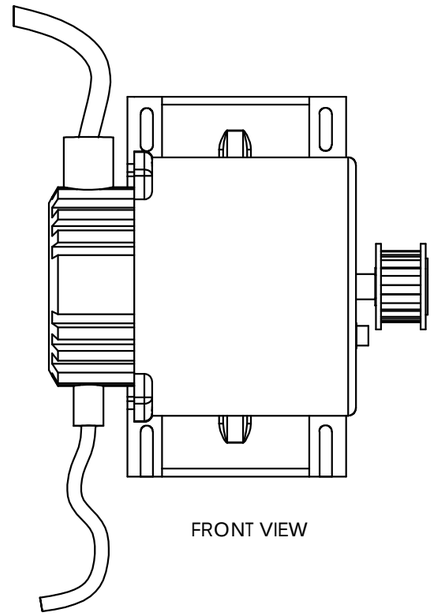

NOTES:

1. PUSH INTO PULLEY UNTIL IT BOTTOMS OUT, IF NEED BE ROTATE THE BUSHING LOCKNUT (0060). TORQUE TO 19.8 Nm
2. CHECK THE PACKAGE FOR ADDITIONAL DETAILED INSTRUCTIONS.
3. BLACK CABLE MUST BE FACING DOWN AND REARWARD. COLOURED CABLE MUST FACING UP AND REARWARD
4. USE LOCTITE 222 ON THESE SCREWS.

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
<R>	<E>	<D>	<B>	<A>
A	D774	2000:OCT:06	S THOMAS	S THOMAS

CreoScitex

ASSEMBLY
MAIN MOTOR
TS2637

© 2000 CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY		
S THOMAS	S THOMAS		
MILLIMETERS UNLESS SPECIFIED	DATE: 2000:OCT:06	SIZE B	SCALE 1:2

PART NO.	REV	DOC	SHEET	OF
50-2160A -	A	AD	1	1