
| REV | ECO | DATE | DRAWING CHANGES BY | APPROVED BY |
|---|---|---|---|---|
| D | D864 | 2000:SEP:25 | D PRIEST | D PRIEST |
| C | D470 | 2000:MAY:18 | D PRIEST | D PRIEST |


CONFIDENTIAL: PROPERTY OF CREO PRODUCTS INC.

SCHEDULE:

| ITEM | GAUGE | QTY |
|---|---|---|
| 01 | 8 | 6 |
| 02 | 6 | 1 |
| 03 | 6 | 1 |
| 04 | 6 | 1 |
| 05** | 6 | 2 |
| 06 | 6 | 1 |

** ITEM 5 IS ONE LEFT AND ONE RIGHT HANDED PART

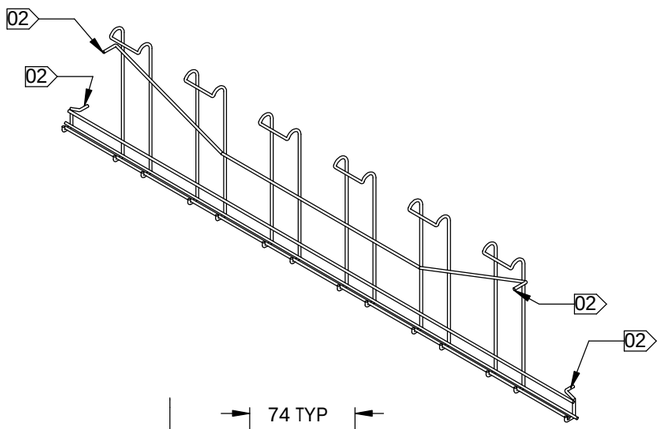

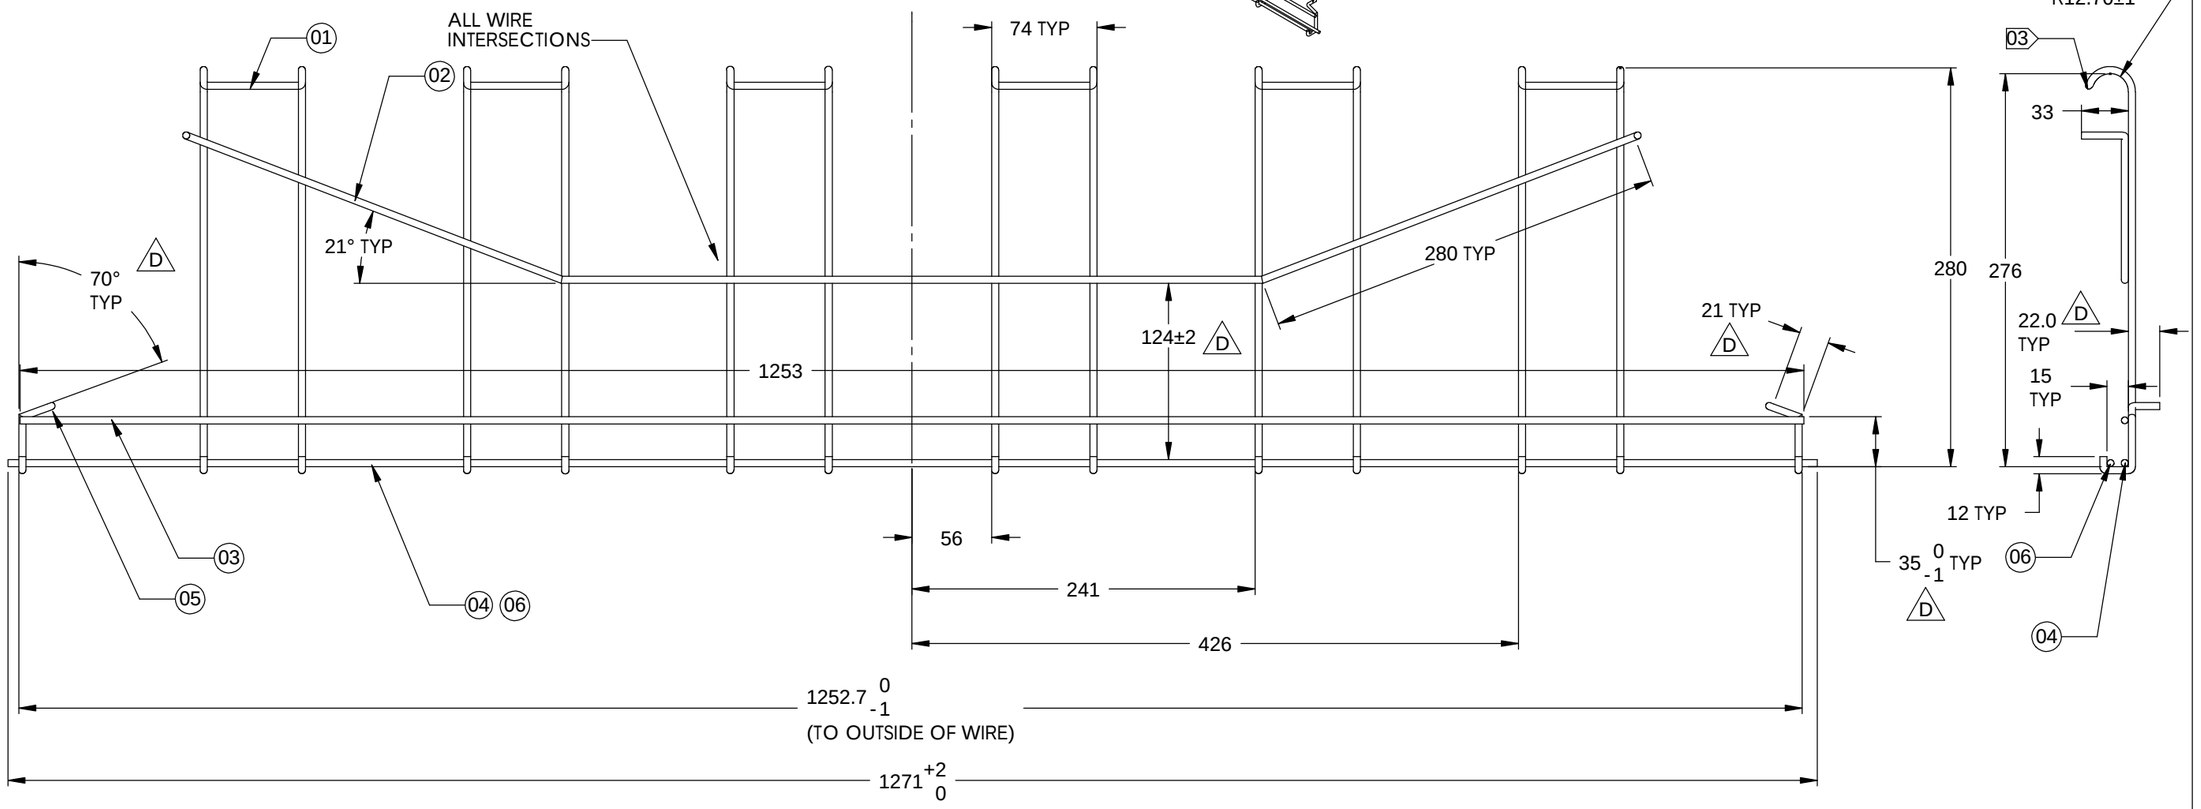
NOTES:

1. ENSURE ALL WIRE ENDS HAVE NO SHARP BURRS.
2. INSTALL TAPERED FERRULES, 4 PLCS
3. FLATTENING AT END OF CURVE ALLOWABLE. CENTRELINE OF WIRE AT END OF CURVE NOT TO GO BELOW CENTRE OF 12.7 mm RADIUS.

INTERPRET GD&T PER ANSI Y14.5M - 1994

FINISH
BLACK SEMI-GLOSS POWER COAT

DEBURR 0.25 MM MAX

MATERIAL
STEEL WIRE, GAUGE AS NOTED

UNLESS SPECIFIED ALL MACHINED SURFACES TO BE 3.2

TOLERANCES UNLESS NOTED

| LINEAR | | ANGULAR ° | |
|---|---|---|---|
| X. | ±1.0 | X. | ±1 |
| X.X | ±0.5 | X.X | ± |
| X.XX | ± | X.XX | ± |
| X.XXX | ± | 90° | ±1 |

THIRD ANGLE PROJECTION

CREO

FAB, RACK, WIRE LOAD RAMP TS 3244

© COPYRIGHT CREO PRODUCTS INC.

| DESIGNED BY | DRAWN BY |
|---|---|
| JEFFREY CHAN | JEFFREY CHAN |

| MILLIMETERS UNLESS SPECIFIED | DATE: | SIZE | SCALE |
|---|---|---|---|
| | 1999:MAR:23 | B | 1:4 |

| PART NO. | REV | DOC | SHEET | OF |
|---|---|---|---|---|
| 57-6062A | D | DD | 1 | 1 |