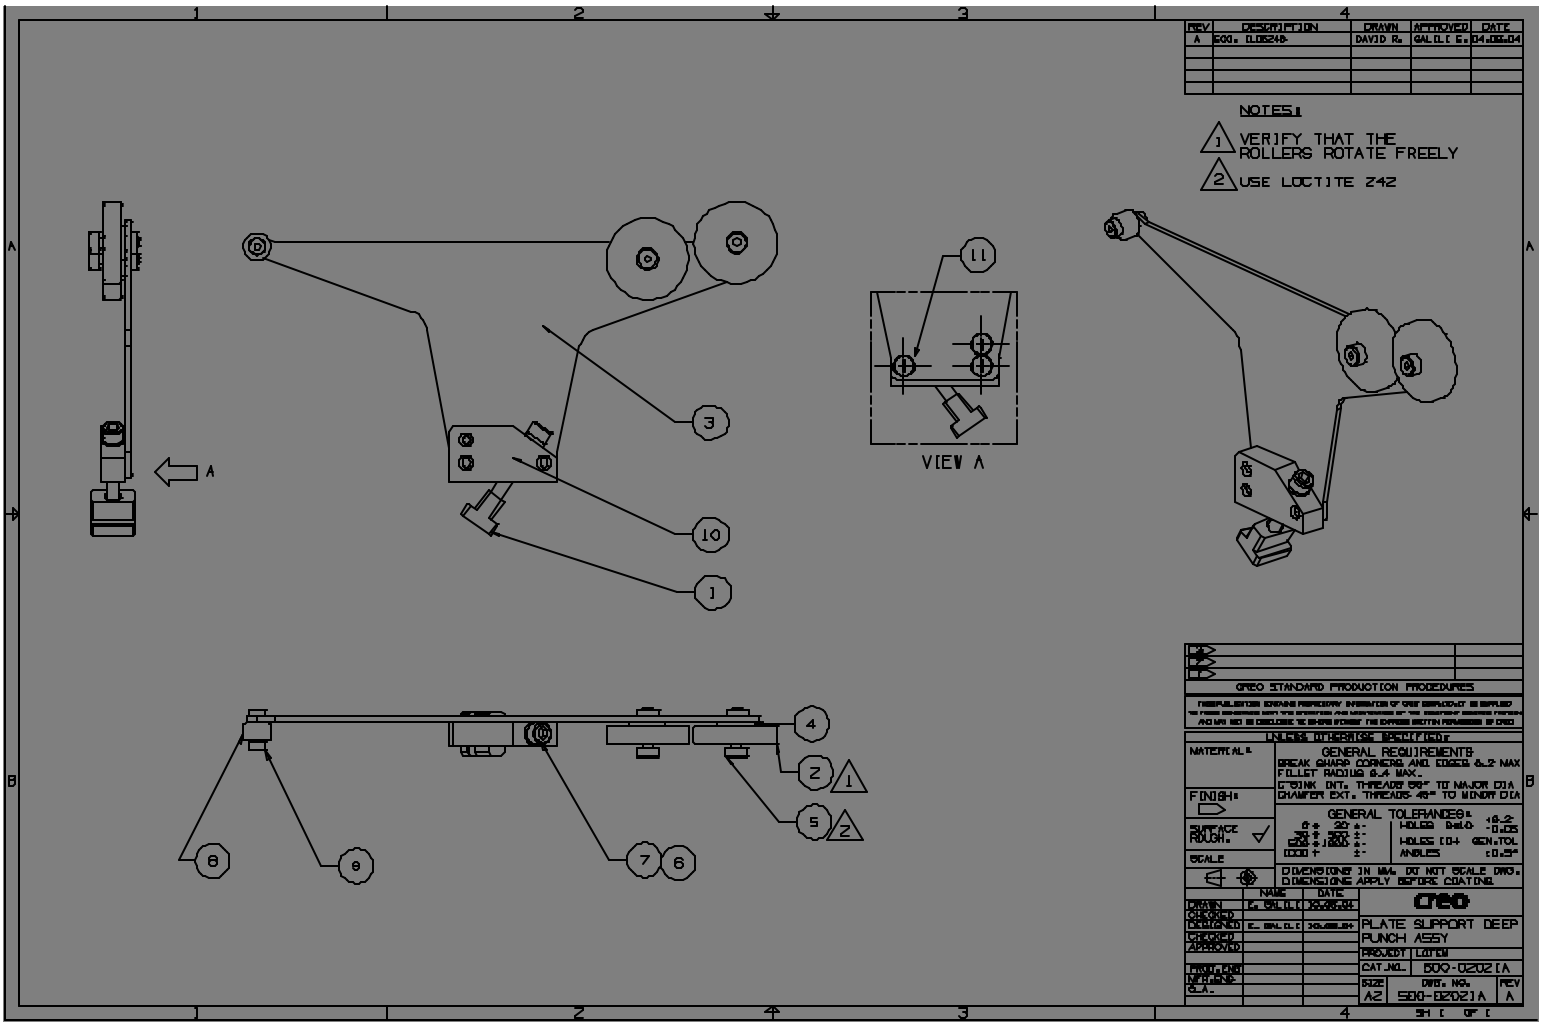

REV
DESCRIPTION
DRAWN
APPROVED
DATE
A
500- 0205248-
DAVID R.
GALOI C.
04-DEC-04
NOTES:
1 VERIFY THAT THE ROLLERS ROTATE FREELY
2 USE LOCTITE 242
VIEW A
A
11
3
10
1
4
2
1
5
2
8
9
7
6
CREO STANDARD PRODUCTION PROCEDURES
UNLESS OTHERWISE SPECIFIED:
MATERIAL:
GENERAL REQUIREMENTS:
BREAK SHARP CORNERS AND EDGES 6.2 MAX
FILLET RADIUS 6.4 MAX.
COUNTERSINK INT. THREADS 82° TO MAJOR DIA
CHAMFER EXT. THREADS 45° TO MINOR DIA
FINISH:
SURFACE ROUGH.
SCALE
GENERAL TOLERANCES:
HOLES DIA
HOLES DIA
ANGLES
DIMENSIONS IN MM. DO NOT SCALE DRG.
DIMENSIONS APPLY BEFORE COATING.
NAME
DATE
DRAWN
CHECKED
DESIGNED
CHECKED
APPROVED
MFG APPR
MATERIAL
Q.A.
creo
PLATE SUPPORT DEEP PUNCH ASSY
PROJECT
LOTUS
CAT.NO.
500-0202 [A
SIZE
A2
DWG. NO.
500-0202 A
REV
A
SH 1 OF 1