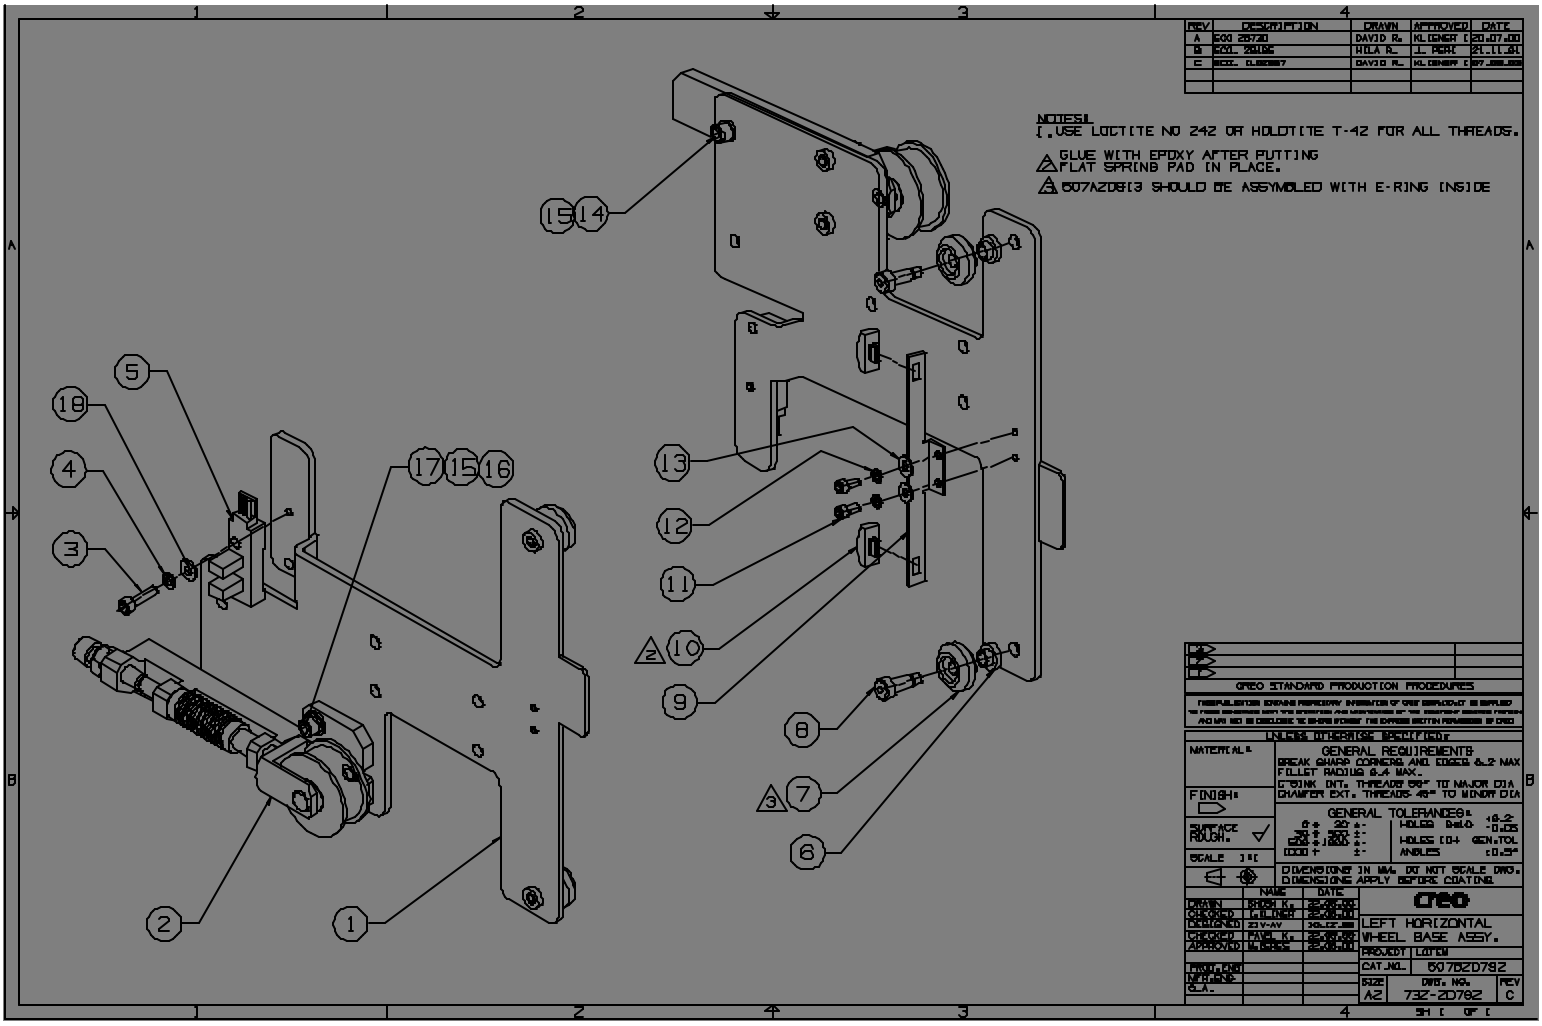

NOTES:
1. USE LOCTITE NO 242 OR HOLDTITE T-42 FOR ALL THREADS.
GLUE WITH EPOXY AFTER PUTTING FLAT SPRING PAD IN PLACE.
507AZ08[3 SHOULD BE ASSYMBLED WITH E-RING INSIDE
REV DESCRIPTION DRAWN APPROVED DATE
A 500 25720 DAVID R. KLEINER [20.07.00
B ECO. 26106 HILA R. J. PEAT 21.11.01
C ECO. 26887 DAVID R. KLEINER [07.08.02
GREO STANDARD PRODUCTION PROCEDURES
UNLESS OTHERWISE SPECIFIED:
MATERIAL:
GENERAL REQUIREMENTS:
BREAK SHARP CORNERS AND EDGES 0.2 MAX
FILLET RADIUS 0.4 MAX.
COUNTERSINK INT. THREADS 82° TO MAJOR DIA
CHAMFER EXT. THREADS 45° TO MINOR DIA
FINISH:
SURFACE ROUGH.
GENERAL TOLERANCES:
HOLES DIA
ANGLES
SCALE 1:[
DIMENSIONS ARE IN MM. DO NOT SCALE DWG.
DIMENSIONS APPLY BEFORE COATING.
NAME DATE
DRAWN DAVID R. 25-06-00
CHECKED D.KLEINER 25-06-00
DESIGNED ZIV-AV 20-12-99
CHECKED HAIM K. 25-06-00
APPROVED M.GREO 25-06-00
MATERIAL
WEIGHT
S.A.
creo
LEFT HORIZONTAL WHEEL BASE ASSY.
PROJECT LOTEM
CAT.NO. 507BZ0782
SIZE A2
DWG. NO. 732-20782
REV C
SH [OF [