

CONFIDENTIAL: PROPERTY OF CREO INC..

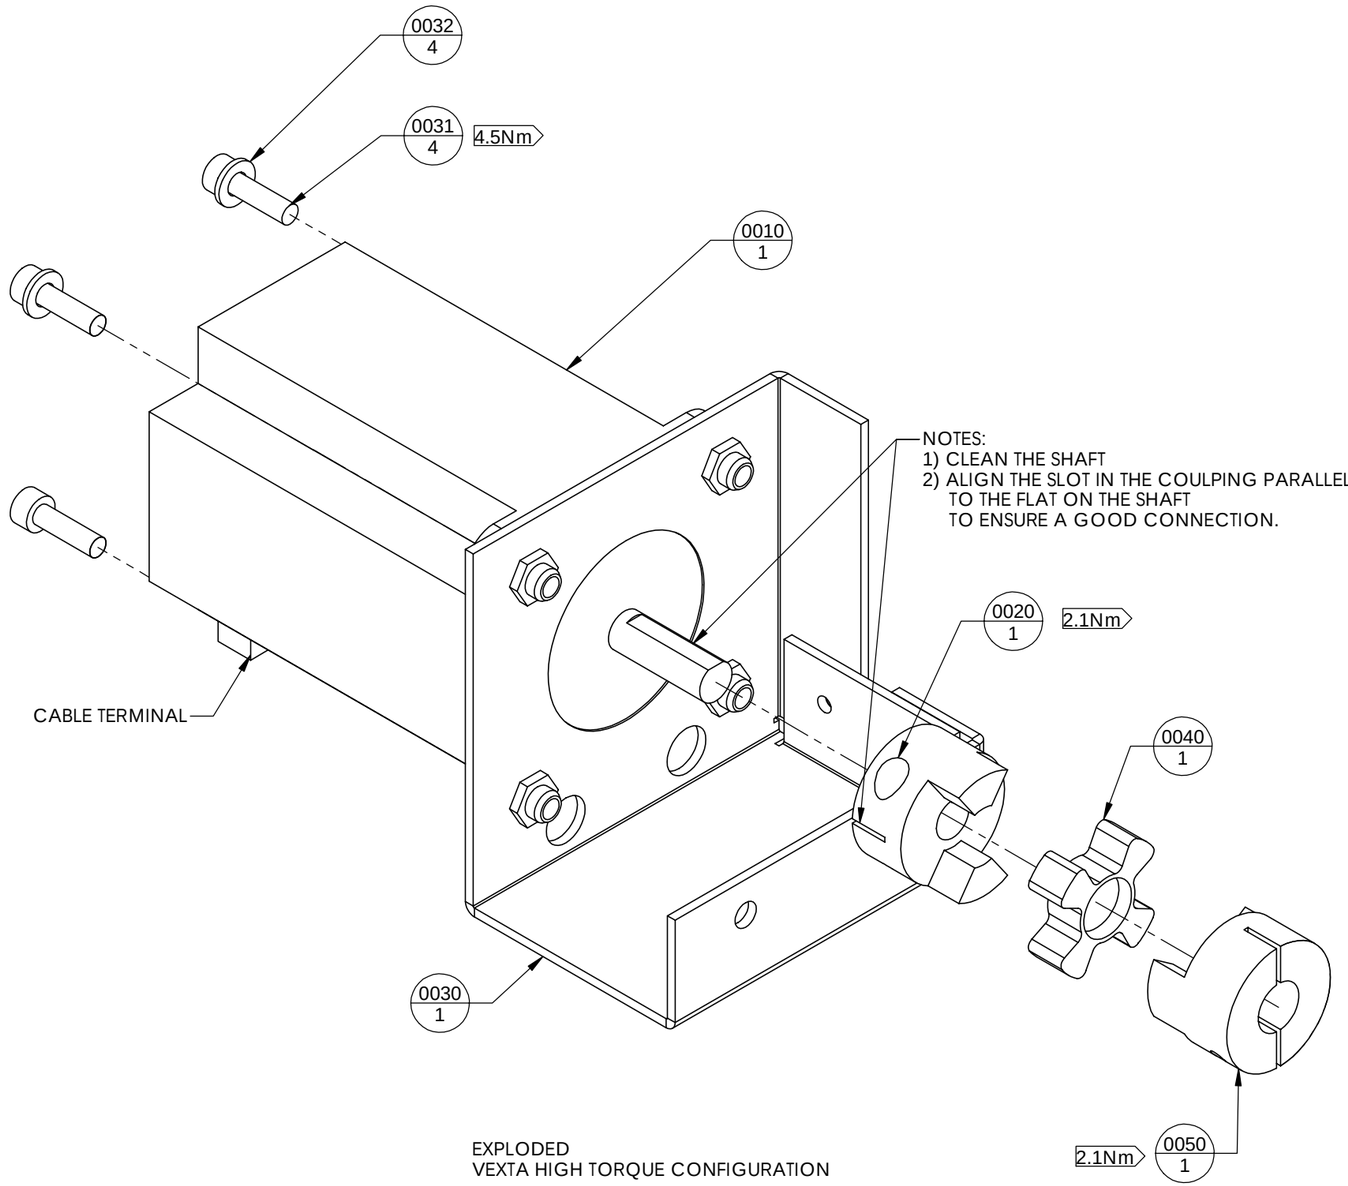

NOTES:
1) CLEAN THE SHAFT
2) ALIGN THE SLOT IN THE COULPING PARALLEL TO THE FLAT ON THE SHAFT TO ENSURE A GOOD CONNECTION.

EXPLODED
VEXTA HIGH TORQUE CONFIGURATION

TIGHTEN TO SHAFT DURING
NEXT HIGHER LEVEL

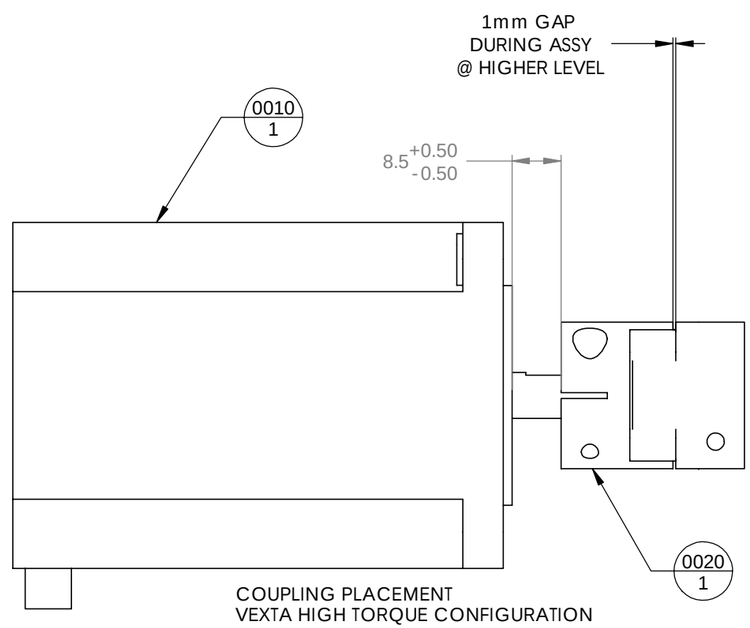

COUPLING PLACEMENT
VEXTA HIGH TORQUE CONFIGURATION

DO NOT USE LOCKTITE
UNLESS SPECIFIED

A NO CHANGES
[PREVIOUS REV 30]

creo

ASSY,MOTOR AND BRKT, LOADER, MALT,MTA

created	changed
1/12/2003 G.Andrew	1/12/2004 GAndrew

MILLIMETERS UNLESS SPECIFIED	© Creo Inc.	size	scale	pages
		B	1:1	1

category	part number	version	revision	doc type	sheet
500 -	00240A -	A -		AD -	1