

CONFIDENTIAL: PROPERTY OF CREO INC..

△C ITEM 0100 REMOVED FROM BOM

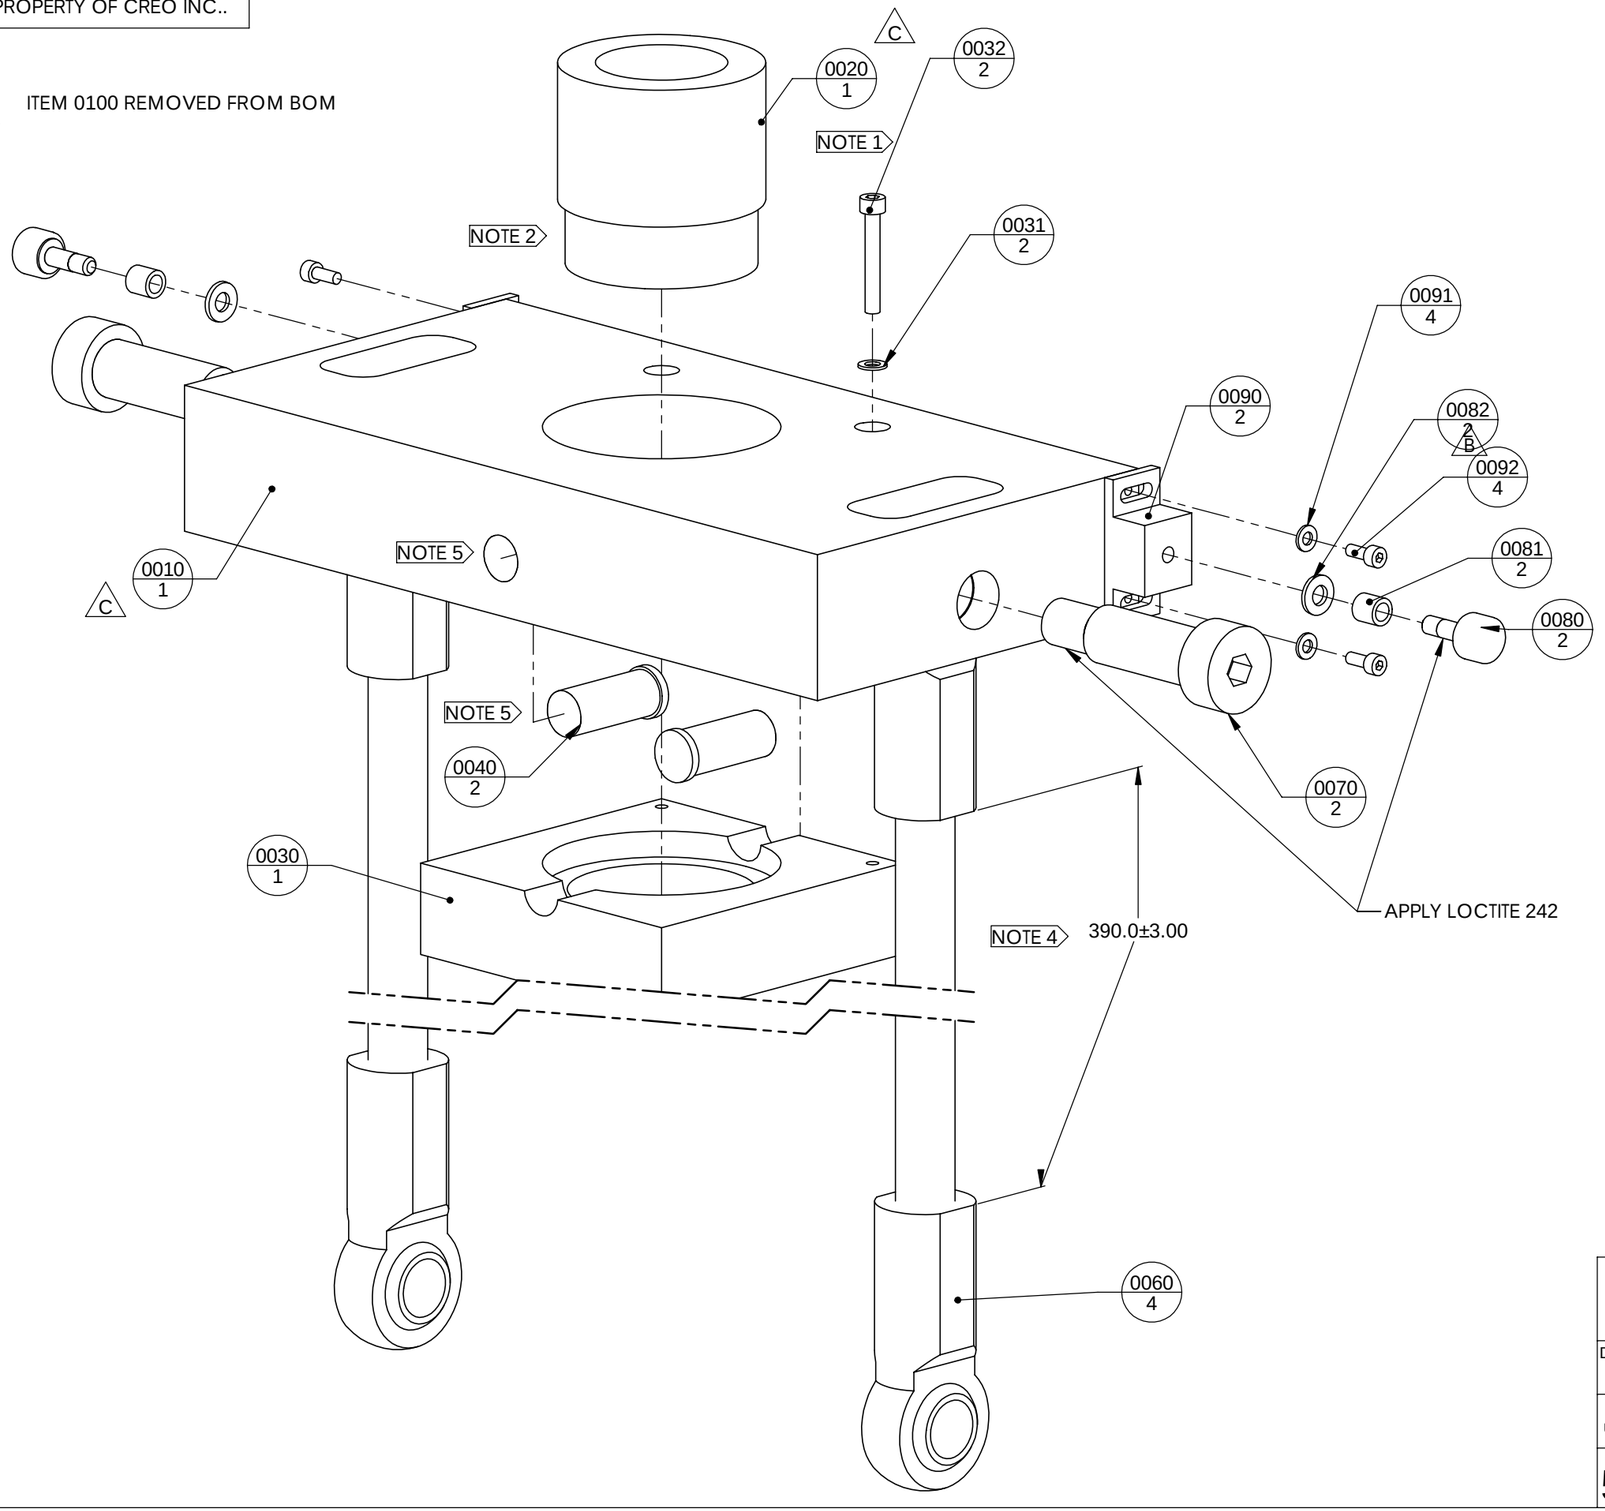



NOTES:

1) SCREW (ITEM 0032) HEAD SHOULD BE FLUSH WITH TOP SURFACE OF ITEM 0010.

2) APPLY SMALL BEAD OF LOCTITE 609 AROUND CIRCUMFRENCE OF ITEM 0020 BEFORE THREADING INTO ITEM 0030.

3) WRAP THREAD WITH TEFLON TAPE. BE SURE NO TAPE EXTENDS BEYOND END OF THREADS.

4) KEEP BOTTOM ROD END EYES CONCENTRIC. TOLERANCE ON DIMENSION MAY NOT VARY MORE THAN 1.5mm BETWEEN SIDES.

5) APPLY EP 2GREASE TO OUTSIDE OF PIN (ITEM 0040), THE INSIDE OF 2 PIN GROOVES (ON ITEM 0030), AND THE INSIDE OF PIN HOLES (ITEM 0010)

© Creo Inc.

PLATFORFM, JACK NUT. MCU,MTA

DESIGNED BY	DRAWN BY				
2002-Dec-11 M.WIGHT	2003-Dec-05 S.ZMURPHY				
MILLIMETERS UNLESS SPECIFIED	CHANGED 2005-Aug-30 M.WIGHT	SIZE B	SCALE 1:2	SHEET 1	
CATEGORY	PART NUMBER VER REV	DOC TYPE	OF		
500	-00523A - C	DD	1		