


CONFIDENTIAL: PROPERTY OF CREO INC..

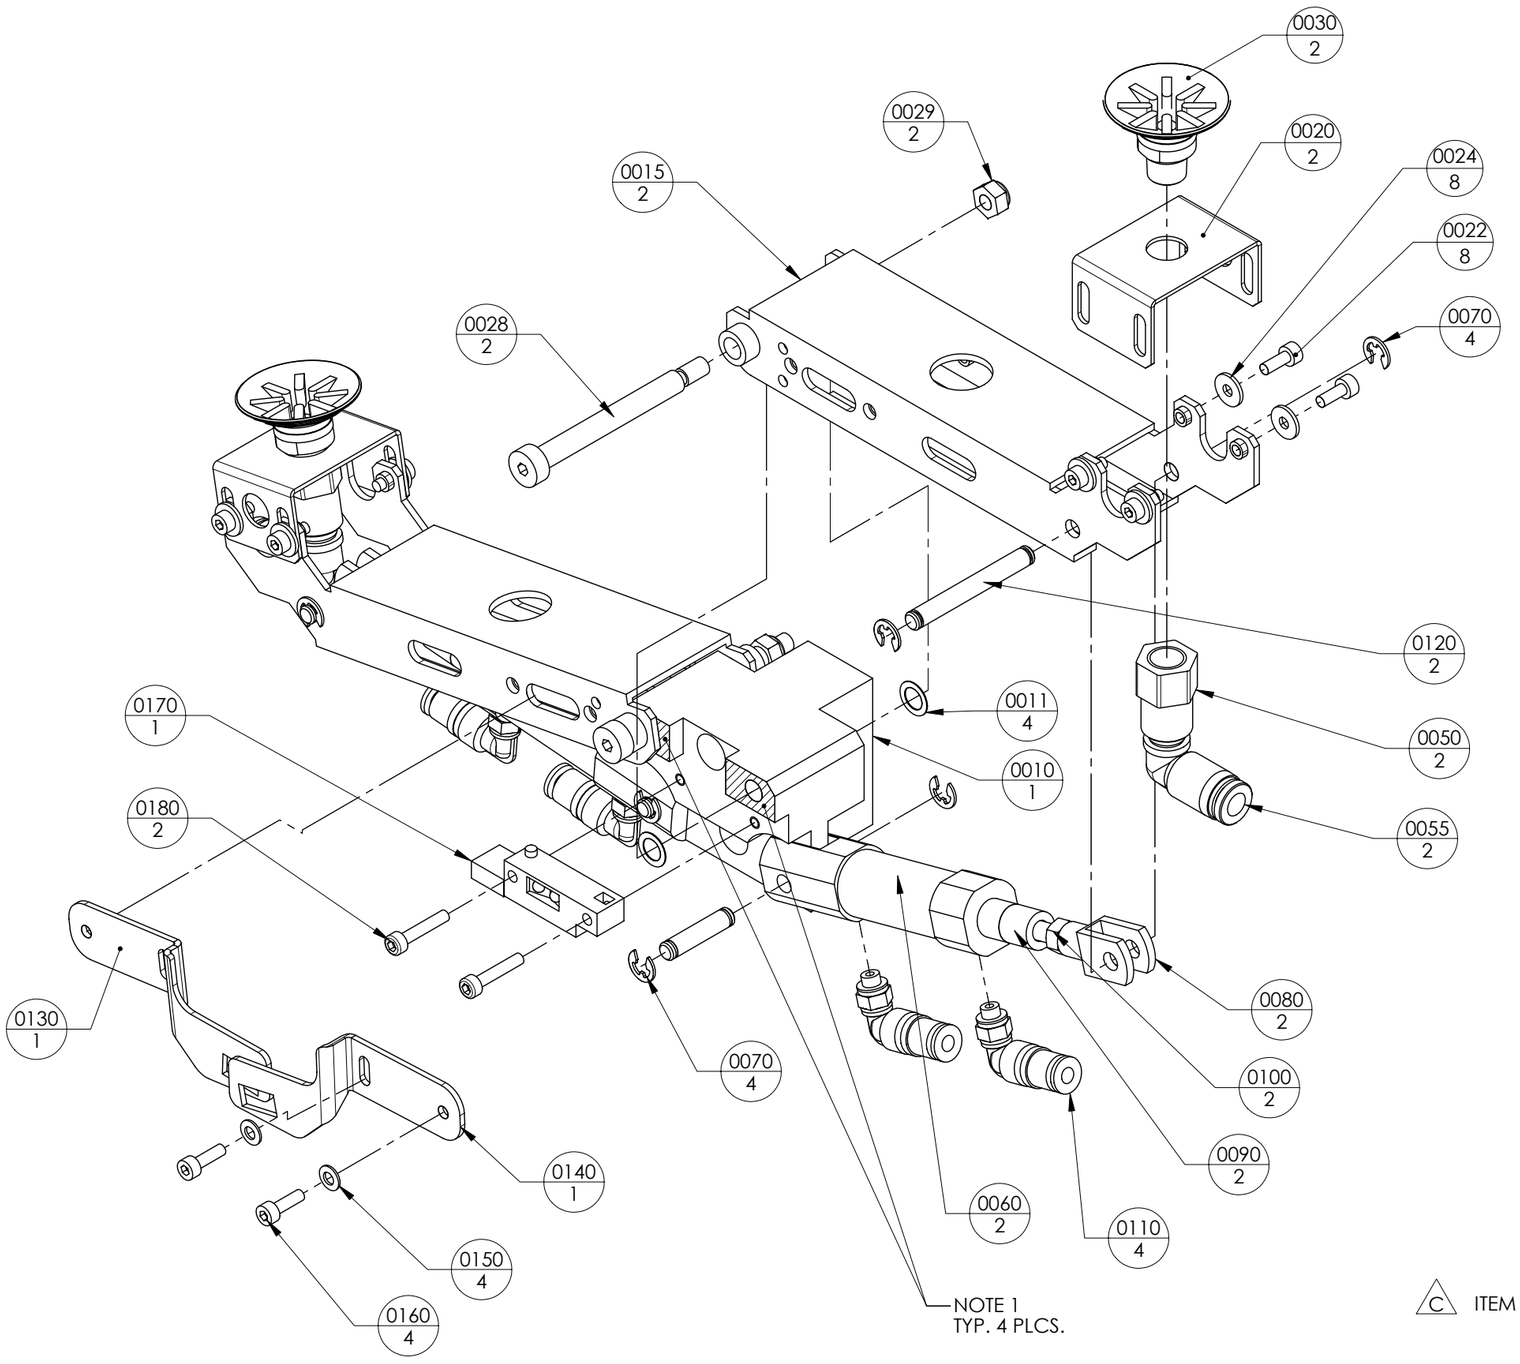

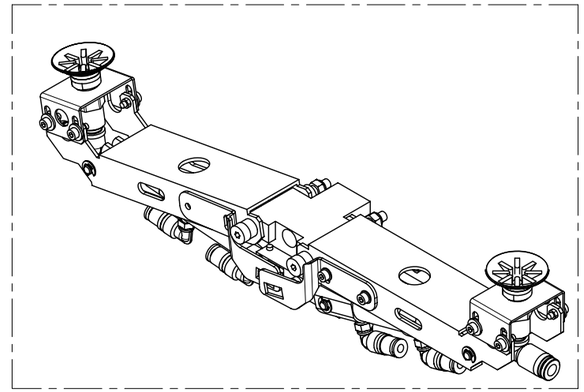

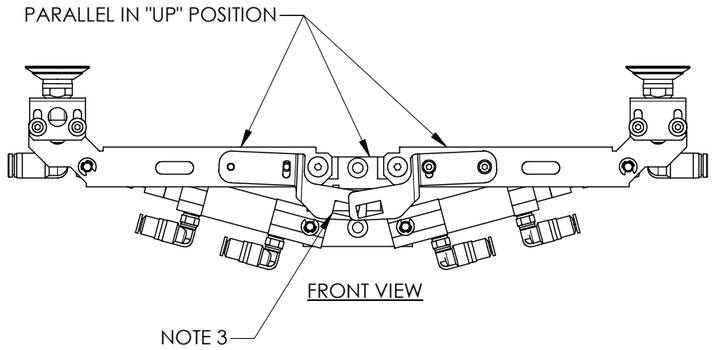

NOTES:

1). COVER ALL 4 INDICATED PLACES WITH UHMW TAPE (56-3226) AND TRIM TO FIT.

2). ADJUST CYLINDERS TO ACTUATE TO HORIZONTAL POSITION AS SHOWN IN FRONT VIEW. LOCK NUTS ONCE ADJUSTED.

3). ADJUST ITEMS #0130 AND #0140 TO HAVE SENSOR (ITEM #0170) BEAM PASS THRU HOLES @ DOWN POSITION BUT NOT WHEN ACTUATED (LIGHT BLOCKED). ENSURE THAT TRIP POINT OF SENSOR IS WITH CUP BETWEEN DOWN POSITION AND 8MM OF DOWN POSITION..

C ITEM # 0040 DELETED

creo

© Creo Inc.

LEFT-RIGHT CUPS, MUT,MTA

DESIGNED BY	DRAWN BY				
R.BOUCHAL 2003-Oct-10	I.PRESS 2003-Dec-23				
MILLIMETERS UNLESS SPECIFIED	CHANGED I.PRESS 2005-Jan-28	SIZE B	SCALE 1:1.5	SHEET 1	
CATEGORY	PART NUMBER	VER	REV	DOC TYPE	OF
500	- 01243B -		C	AD	1