
FCO 04488 – Hood upgrade

Applies to ☑ Magnus VLF Autoloader


Background This upgrade eliminates side-to-side play in the rear hood.

Steps **To upgrade the rear hood:**


1. Install part number 252-06730 on the underside of the rear hood straddling the hood rib and hinge bolt. Use the existing fastener and washer.

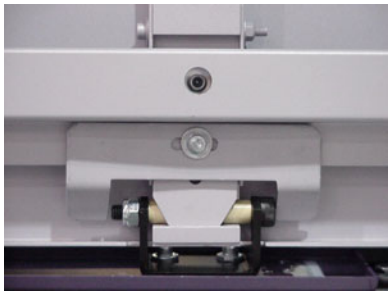

2. Before tightening the hood lock in place, make sure the ends of the hood are aligned with the sides of the machine.

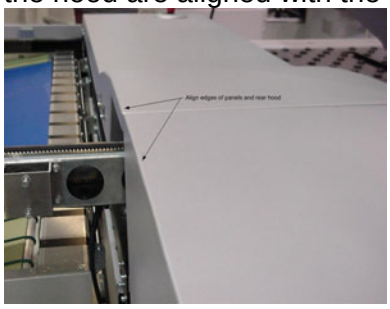

3. Once the hood is aligned, tighten the hood lock down.
4. Adjust the two safety switch interlocking keys (one on either side of the device) so that the key penetrates the lock opening smoothly without hitting its sides.

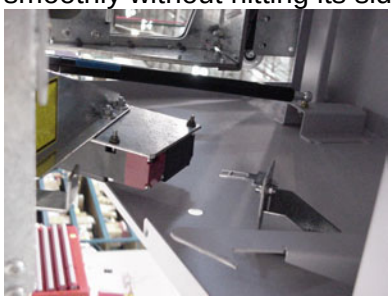

Technical contact Bruce Gordon

Date submitted 19 Jul 2004

Date modified 19 Jul 2004