Installing the SSR Compactor Wrench

Document number: 719-00548A-A

Product	FCO priority
Magnus VLF Multi-Cassette Unit Slip Sheet Removal (SSR) unit	Next visit

Background

The SSR compactor needs a special wrench to open it to clear a paper jam.

Solution

Install the compactor wrench on the SSR bin door.

- Installing the wrench with the cable
- Storing the wrench with the cable
- Using the wrench to open the compactor


Parts required

Part Number	Part Name	Quantity
512-00262A	KIT ,FCO,JAM CLEAR WRENCH,SSBIN,MTA	1


Tools required

- Hex keys

1. Attach the free end of the compactor wrench cable to the bottom of the SSR bin front door with a M4 screw and washer.

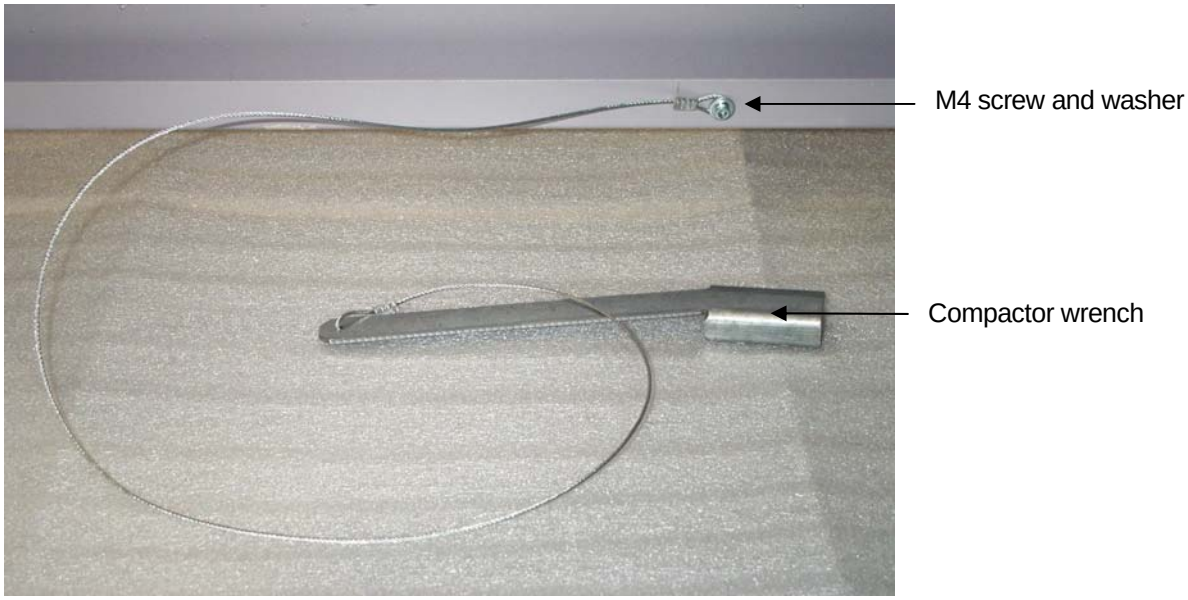

2. To open the compactor, put the wrench over the lever at the bottom of the compactor.

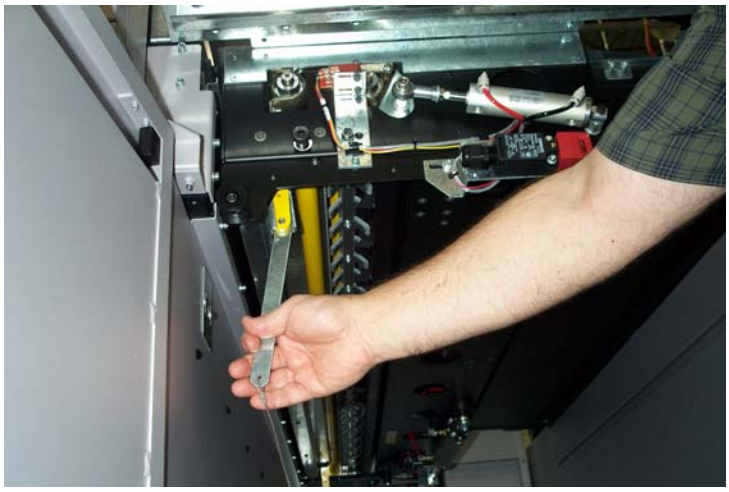

3. Store the compactor wrench and cable inside the SSR bin front door as shown below.



Technical contact	Jacob Gofman
Date submitted	21 Jul 2005
Last updated	25 Jul 2005