Kodak

Magnus VLF

APL Slip Sheet Cart Adjustment

30 Nov 2006

Copyright 2006 Kodak. All rights reserved.

1. PROCEDURE

This document describes the adjustments required for the APL's BETA slip sheet carts. The guide brackets that mate with the guide rail on the frame must be adjusted. There are three vertical locations that the bracket can be placed in depending on the installation height of the APL unit.

1. Set the guide bracket as high as possible without interference.
   Note: If possible, set all carts to the same height such that any cart can be used in any bay. This may not be possible if the customer's floor is very uneven.

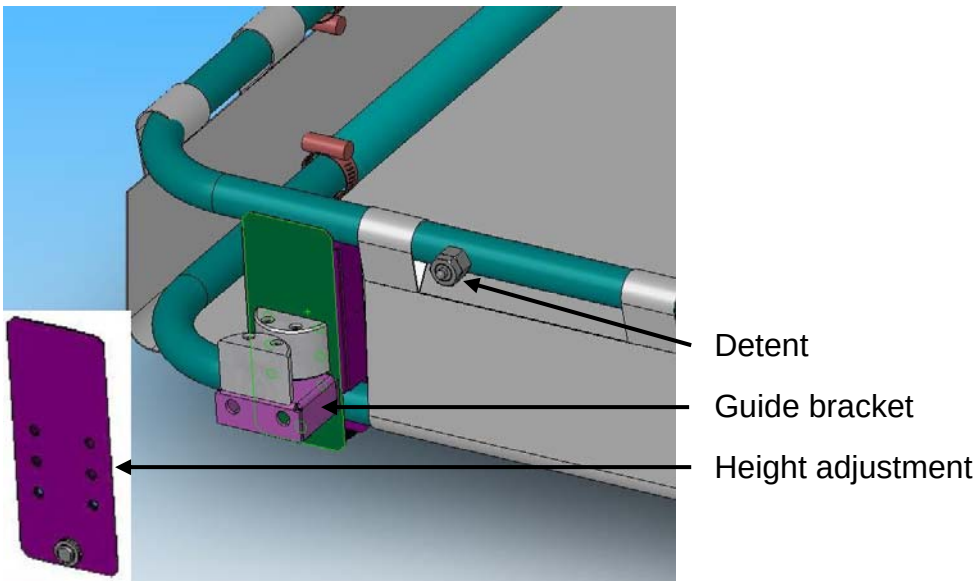


Figure 1: Slip sheet cart adjustment

2. Although the detent is adjusted to the correct location at the factory, it can also be adjusted in or out to improve the engagement/disengagement. The M12 jam nut is used to lock the detent in place.