
REV	DESCRIPTION	DRAWN	APPROVED	DATE

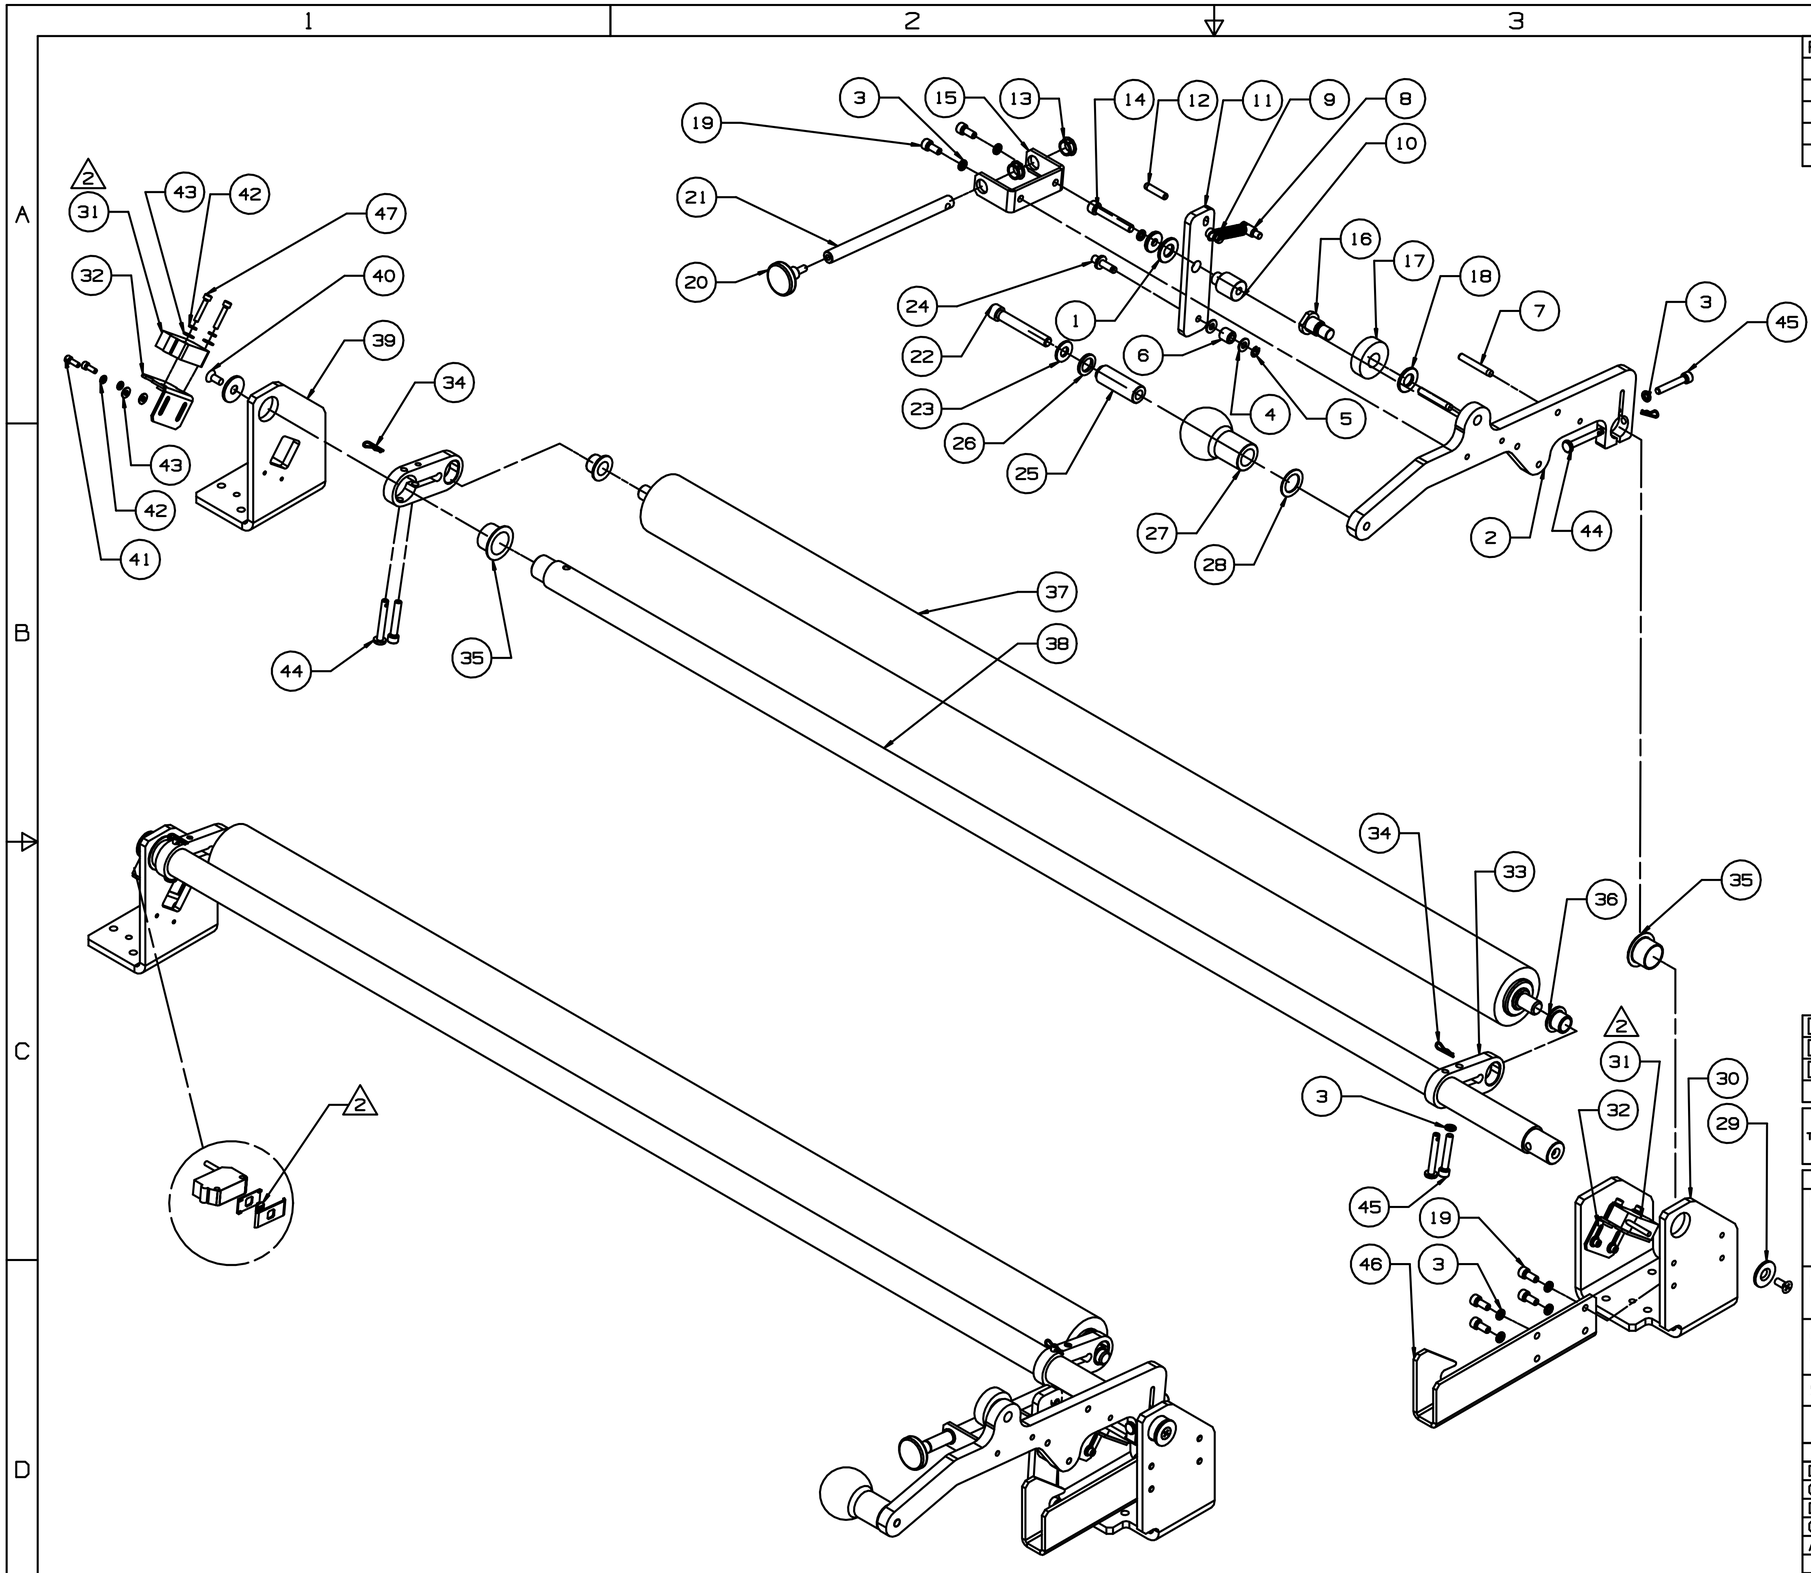

NOTES:
1. USE LOCKTITE 242 ON ALL SCREWS.
2. REPLACE SLIT TO BLUE IN PART NO. 31.

3	
2	
1	

CREO STANDARD PRODUCTION PROCEDURES

THIS PUBLICATION CONTAINS PROPRIETARY INFORMATION OF CREO CORP.LTD.IT IS SUPPLIED TO THOSE CONCERNED WITH THE OPERATION AND MAINTENANCE OF THE EQUIPMENT COVERED THEREIN AND MAY NOT BE DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF CREO

UNLESS OTHERWISE SPECIFIED:

MATERIAL:

FINISH:

SURFACE ROUGH.

SCALE

GENERAL REQUIREMENTS
BREAK SHARP CORNERS AND EDGES 0.2 MAX
FILLET RADIUS 0.4 MAX.
C'SINK INT. THREADS 90° TO MAJOR DIA
CHAMFER EXT. THREADS 45° TO MINOR DIA

GENERAL TOLERANCES:

0 ÷ 30	±-	HOLES 0÷10	+0.2 -0.05
30 ÷ 500	±-	HOLES 10+	GEN.TOL
500 ÷ 1000	±-	ANGLES	±0.5°
1000 +	±-		

DIMENSIONS IN MM. DO NOT SCALE DWG.
DIMENSIONS APPLY BEFORE COATING

	NAME	DATE
DRAWN	MOTI KLAP	20.06.05
CHECKED		
DESIGNED		
CHECKED		
APPROVED		
PROD.ENG		
MFR.ENG		
Q.A.		

creo

FLEXO NARROW ROLLER ASSY

PROJECT	LOTEM_FLX_26X30
CAT.NO.	500-03127A

SIZE	DWG. NO.	REV
A1	500-03127A	10

SH 01 OF 01