
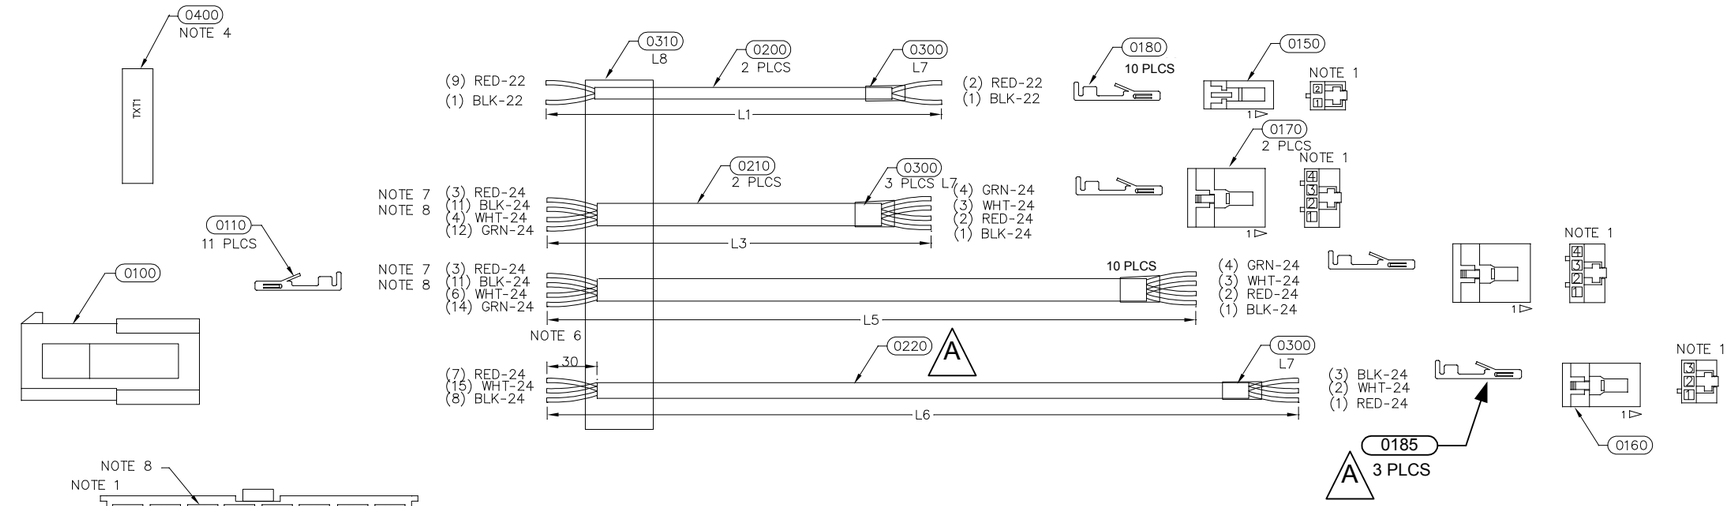


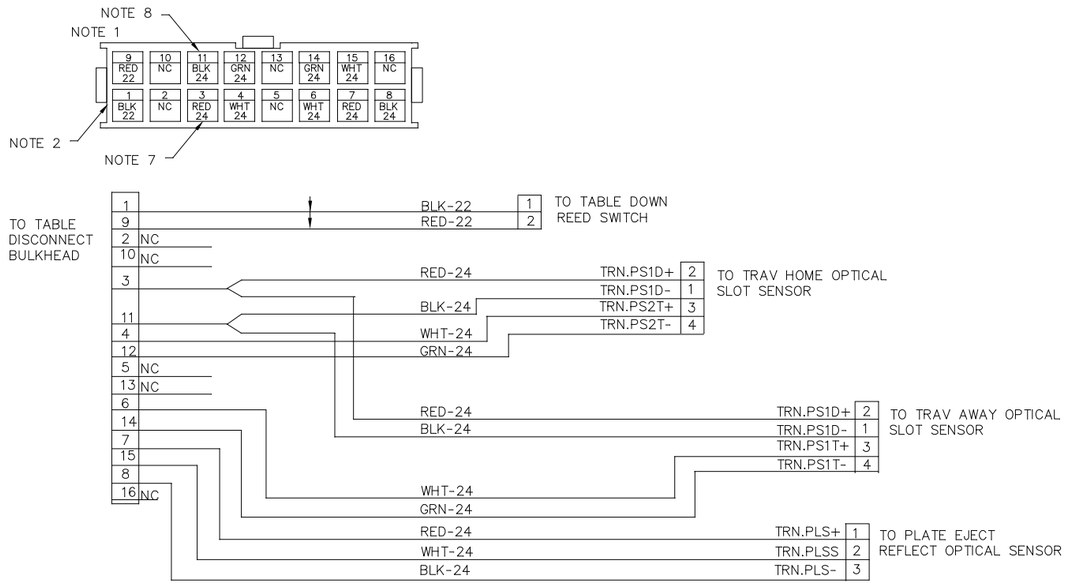

NOTES:

1. CONNECTIONS SHOWN FROM WIRE ENTRY SIDE.
2. 1 / BLK 22 — PIN # / COLOR / WIRE GAUGE
3. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETERS. STANDARD TOLERANCE +20/-0 UNLESS SPECIFIED.
4. ATTACH LABEL (ITEM 0400) 60mm FROM CONNECTOR END
5. EXTEND HEATSHRINK 5mm PAST END OF CABLE JACKET.
6. STRIP 30mm OF JACKET OFF OF CABLES AT BOTH ENDS FOR ALL CABLES.
7. CRIMP (2) RED-24 WIRES INTO PIN 3
8. CRIMP (2) BLK-24 WIRES INTO PIN 11
9. REV B IS BOM CHANGE

A These pins have been changed from gold to tin plating in this version and the length of L6 has changed from 1040 mm to 1190 mm.

REV	ECO	DATE	DRAWING CHANGES BY	DRAWING APPROVED BY
A	E897	AUG. 14, 2002	C.RUECK	R.LEVASSEUR

© COPYRIGHT CREO INC.

CAB,ASSY,TBL SENS SHORT, TS-A ASSEMBLY DRAWING

DESIGNED BY	DRAWN BY
R.LEVASSEUR	C.RUECK

MILLIMETERS UNLESS SPECIFIED	DATE	SIZE	SCALE
	2002:SEPT:04	B	NTS

PART NO.	REV	DOC	SHEET	OF
10 - 3774B - A	AD	1	1	