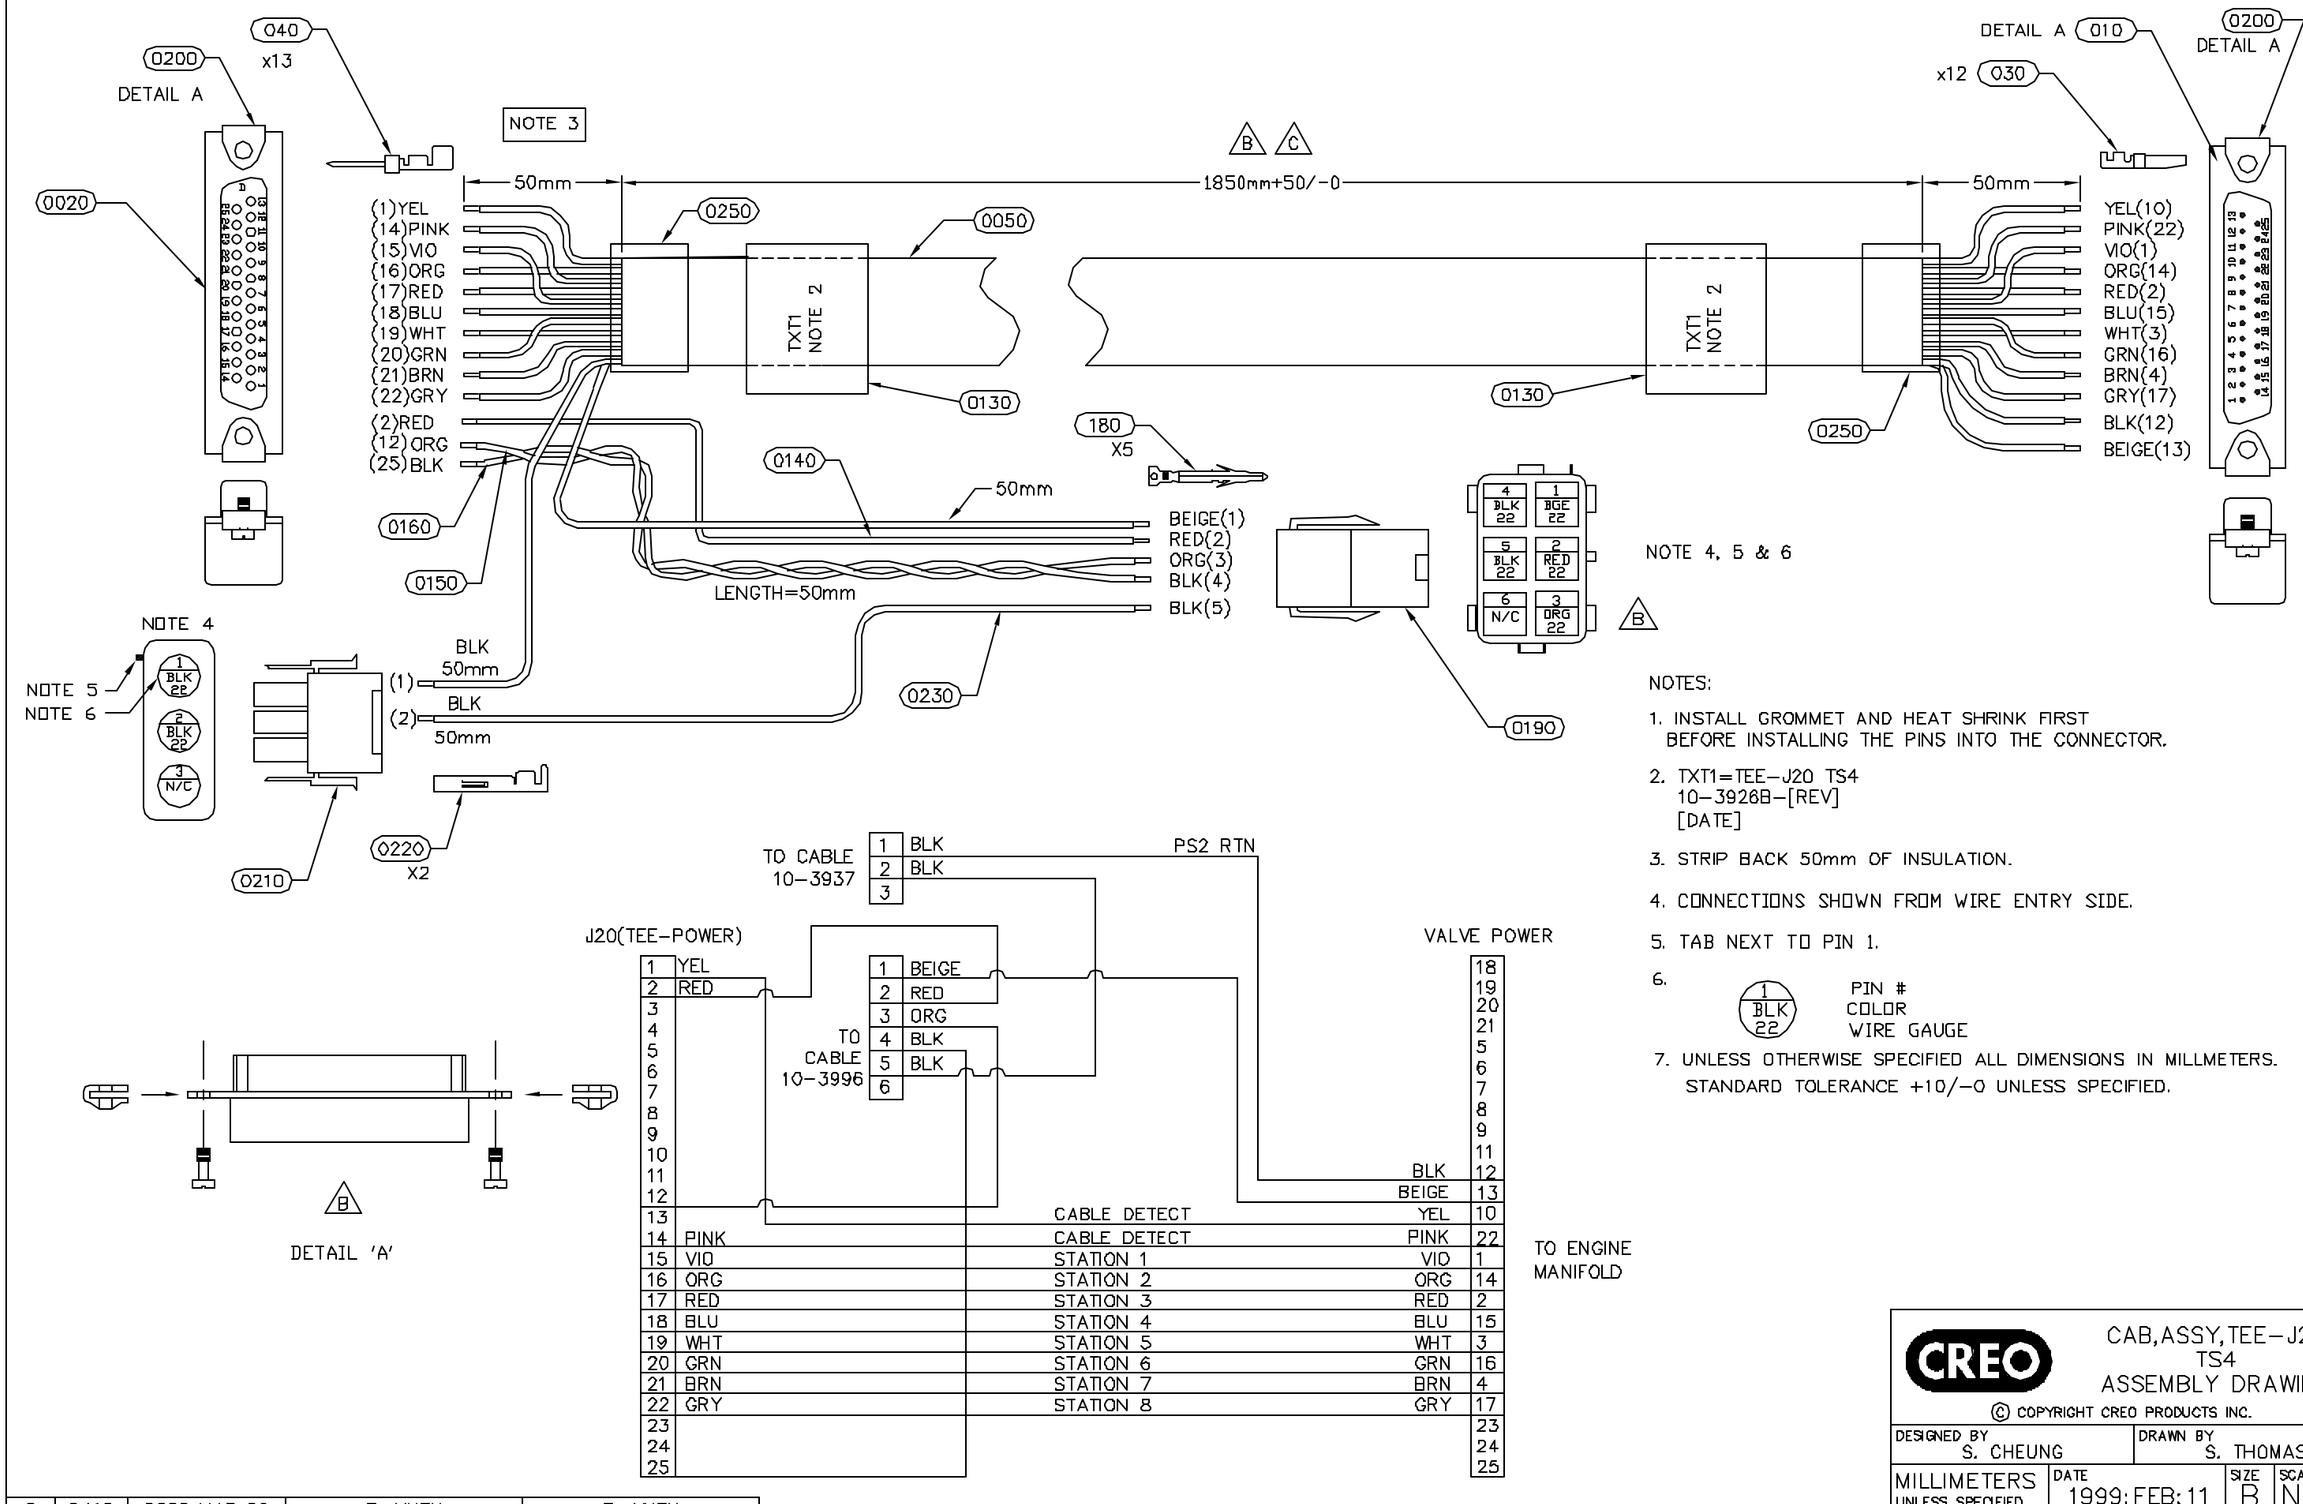


NOTES:

1. INSTALL GROMMET AND HEAT SHRINK FIRST BEFORE INSTALLING THE PINS INTO THE CONNECTOR.
2. TXT1=TEE-J20 TS4
   10-3926B-[REV]
   [DATE]
3. STRIP BACK 50mm OF INSULATION.
4. CONNECTIONS SHOWN FROM WIRE ENTRY SIDE.
5. TAB NEXT TO PIN 1.
6. (1 BLK 22) PIN # / COLOR / WIRE GAUGE
7. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLMETERS. STANDARD TOLERANCE +10/-0 UNLESS SPECIFIED.

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
C	D412	2000:MAR:29	P. YUEN	P. YUEN
B	D228	1999:NOV:10	S. CHEUNG	S. CHEUNG

CREO

CAB,ASSY,TEE-J20
TS4
ASSEMBLY DRAWING

© COPYRIGHT CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY
S. CHEUNG	S. THOMAS

MILLIMETERS UNLESS SPECIFIED	DATE	SIZE	SCALE
	1999:FEB:11	B	N.T.S.

PART NO.	REV	DOC	SHEET	OF
10-3926B-C	AD	1	1	