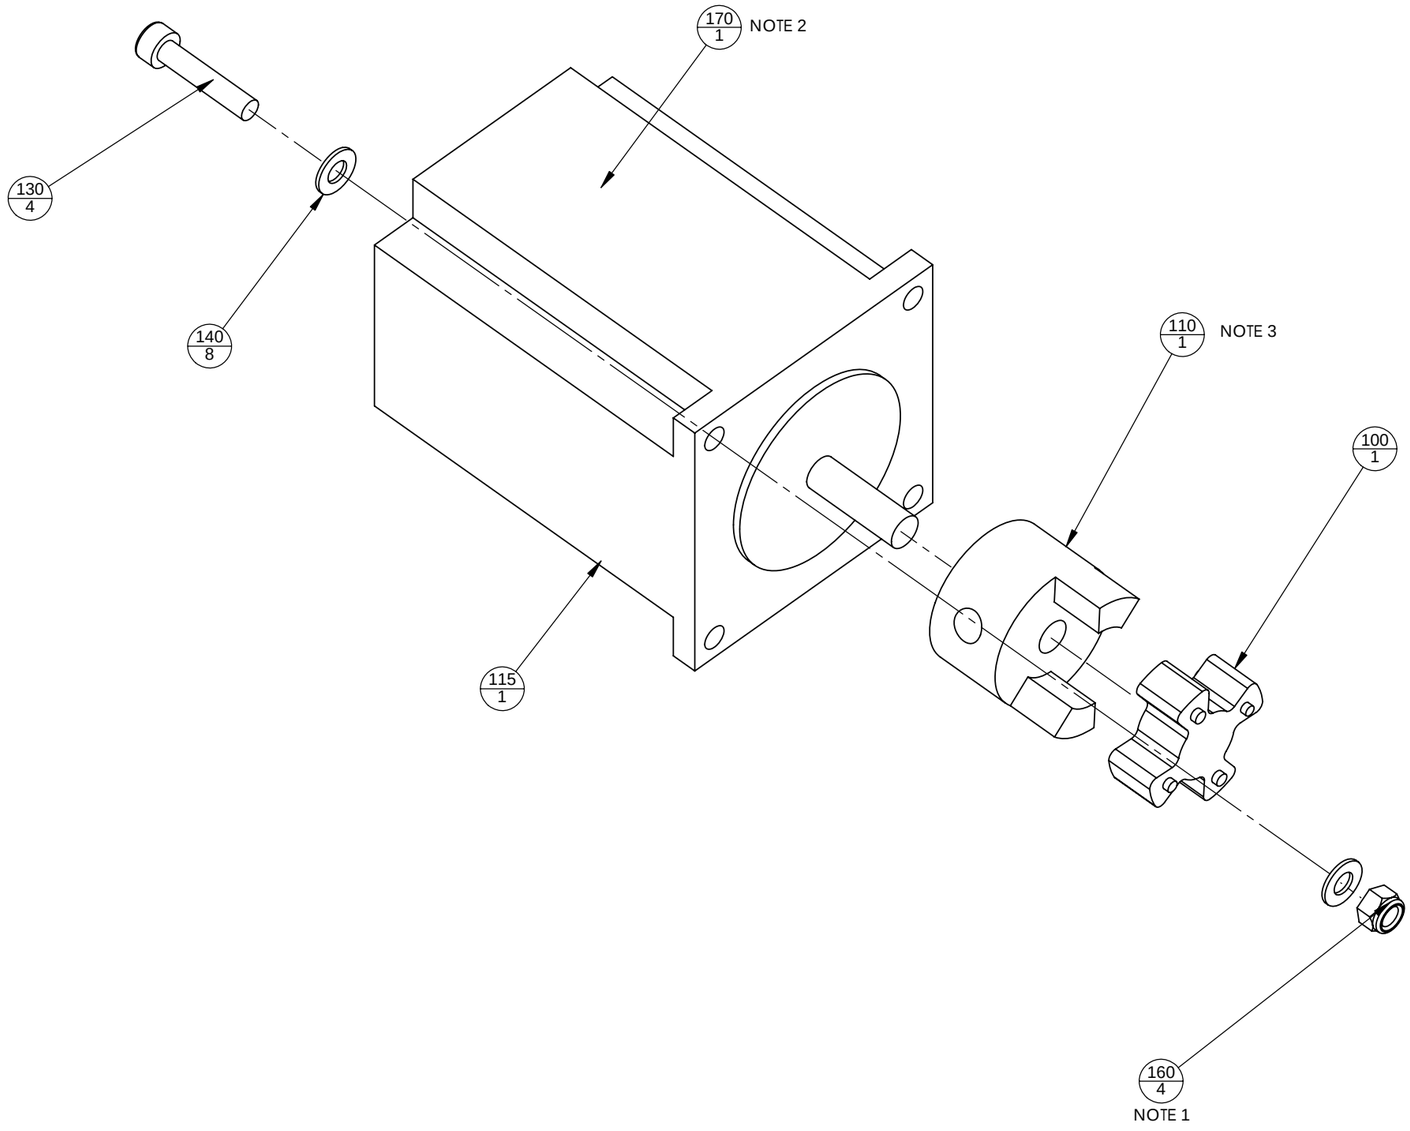


NOTES:

1. TIGHTEN THE LOCK NUTS ONLY TO THE POINT WHERE A COUPLE OF SCREW THREADS ARE VISIBLE.
2. ADD A LABEL TO THE MOTOR THAT READS "M5".
3. USE LOCTITE RC609 ON BUSHINGS AND PULLEY.

THIRD ANGLE PROJECTION	
DEBURR 0.25mm MAX	
UNLESS SPECIFIED ALL MACHINED SURFACES TO BE	3.2
TOLERANCES UNLESS NOTED	
LINEAR: X. ± X. / X.X ± X.X / X.XX ± X.XX / X.XXX ± X.XXX	ANGULAR °: X. ± X. / X.X ± X.X / X.XX ± X.XX / IMPLIED 90° ±

creo

ASSY, MECH, MOTOR UNLD PAN, TSM ASSEMBLY DRAWING

©COPYRIGHT CREO INC.

DESIGNED BY: C. ALLEN	DRAWN BY: W. LAI				
MILLIMETERS UNLESS SPECIFIED	DATE: 2004:FEB:10	SIZE: B	SCALE: 1:2		
PART NO.	REV	DOC	SHEET	OF	
500-02711A	— A	AD	1	1	