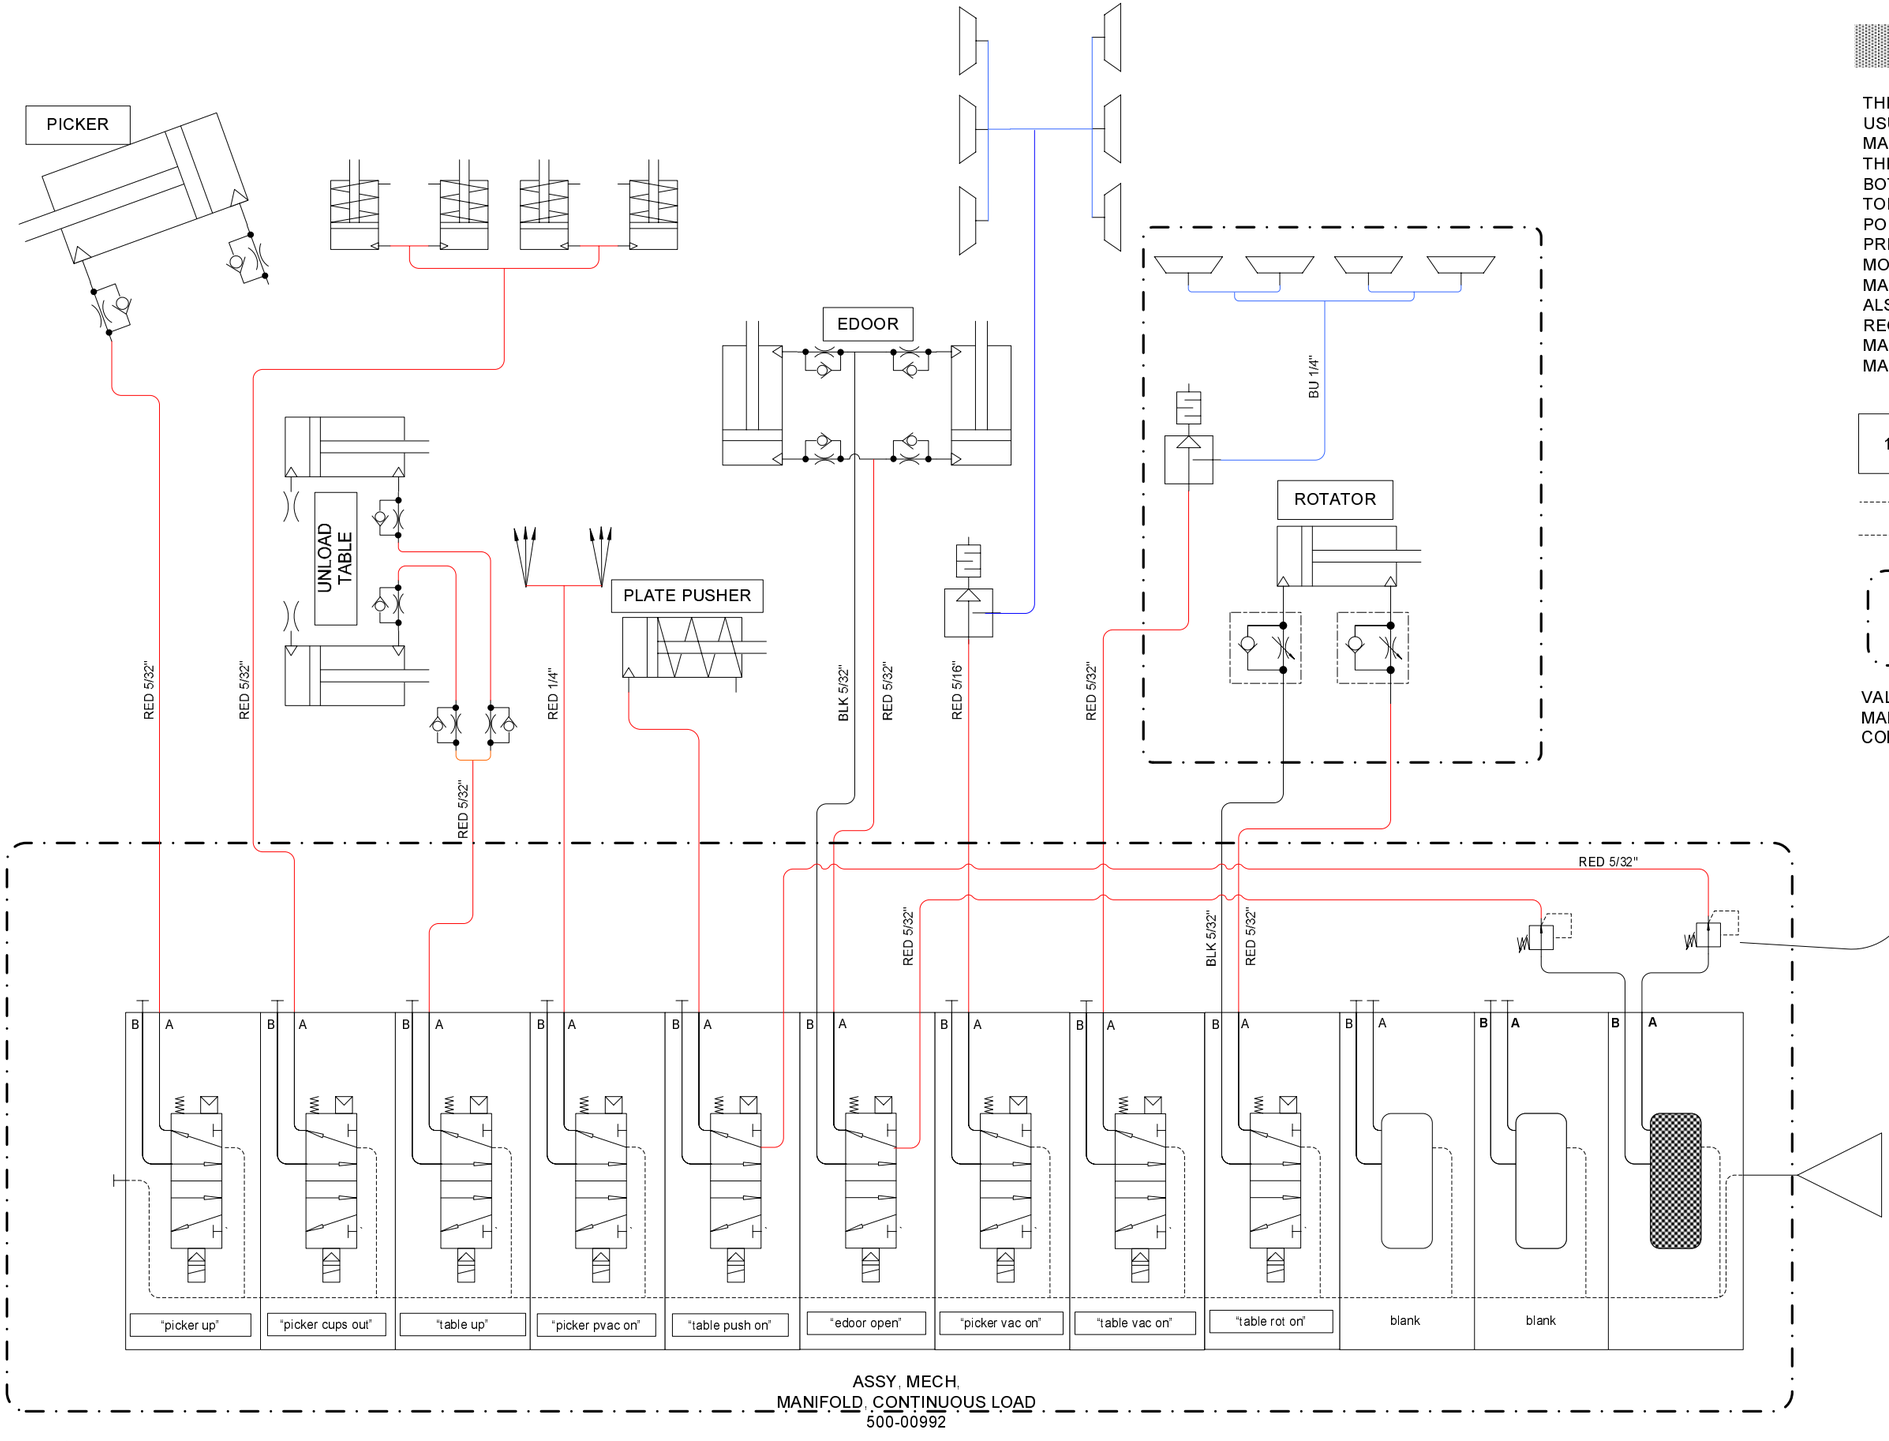


NOTES:

THE VALVE PORTS ARE NOT IN THE USUAL POSITION ON THIS MANIFOLD. VALVE PORTS "A" ON THIS MANIFOLD ARE ALL ON THE BOTTOM ROW. "B" PORTS ARE THE TOP ROW. THIS IS BECAUSE THE "B" PORT IS THE ONE THAT IS DEFAULT PRESSURIZED. WITH THE REVERSE MOUNTING OF THE VALVES ON THIS MANIFOLD, THE PORT POSITIONS ALSO BECOME REVERSED, REGARDLESS OF THE MANUFACTURERS LABEL ON THE MANIFOLD ITSELF.

1 — RECTANGLE BORDER DENOTES LABEL TEXT

DASHED LINE DENOTES INTERNAL MANIFOLD PLUMBING

DASH-DOT RECTANGLES DENOTE COMPONENTS OF AN ASSEMBLY

VALVE NAMES THAT ARE IN QUOTATION MARKS ARE IDENTICAL TO THE COMPUTER COMMAND THAT TURNS THEM ON.

B — EP RELEASE

© COPYRIGHT CREO INC.

DOC, SCHEMATIC, PNEUMATIC, CONTINUOUS LOAD BASE DEVICE

DESIGNED BY	DRAWN BY
DON MacKAY	DON MacKAY

MILLIMETERS UNLESS SPECIFIED	DATE	SIZE	SCALE
	5 DEC, 2003	B	NTS

PART NO.	REV	DOC	SHEET	OF
713 - 00058A	- B	SD	1	1