
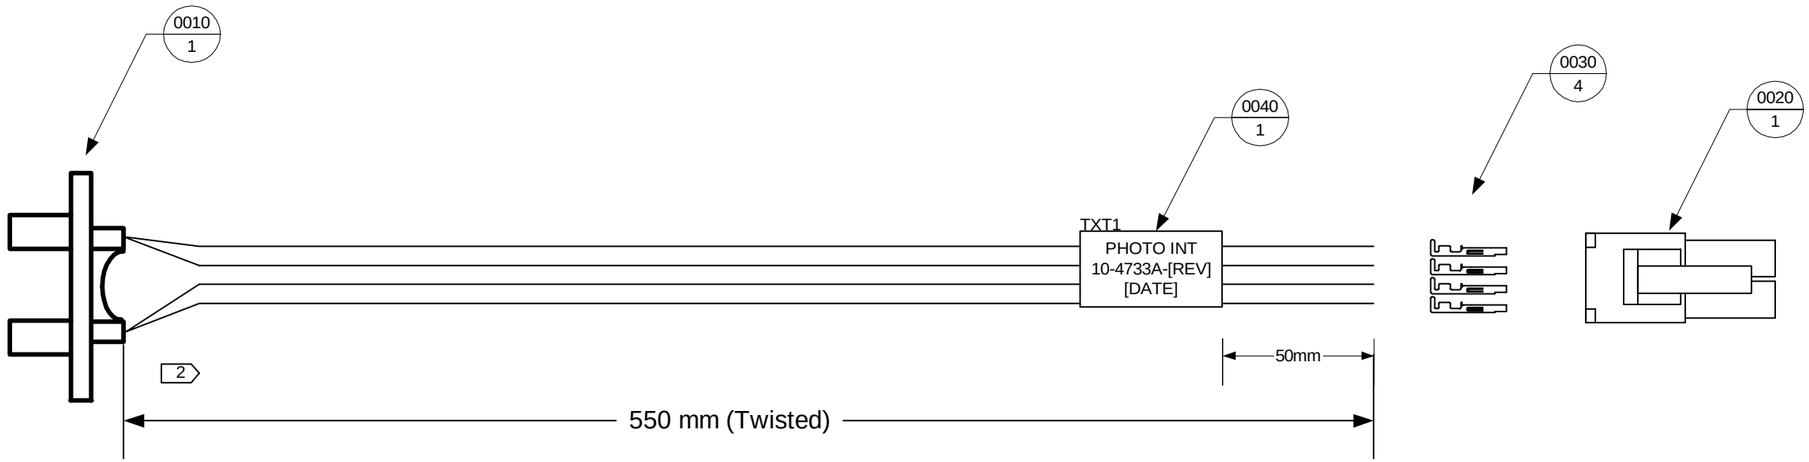


PHOTO INTERRUPTER	LED+	RED 26 | 1
	LED-	BLACK 26 | 2
	COLLECTOR	WHITE 26 | 3
	EMITTER	GREEN 26 | 4

TO SENSOR CABLE



VIEW FROM WIRE ENTRY

Static sensitive device! Wear wrist strip when assembling.

NOTES:

1. 0010 / 1 — ITEM # / QUANTITY #
2. TWIST FOUR WIRES TOGETHER.
3. UNLESS OTHERWISE SPECIFIED, STANDARD TOLERANCE +20/-0.

A2	B2	C2	D2	E2
A	D659	JUN 30, 2000	M. ZHANG	M. ZHANG
REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY

CreoScitex

CAB, ASSY
PHOTO INTER, SLOT,OPQ
Trendsetter 400

DESIGNED BY	DRAWN BY			
M. ZHANG	M. ZHANG			
MILLIMETERS UNLESS SPECIFIED	DATE	SIZE	SCALE	
	JUN 30, 2000	B	NTS	
PART NO.	REV	DOC	SHEET	OF
10-4733A – A	AD		1	1