
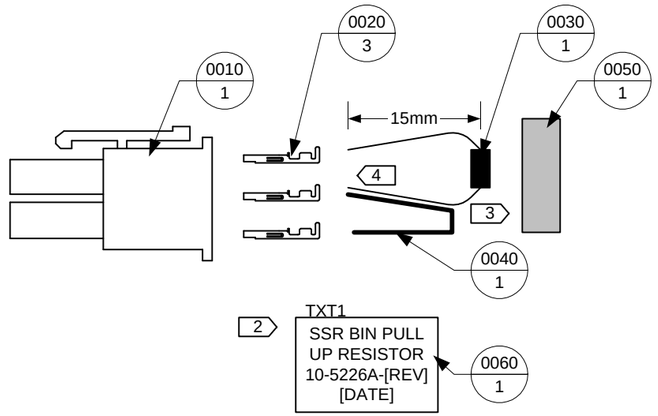


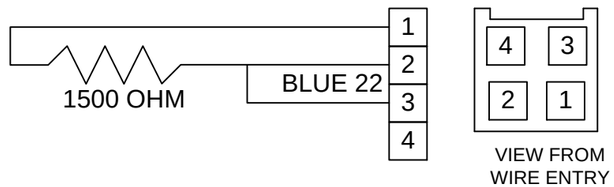

NOTES:

1. 0010 / 1 — ITEM # / QUANTITY #
2. PLACE LABEL ON CONNECTOR
3. AFTER RESISTOR HAS BEEN CRIMPED TO PINS BUT BEFORE INSERTING INTO CONNECTOR, PUT HEAT-SHRINK TUBE ON RESISTOR BODY AND LEADS
4. TRIM RESISTOR LEADS TO 15mm.

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY

CREO

© COPYRIGHT CREO PRODUCTS INC.

CAB,ASSY,
PULL UP RESISTOR
SSR BIN,VAL
ASSEMBLY DRAWING

DESIGNED BY	DRAWN BY			
T.NIVOLIANITIS	T.NIVOLIANITIS			
MILLIMETERS UNLESS SPECIFIED	DATE 2002:JUN:05	SIZE B	SCALE NTS	
PART NO. 10-5226A	REV – A	DOC AD	SHEET 1	OF 1