Kodak Graphic Communications Canada Company
3700 Gilmore Way
Burnaby, B.C., Canada
V5G 4M1
Tel: 1.604.451.2700
Fax: 1.604.437.9891

Request support: http://graphics.kodak.com
ecentral.graphics.kodak.com

Internal: 719-00877A-EN Rev A
Release date: 29 May 2007

Technical Bulletin

Migration Tool Fails to Convert 3.8 Data to 4.6 Data

The Kodak Print Console 4 Migration Tool

If you are upgrading from Kodak® Print Console 3 software to Print Console 4, you can use the migration tool (included in the controlled release) to migrate settings from the 3.x version to the 4.x version.

The migration tool has three components:


- An exporter tool, which collects Print Console 3.x data and stores it in an XML file
- A Print Console importer tool, which finds media sizes, device media settings, cassette configurations, and relevant preference settings in the XML file and imports them into Print Console 4
- A Kodak Prinergy® Evo™ software importer tool, which finds Hot Folder and Print Setup data (related to TIFF options only) in the XML file and imports them into Evo

See the Print Console installation guide for the procedure for using the migration tool.


What to Do if Data Is Not Migrated From Print Console 3.8 to Print Console 4.6

There have been reports that the migration tool cannot convert the cassette configurations from Print Console 3.8 to Print Console 4.6. This happens because the Print Console 3.8 data in the XML file contains a value named **Cassette**, but the Print Console importer tool is looking for a value named **CassetteId**. The solution is to change the data in the XML file from **Cassette** to **CassetteId**.

In this example, the Print Console Data Migration Importer indicates that four cassette configurations have been selected to be imported from 3.8 to 4.6.

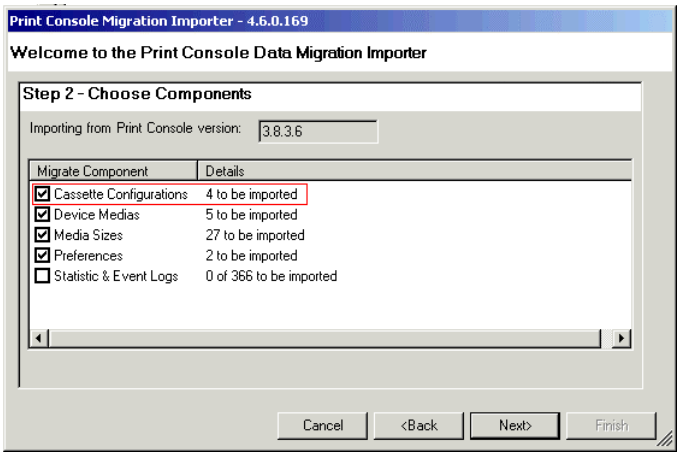

When you click **Next**, the Print Console Data Migration Importer reports that it cannot find the cassette configurations.

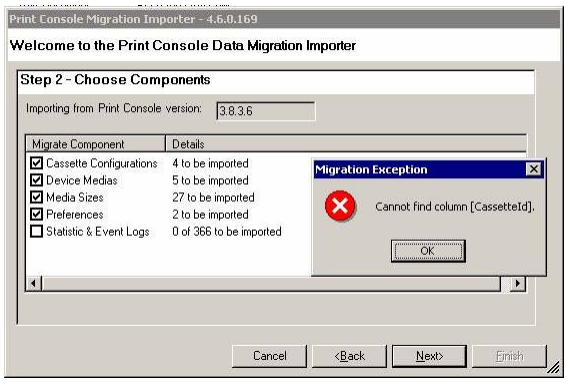

The solution is to find the section in the XML file that contains the cassette configuration information (all the values between **<Cassettes>** and **</Cassettes>**) and change every instance of **Cassette** to **CassetteId**.

3.8 data in XML file

```
<Cassettes>
 <Cassette Name="1">
  <Enable>true</Enable>
  <MediaSize>WEB3</MediaSize>
  <PickFirst>false</PickFirst>
  <TimeLoaded>2007-05-18T18:52:57.0000000-04:00</TimeLoaded>
 </Cassette>
 <Cassette Name="2">
  <Enable>true</Enable>
  <MediaSize>WEB2</MediaSize>
  <PickFirst>false</PickFirst>
  <TimeLoaded>2007-05-19T02:16:57.0000000-04:00</TimeLoaded>
 </Cassette>
 <Cassette Name="3">
  <Enable>true</Enable>
  <MediaSize>WEB7</MediaSize>
  <PickFirst>false</PickFirst>
  <TimeLoaded>2007-05-21T23:20:46.0000000-04:00</TimeLoaded>
 </Cassette>
 <Cassette Name="4">
  <Enable>true</Enable>
  <MediaSize>WEB4_SLOW</MediaSize>
  <PickFirst>false</PickFirst>
  <TimeLoaded>2007-05-19T18:37:03.0000000-04:00</TimeLoaded>
 </Cassette>
</Cassettes>
```

Edited 3.8 data in XML file

```
<Cassettes>
 <CassetteId Name="1">
  <Enable>true</Enable>
  <MediaSize>WEB3</MediaSize>
  <PickFirst>false</PickFirst>
  <TimeLoaded>2007-05-18T18:52:57.0000000-04:00</TimeLoaded>
 </CassetteId>
 <CassetteId Name="2">
  <Enable>true</Enable>
  <MediaSize>WEB2</MediaSize>
  <PickFirst>false</PickFirst>
  <TimeLoaded>2007-05-19T02:16:57.0000000-04:00</TimeLoaded>
 </CassetteId>
 <CassetteId Name="3">
  <Enable>true</Enable>
  <MediaSize>WEB7</MediaSize>
  <PickFirst>false</PickFirst>
  <TimeLoaded>2007-05-21T23:20:46.0000000-04:00</TimeLoaded>
 </CassetteId>
 <CassetteId Name="4">
  <Enable>true</Enable>
  <MediaSize>WEB4_SLOW</MediaSize>
  <PickFirst>false</PickFirst>
  <TimeLoaded>2007-05-19T18:37:03.0000000-04:00</TimeLoaded>
 </CassetteId>
</Cassettes>
```

The XML file is at **C:\Creo\PCMigration**. If you cannot find it there, select **Start > Programs > Print Console 4 > Migration Importer**. In the Step 1 dialog, find the entire file path in **Database file**.

About Kodak Graphic Communications Group (GCG)

The leading provider of graphic communications solutions worldwide, Kodak's Graphic Communications Group (GCG) offers image capture systems; professional color, copydot, and high-speed document scanning systems; inkjet printing and proofing systems; workflow and color management software; thermal imaging devices for film, plates, and proofs; high-quality proofing media, printing plates, and recording film; on-demand color and black-and-white printing systems; data storage products; and professional services. With corporate headquarters located in Rochester, N.Y., Kodak (NYSE: EK) has the largest global sales force and is committed to a digitally oriented growth strategy.

© Kodak, 2007. All rights reserved. Kodak, Creo, and Prinergy Evo are trademarks of Kodak. Adobe, Acrobat, Adobe Illustrator, Distiller, Photoshop, PostScript, and PageMaker are trademarks of Adobe Systems Incorporated. Apple, AppleShare, AppleTalk, iMac, ImageWriter, LaserWriter, Mac OS, Power Macintosh, and TrueType are registered trademarks of Apple Computer, Inc. Macintosh is a trademark of Apple Computer, Inc., registered in the U.S.A. and other countries. PANTONE, Hexachrome, PANTONE Hexachrome, and PANTONE MATCHING SYSTEM are the property of Pantone, Inc. PEARL, PEARLsetter, PEARLhdp, PEARLdry, and PEARLgold are registered trademarks of Presstek, Inc. XEROX is a trademark of XEROX CORPORATION.

Technical data subject to change without notice.