
Installing a Lexmark Network Printer for use with TCP/IP

******** Please note that this document is only valid if the customer's printer has been properly configured for network use and already has a static TCP/IP address assigned to it.

1. Install the 'Network Support' utility from the Lexmark MarkVision CD supplied with the Lexmark printer.

   i. Choose TCP/IP from the components list and click, **OK**.

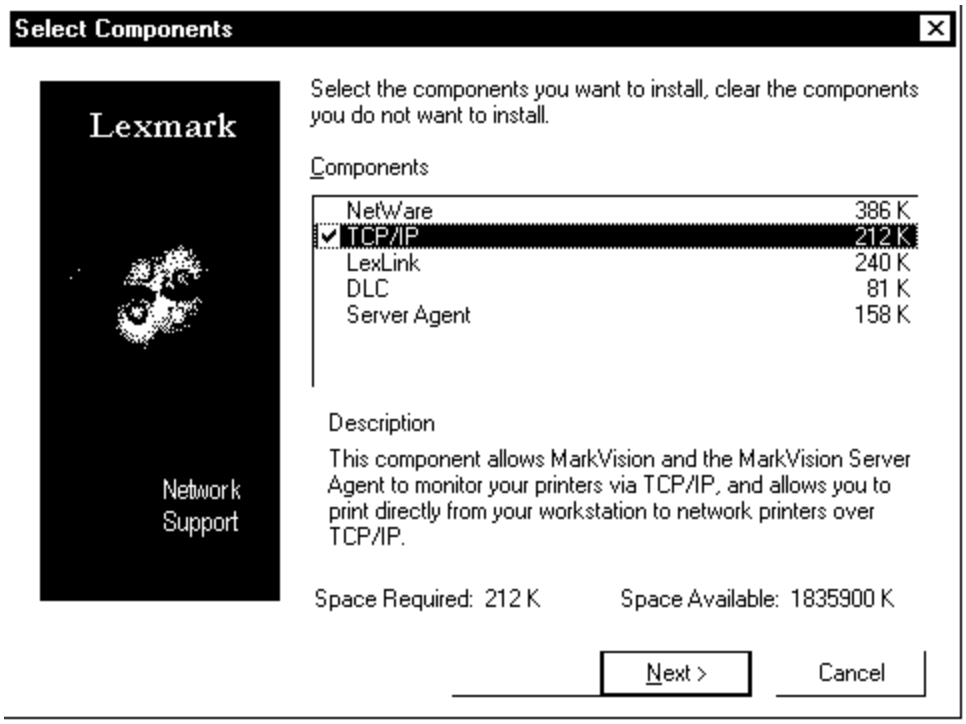


   ii. Choose 'Yes, I want to restart my computer.'

2. Install Printer using NT's 'Add Printer Wizard'.

   i. Select 'Printer connected to my computer'.


   ii. Click, **Add Port**.

iii. Select 'Lexmark Network Port' and click, **New Port**.

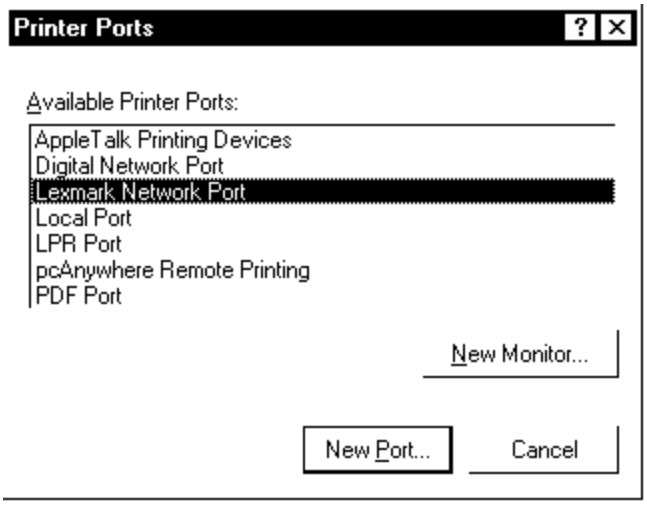


iv. At the 'Add Lexmark Network Port' window, if the corresponding network port is available then choose it. Enter a Logical Port Name, and go to step '**x.**'. If the network port is not in the list you must first add the adapter.


v. Choose **Add Adapter**. (The below example is displaying an existing adapter)

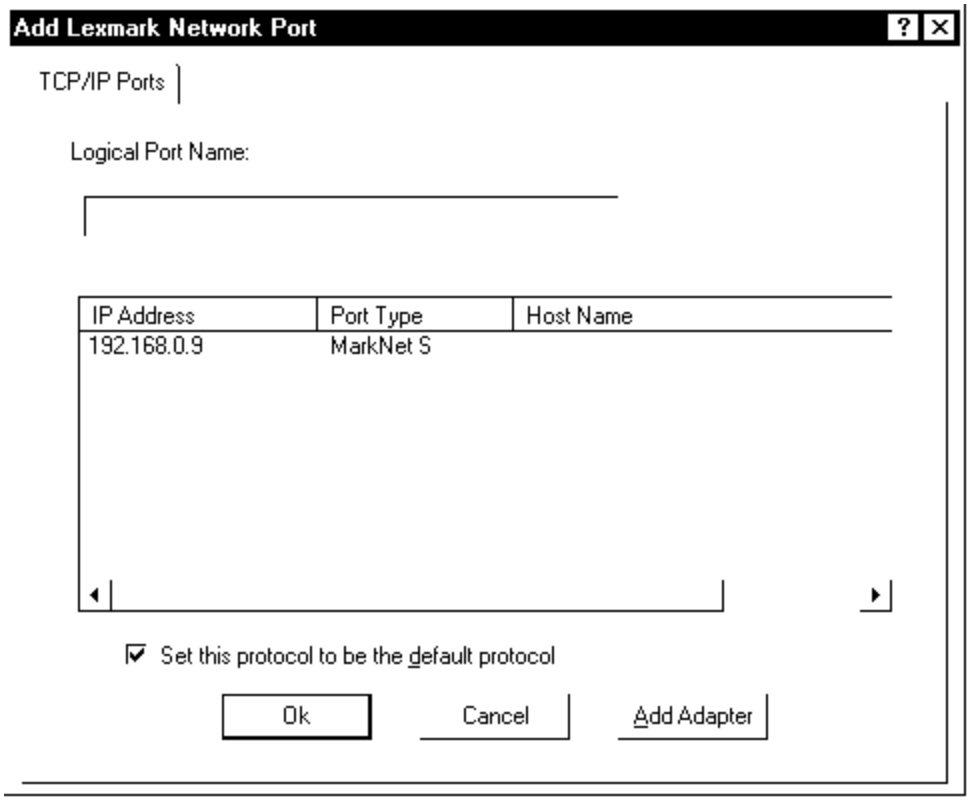


vi. You will then be at the 'Configure TCP/IP' window (example of window below). If the adapter address is in the list then click done and go to step '**x.**'. If it is not in the list, once again click, **Add Adapter**.

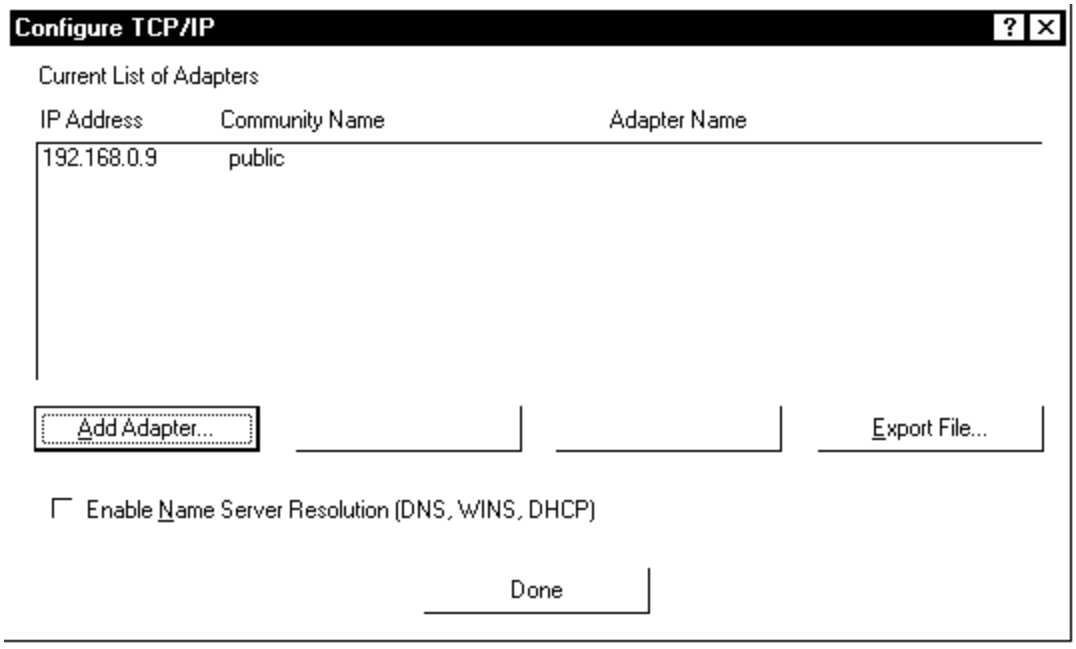

vii. After clicking on Add Adapter you will see the below window, 'TCP/IP Add'. Select Add Single and click, **Next**.

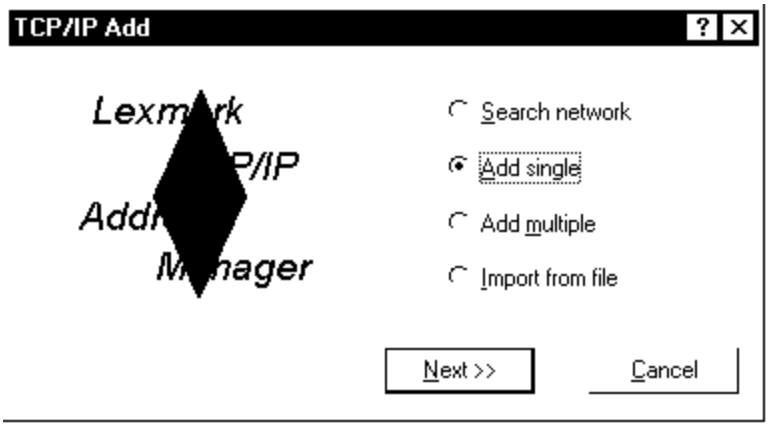


viii. Enter the TCP/IP address, provided by the network administrator, in the space provided. The *Community Name* entry should already have an entry. If one is needed see the network administrator. Proceed by clicking, **OK**.

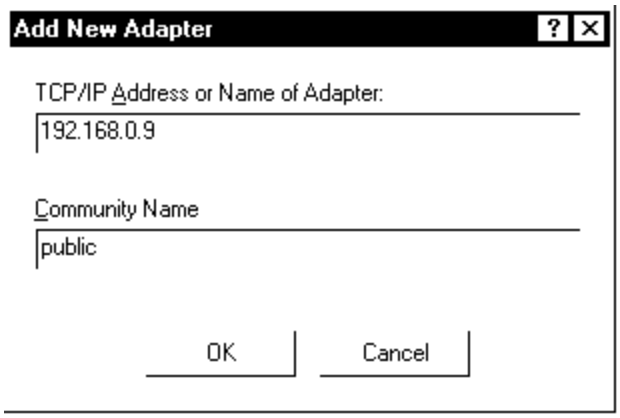

ix. At the 'Configure TCP/IP' window click, **Done**.

x. At the 'Add Lexmark Network Port' Window you should now see the adapter entry. Be sure to leave, "Set this protocol to be the default protocol", checked. Enter a name for the port and select the corresponding IP address and click OK. Close the printer ports window.

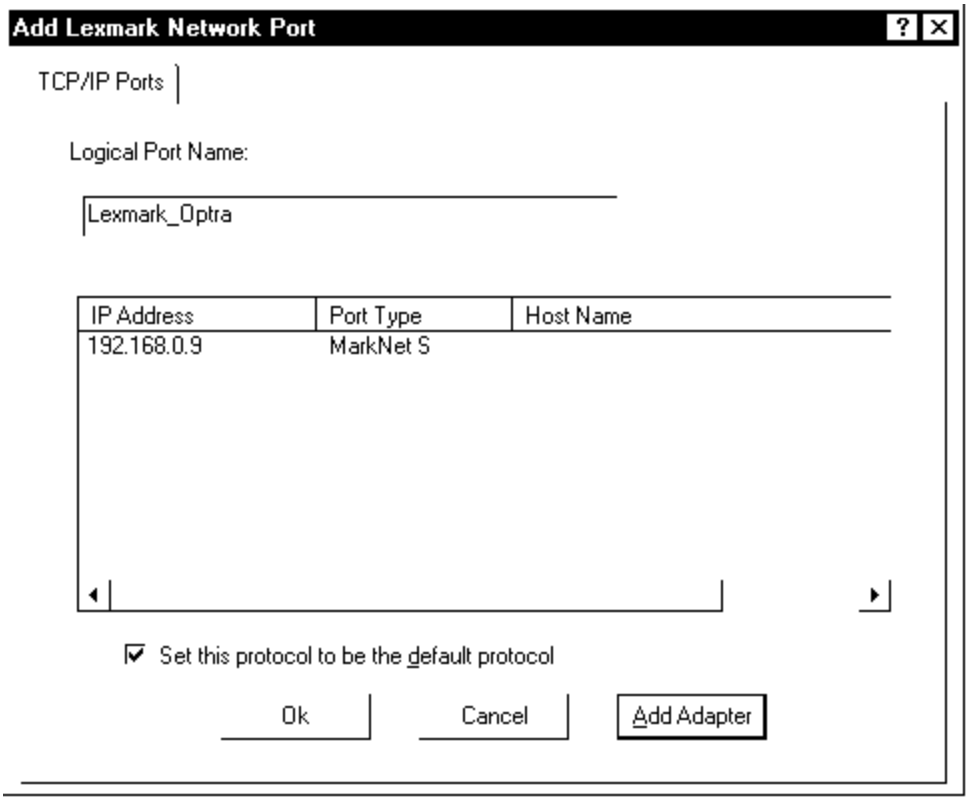

xi. You should now be back to the Add Printer Wizard window. Be sure the port you just added is checked and click, **Next**.

xii. Choose Have Disk and browse to the correct location. Select Lexmark Optra S 2455 PS2 and click next. It is recommended to choose a shorter name for the printer than the default, which is "Lexmark Optra S 2455 PS2".