
CONFIDENTIAL: PROPERTY OF CREO PRODUCTS INC.

ASSY: HEAD ->RESERVOIR 50-1925C
OAL =100"
HOSE 9MM ID SUPER NOBELAIR SOFT, CREO P/N 56-3369
FITTINGS REQ'D: 2 x COLDER #LCD230-6 CREO P/N 55-0704
2 x FAIRVIEW #FBL-625 BRASS FERRULE - CRIMPED
FITTINGS TO BE PARALLEL BEFORE CRIMPING

ASSY: RESERVOIR -> PUMP 50-1927C
OAL = 22"
HOSE 5/8 GOODYEAR HORIZON CREO P/N/ 56-1240 or 16MM ID SUPER NOBELIAR SOFT, CREO P/N 56-3368
COMES WITH : 2 x GREENLINE G7ET-EXTENDED TANG GEAR CLAMP
FITTINGS REQ'D: FAIRVIEW 125-10C, 3/8NPT MALE - 5/8 HOSE BARB COUPLER

ASSY: PUMP ->HEAT EXCHANGER 50-1926B
OAL =24"
HOSE 3/8 GOODYEAR HORIZON CREO P/N 56-3318 OR 9MM ID SUPER NOBELIAR SOFT, CREO P/N 56-3369
FITTINGS REQ'D: 1X FAIRVIEW #125-6C - 3/8" INSERT X 3/8" MALE NPT. CREO P/N 55-0982
1X CLAMP,HOSE,8-15MM,EXTENDED TANG GEAR, CREO P/N 52-7239

ASSY: HEAT EXCHANGER -> HEAD 50-1924B
OAL = 100"
HOSE 9MM ID SUPER NOBELAIR SOFT, CREO P/N 56-3369
COMES WITH: FAIRVIEW 42-8 UNION COUPLING TUBE-TUBE 1/2
FITTINGS REQ'D: 1 X COLDER #LCD230-6, CREO P/N 55-0704
1 x FAIRVIEW #FBL-625 BRASS FERRULE, CREO P/N 55-0978
1X CLAMP,HOSE,8-15MM,EXTENDED TANG GEAR, CREO P/N 52-7239

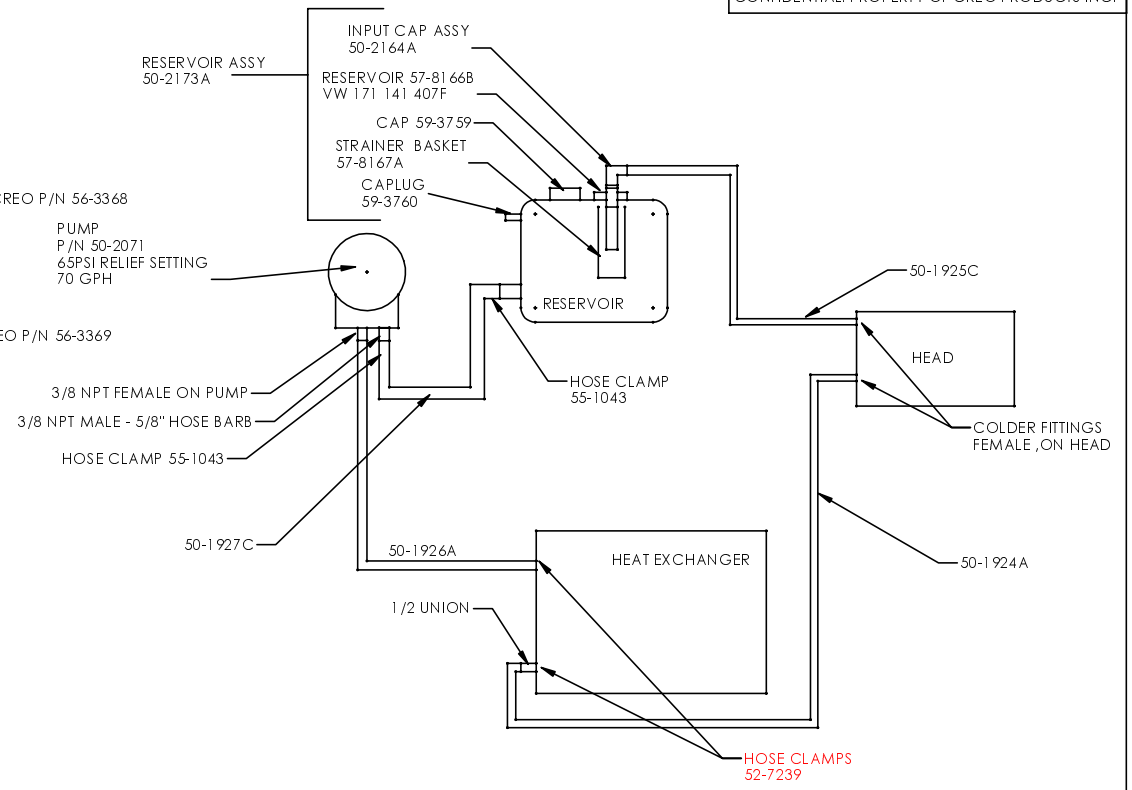

RESERVOIR ASSY BOM 50-2173A
COMES WITH:
RESERVOIR 57-8166B
INPUT CAP ASSY 50-2164A
FILLER CAP (WHITE) 59-3759
STRAINER BASKET 57-8167A
CAPLUG 59-3760

INPUT CAP ASSY, 50-2164
COMES WITH:
O-RING 59-3771A
COLDER FEMALE Q/D FITTING 55-0644
2" LENGTH OF 9mm ID HOSE 56-3369
MODIFIED INPUT CAP 57-8474A

MODIFICATIONS TO CAP 59-3372 TO CREATE 57-8474A
-DRILL Ø41/64
TAP 11/16-24 UNEF THRU

STANDARD OPERATING PRESSURE
= 33 PSI TH2
= 25 PSI TH1.7
@60HZ

UNCONTROLLED DOCUMENT

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
-	-	-	K.J.DANIELLS	K.J.DANIELLS
-	-	-	K.J.DANIELLS	K.J.DANIELLS

CREO

WATER COOLING SCHEMATIC, TS8

© COPYRIGHT 1999
CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY
K.DANIELLS	K.DANIELLS

MILLIMETERS UNLESS SPECIFIED	DATE:	SIZE	SCALE
	NOV 14,01	B	1:2

PART NO.	REV	DOC	SHEET	OF
11-0604C	-	SD	1	1