Creo Inc.
3700 Gilmore Way
Burnaby, B.C., Canada
V5G 4M1
Tel: 1.604.451.2700
Fax: 1.604.437.9891

Request support:
ecentral.creo.com

www.creo.com

Internal: 734-00143A-EN Rev B
Release date: 27 October 2004


Technical bulletin

Replacing an Older Synapse UpFront Dongle

The Sentinel SuperPro™ USB hardware key is now shipped to replace older, damaged USB Rainbow iKey™ or SuperPro parallel dongles.

Before installing your new SuperPro USB dongle, remove your old dongle and ensure that your computer has an available USB port. If it has no USB ports at all, you can install a USB expansion card or, if you do not have enough USB ports, you can install a USB hub to add more. To install your new dongle, follow these steps:

1. Set the new dongle aside. Do not insert it yet.
2. Double-click **C:\Program Files\Creo\UpFront 3.1\Sentinel\Win_nt\Setupx86.exe**.
3. In the **Functions** menu of the Rainbow Technologies Sentinel window that appears, select **Install Sentinel Driver**.

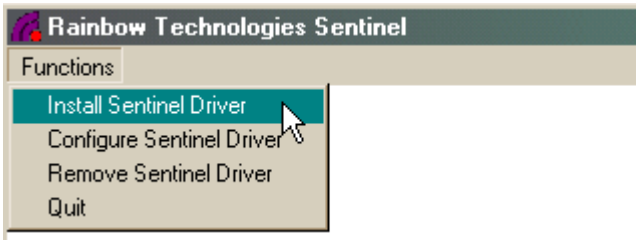

Note: The driver files are already located on your system. If for any reason your driver files are missing from **C:\Program Files\Creo\UpFront 3.1\Sentinel\Win_nt**, the driver is also available for downloading from the Rainbow Technologies web site (www.rainbow.com).

4. In the Sentinel Install dialog box, accept the default path and click **OK**.

   This installs the driver files.



5. You can insert the Sentinel SuperPro USB dongle into an available USB port after you see the Driver Installed message. (You do not need to restart your system yet.)

6. When the Found New Hardware Wizard appears, click **Install from a list or specific location**.



7. Locate the driver at **C:\Program Files\Creo\UpFront 3.1\Sentinel\Win_nt\I386**.

   Note: If Windows® displays a dialog box that says the driver is not digitally signed, click **Continue Anyway**.

8. Restart Windows.

   The next time you start Synapse UpFront®, you will need to enter the license number that was provided with the hardware key. If you installed this dongle to replace a damaged one (and not because you're installing a software upgrade or update), the same features will be licensed as before.

About Creo

Creo is a world leader in solutions for the graphic arts industry. Core product lines include image capture systems; inkjet proofers; thermal imaging devices for films, plates, and proofs; professional color and copydot scanning systems; workflow management software; and proofing and printing consumables. Creo is also an original equipment manufacture supplier of on-press imaging technology, components for digital presses, and color servers for high-speed, print-on-demand digital printers. Creo trades under the symbols CREO on NASDAQ and CRE on the Toronto Stock Exchange. www.creo.com

© 2004 Creo Inc. The Creo product names mentioned in this document are trademarks or service marks of Creo Inc. and may be registered in certain jurisdictions. Other company and brand, product, and service names are for identification purposes only and may be trademarks or registered trademarks of their respective holders. Data is subject to change without notice.