Kodak

Trendsetter VLF

Returning Trendsetter VLFs for Refurbishing

Document Number
719-00754A-B

08 Feb 2007

Copyright 2007 Kodak. All rights reserved.

1. OVERVIEW

Trendsetter VLF devices that are replaced with a new Kodak CTP device are returned to Vancouver, Canada for refurbishment. These devices will be marketed as Kodak Remanufactured Systems. To minimize damage and factory repairs, the Field Service Engineer preparing the device for return must follow the instructions contained in this document.

2. PREPARATION

The Trendsetter VLF device and the Thermal Head must be returned in their proper respective shipping crates. Trendsetter VLFs must not be shipped with the head left installed. If you do not have crating materials available, contact the Implementation Planner for your region at least two weeks prior to the removal date.

2.1 Other Returnable Components

Other components that may be returned with the Trendsetter VLF device and thermal head include:

- Debris removal cabinets- All Morgan cabinets and UDRC cabinets with a serial number below DC2000 will not be refurbished, and are scrapped. Check with your implementation planned to determine if scrapping the debris cabinet locally is an option. UDRC's above DC2000 are to be returned for refurbishment.
- Lytron heat exchangers- return for refurbishment and use in Service Stock
- Chillers- Due to the refrigerant they contain, chillers are to be returned to Vancouver for proper decommissioning and disposal

The return of Trendsetter VLF Autoloaders will be handled on a case by case basis, and components to be returned must be coordinated through your region's Implementation Manager.

3. RETURNING THE TRENDSETTER VLF

1. Before uninstalling the device, you must:
   - Complete the Device History Sheet contained in this document—see Appendix A..
   - Move the thermal head to a position that allows it to be removed from the device for shipping. **Note:** Trendsetter VLFs must not be shipped with the

head left installed. They lack the appropriate supports to prevent damage to the head and carriage during shipping.


- Place the magnetic clamps on the drum in the park position.
- Take digital photos (min 800x600) of the device exterior and load table with all panels installed, similar to the positions shown below.




2. Uninstall the Trendsetter VLF device in the reverse order of installation.

Note: Take care to follow all static precautions when handling the thermal head.


3. Before packaging the device, you must:
   - Ensure all surfaces of the Carriage tracks are coated with a light film of track grease (Kluber GL 261, 89-0007) to prevent corrosion during shipping.
   - Ensure all surfaces of the ballscrew are coated with a light film of ballscrew grease (NSK #1, 89-0276) to prevent corrosion during shipping.
   - Remove the air inlet nozzle and plug the opening.
   - Place the appropriate padding and bracing under the LEC/TEC, drum, load table, and counterweight.

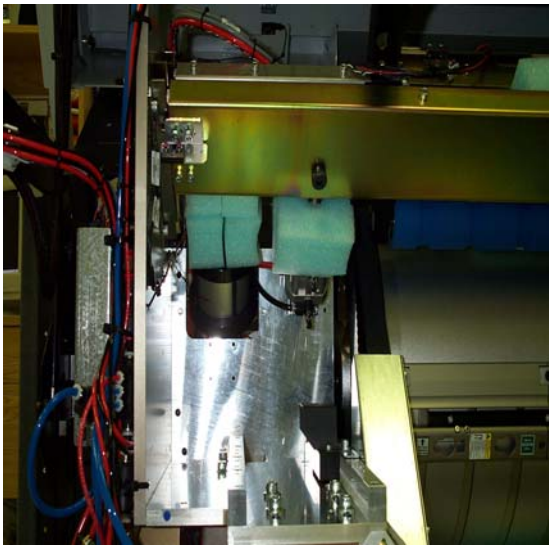

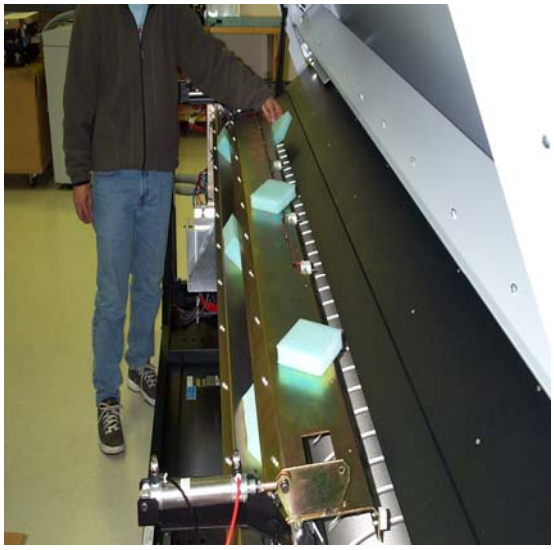





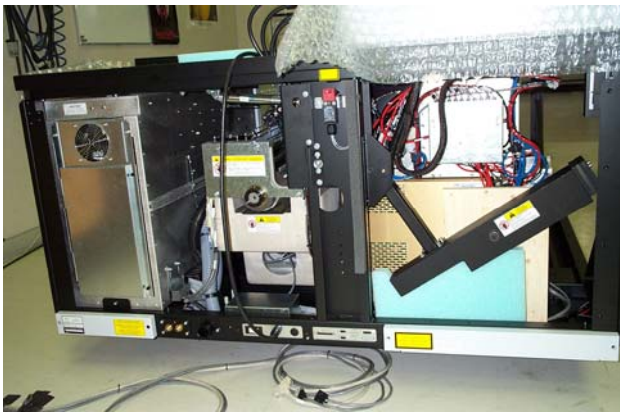



4. Crate the Trendsetter VLF device, the thermal head, and any other components that must be returned to manufacturing.

5. Return all crates to Vancouver, Canada.

6. Email the history sheet and digital photos to the Outlook Distribution list **#CCA-Planners of KMAT's**. Alternately, if you cannot send to this list, email the document and photos to the Implementation Planner for your region, who will then forward them on to this list.

4. APPENDIX A - DEVICE HISTORY SHEET

This sheet must be filled in by the device site owner in the field. Fill in as much of the requested information as possible and email to the outlook distribution list **#CCA-Planners of KMAT's** together with the device photos.

Machine History	**Please enter the following information**		
Serial Number	**B**	Original ship date (mm/yr)	
Site Owner			
Plate Count (list stats)			
Laser on-time (list stats)			
Debris cabinet type	Morgan debris cabinet: ☐	UDRC: ☐	No debris cabinet: ☐
Media type(s) used			

Have any of the following parts been replaced during the past 2 years? (Check if Yes)

Thermal Head: Serial Number:				***Device Speed: S:*** ☐	***F:*** ☐	***V:*** ☐
Chiller: ☐		Carriage Stepper Motor ☐		Encoder Type:	Glass ☐	Heidenhain ☐
ALE: ☐		Carriage ☐				
MPE: ☐		Drum Motor: ☐				
FDPE: ☐		Drum Amp: ☐				

Other information: Enter add any other information that you feel may be useful to the remanufacturing team.