

CONFIDENTIAL: PROPERTY OF CREO PRODUCTS INC..

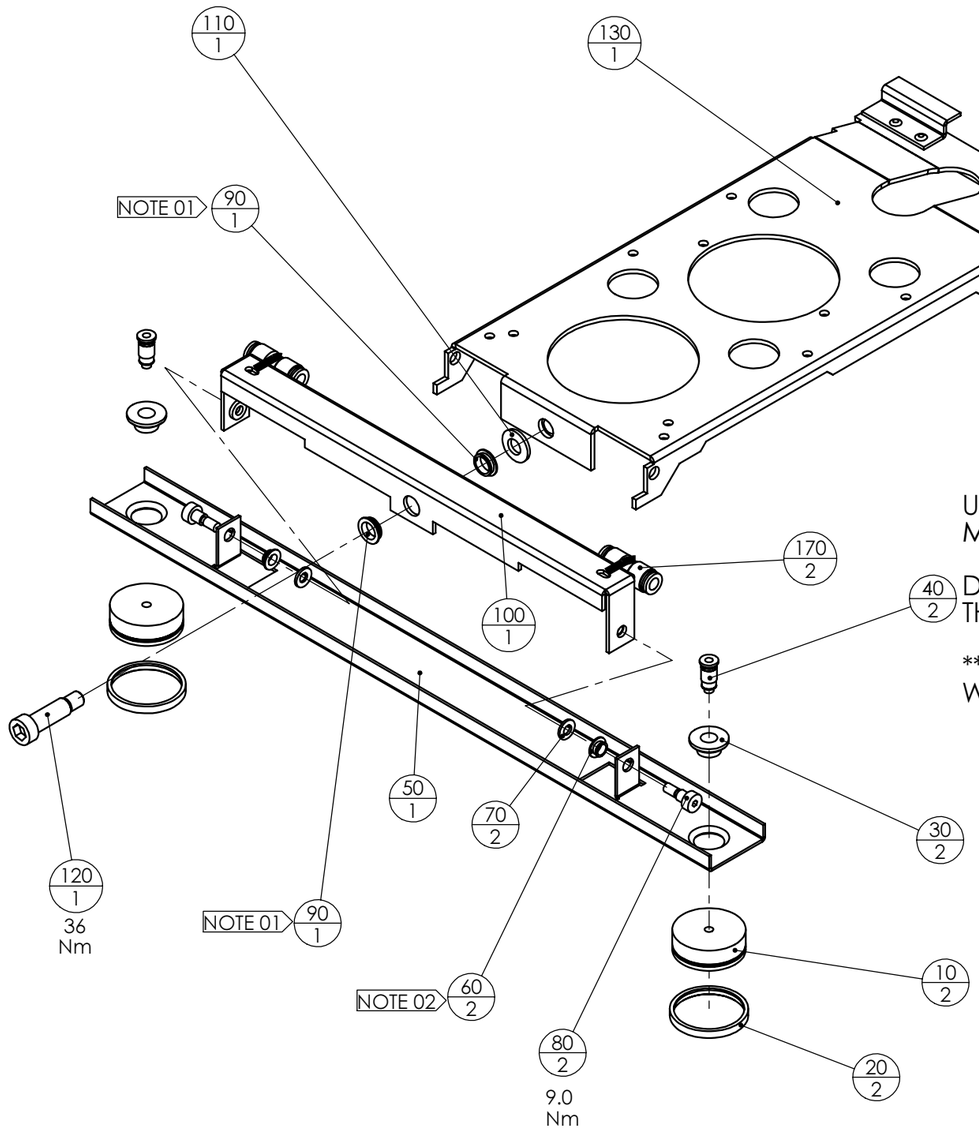

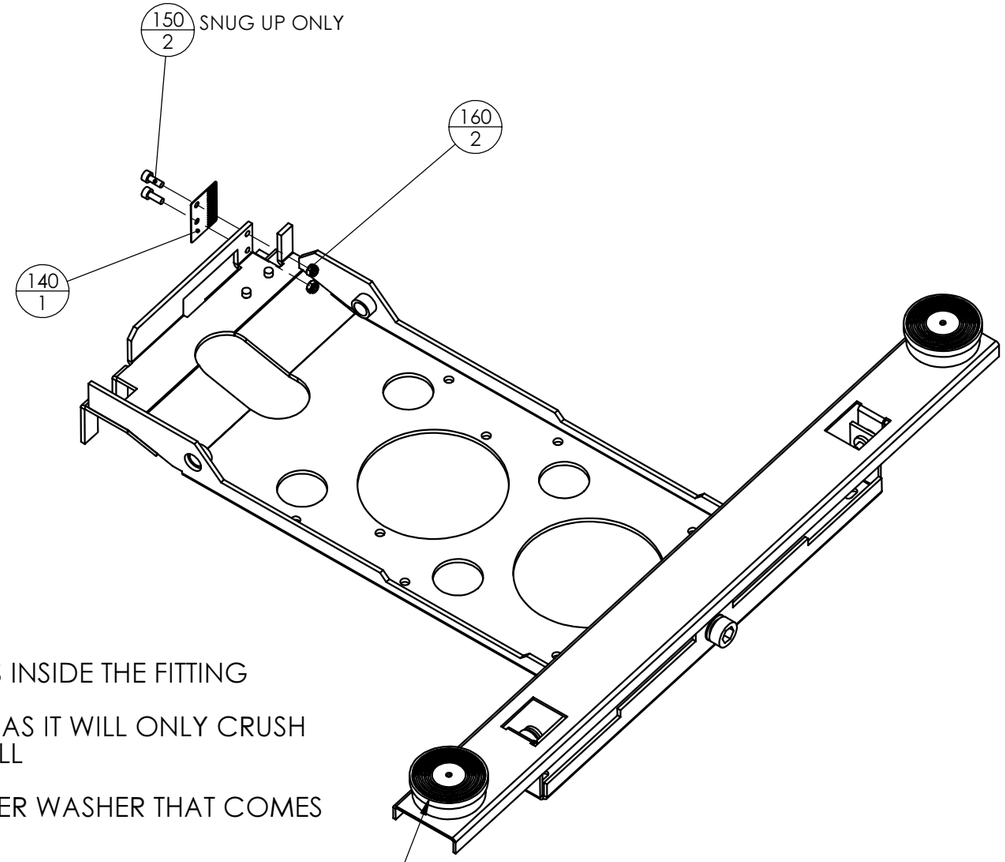

USE LOC-TITE 242
MAKE SURE NONE GETS INSIDE THE FITTING

DO NOT OVERTIGHTEN AS IT WILL ONLY CRUSH THE PLASTIC SWIVEL BALL

*** DO NOT USE THE FIBER WASHER THAT COMES WITH THE FITTING

MAKE SURE THE PLASTIC RINGS DO NOT PROTRUDE BELOW THE BOTTOM SURFACE OF THE P-CUP.

IF THEY DO, CAREFULLY TRIM THE PLASTIC WITH A SHARP EXACTO KNIFE

NOTES:

1. INSTALL BSHG WITH FLANGE TO OUTSIDE AS SHOWN, 2 PLCS.
2. INSTALL BSHG WITH FLANGE TO INSIDE AS SHOWN, 2 PLCS.

NOTE: DO NOT USE LOCTITE ON THIS ASSEMBLY UNLESS SPECIFIED.

REV	ECO	DATE	DRAWING CHANGES BY	APPROVED BY
---	---	---	---	---
A	E358	AUG 30/2001	JON DAHLGREN	JON DAHLGREN

CreoScitex

ASSY, MECH, P-CUP PICKER, VAL


© 2000 CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY			
J DAHLGREN	D WOODBURN			
MILLIMETERS UNLESS SPECIFIED	DATE: APR 8:2001	SIZE B	SCALE 1:3	
PART NO. 50-1747C	REV A	DOC AD	SHEET 1	OF 2

CONFIDENTIAL: PROPERTY OF CREO PRODUCTS INC.


IMPORTANT!
P-CUPS MUST BE FREE TO SWIVEL
AND SHOULD HANG STRAIGHT DOWN
WHEN TUBING IS CONNECTED.

THE TUBE MUST NOT CAUSE THE PCUP
TO SWING TO THE SIDE

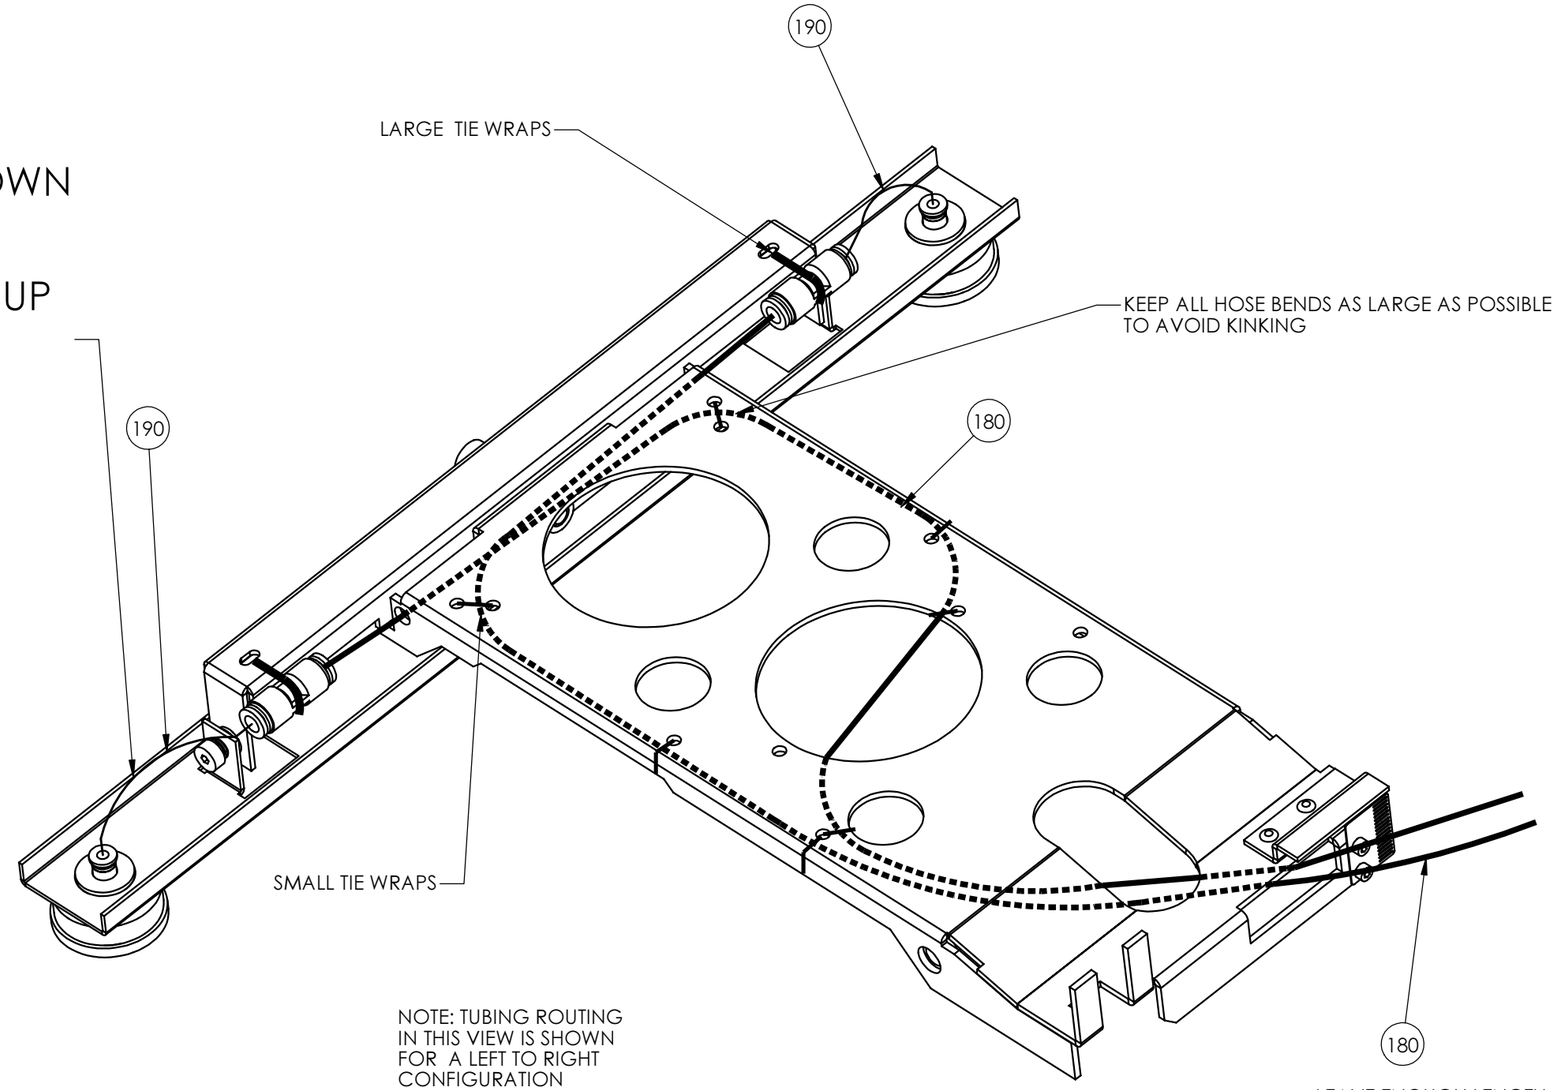

NOTE: TUBING ROUTING
IN THIS VIEW IS SHOWN
FOR A LEFT TO RIGHT
CONFIGURATION

LEAVE ENOUGH LENGTH
ON THESE HOSES TO
REACH THE MANIFOLD

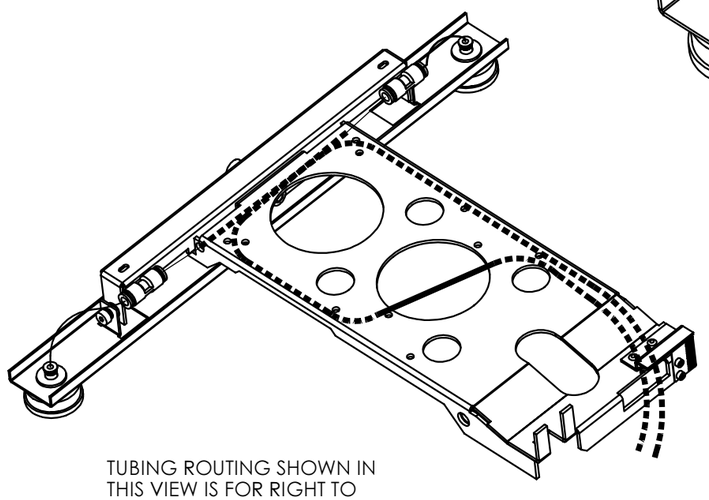

TUBING ROUTING SHOWN IN
THIS VIEW IS FOR RIGHT TO
LEFT CONFIGURATION

TUBING ROUTING

NOTE: DO NOT USE LOCTITE ON THIS ASSEMBLY UNLESS SPECIFIED.

CREO

ASSY,MECH,
P-CUP PICKER,
VAL

© 2000 CREO PRODUCTS INC.

DESIGNED BY	DRAWN BY		
J DAHLGREN	D WOODBURN		
MILLIMETERS UNLESS SPECIFIED	DATE: APR 8:2001	SIZE B	SCALE 1:2

PART NO.	REV	DOC	SHEET	OF
50-1747C	A	AD	2	2